


# York YCAM/B 525

## Specifications

Brand	York
Type	YCAM/B 525
Product type	Air Cooled Chiller
Capacité kW	374,0
Capacity Tons	106,3
Réfrigérant	Freon
Refrigerant Type	R407C
Weight	4500
Sizes	4880x2330x2200 mm (LxWxH)
Compressor(s) type & model	2x Refcomp SRC-F-258-L2
Display	York Millennium control center
Number of fans	8
Fan specifications	1,5 kW - 890 RPM
Stock	1

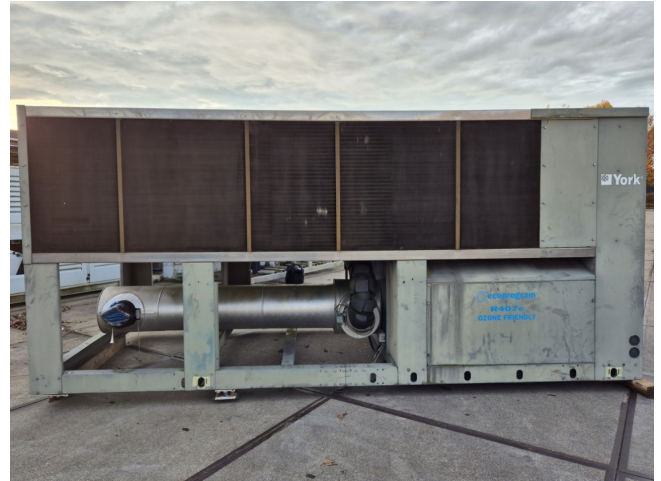


## Description

### Used York YCAM/B 525

Used York YCAM/B 525 TUV air-cooled chiller on R407C. Complete with 2 Refcomp SRC-F-258-L2 semi-hermetic reciprocating compressors, condenser with 8 fans that produce an total airflow of 158.400 m<sup>3</sup>/h, shell and tube as evaporator and a control cabinet with a York Millenium controller. The chiller has a capacity of 374 kW at a water leaving temperature of 7°C and a condensing temperature of 35°C. \*All components of this used chiller will be tested on adequate performance, leak free condition (condensing blocks, compressors, fans, control panel and so forth). Choosing HOSBV means buying with warranty. We perform a industrial cleaning if requested we can arrange your shipment.



PER IL COLLEGAMENTO MODELLO 24V  
N MODELLO 24V CONNECTION  
R MODELLO 24V  
N FÜR VERBINDERMODELLE 24V  
R FÜR VERBINDERMODELLE 24V  
PER IL COLLEGAMENTO MODELLO 220V  
N MODELLO 220V CONNECTION  
R MODELLO 220V  
N FÜR VERBINDERMODELLE 220V  
R FÜR VERBINDERMODELLE 220V  
SCHLÜSSELTERMINALE OHNE STRIP  
SCHLÜSSELTERMINALE OHNE STRIP  
MOMENTI-TERMINALE BY CUSTOMER  
MOMENTI-TERMINALE BY CUSTOMER  
PARTS-BAUSETZE ANSCHLÜSS KLEMMEN  
PARTS-BAUSETZE ANSCHLÜSS KLEMMEN  
E  
SICHERUNG  
WATER-WIDERSTAND



**York**  
CE

CERTIFICATO DI COLLAUDO PRODOTTO  
YORK - PRODUCTION TEST CERTIFICATE  
UNITÀ: AP1A-AP1A/AP1A-COOL - SERVOCENTRALI D  
YCAM 8 525 TUV 001.462815105  
CHILLER  
1069906001  
1399

PROG. COLL. NUMBER CHECK	DESCRIZIONE DEI CHECKS
01	VERIFICA ASSEMBLAGGIO COMPLETE ASSEMBLY CHECK
02	VERIFICA VISIVA CABLAGGI COLLETTORI ELETTRICI E CONN. WIRING CONNECTIONS
03	VUOTO E CARICA REF. VACUUM AND CHARGE TEST
04	VERIFICA CON CERCAFUOGHE TEMPERATURA PRESSIONE E CORRENTE ELETTRICA E CONN. LEAK TEST
05	PROVE FUNZIONALI CON RILEVAMENTO TEMPERATURE PRESSIONI-RUN FUNCTION AND RUN TEST
06	VERIFICA INTERVENTI SICUREZZA OPERAZIONE E TEMPERATURA CHECK OPERATION AND SAFETY DEVICES
07	VERIFICA TENUTA CIRCUITO E FUNZIONAMENTO POMPA (SU RICHIEDIMENTO) PUMP CHECK ONLY FOR PACK
08	VERIFICA MONTAGGIO ACCESSORI PER PREVISI E DOCUMENTAZIONE CHECK ACCESSORIES/DOCUMENTATION
09	CONTROLLO ESTETICO FINALE E PULIZIA INTERNA VISUAL CHECK FOR DIRT AND DAMAGE

MODELLO YORK 8 525 TUV  
MATERIALE 1069906001

CARICA REFR. REFRIGERANT CHARGE 4070 Kg 15

DATI ELETTRICI ELECTRICAL DATA	V	ph	Hz
ALIM. POTENZA MAIN SUPPLY	400	3	50
ALIM. AUSILIARIA AUXILIARY SUPPLY	230	1	50
CORRENTE DI SPUNTO INrush	A 734		
CORRENTE A PIENO CARICO FULL LOAD	A 323		
POTENZA ASSORBITA POWER INPUT	Kw 170		
PRESS. ESERC. ACQUA WATER OPERATION PRESSURE	bar 10		
MASSA WEIGHT	Kg 4500		

COD. 035860011-050/-



