


Grundfos TP 80-120/2 AI-F-A-RUUE

Specifications

Brand	Grundfos
Type	TP 80-120/2 AI-F-A-RUUE
Volume flow Q max. (m ³ /h)	40,0
Delivery height H max. (m)	8,3
Power max. (kW)	1,5
Stock	2

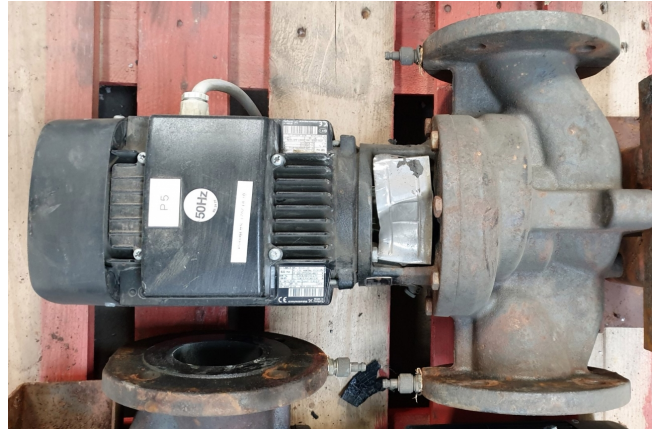

Description

Used Grundfos TP 80-120/2 AI-F-A-RUUE

Used Grundfos TP 80-120/2 AI-F-A-RUUE waterpump. The pump has a nominal flow of 40,0 m³/h and 2910 RPM. Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the "top-down" design, i.e. the motor, pump head and impeller can be removed for maintenance or service while the pump housing remains in the pipework. The pump is equipped with an unbalanced rubber bellows seal. The pump is equipped with a fan-cooled asynchronous motor.

