Bock HGX6/1240-4 S

Specifications

Brand	Bock
Type	HGX6/1240-4 S
Refrigerant	Freon
kW at +10ºC/+40ºC	81,7
kW at 0ºC/+40ºC	54,9
kW at -5ºC/+40ºC	44,1
kW at -10ºC/+40ºC	35,0
kW at -20ºC/+40ºC	20,9
kW at -30ºC/+40ºC	11,4
Unloaded Start	✓
m3 / h	107,6
Weight in kg.	222
Sizes	900x460x500 mm (LxWxH)
Stock	1

Description

Used Bock HGX6/1240-4 S

Used GEA HGX6/1240-4 S semi-hermetic reciprocating compressor with a sight glass on Freon. The compressors has a displacement of 107,6 m³/h at 50 Hz.
*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.

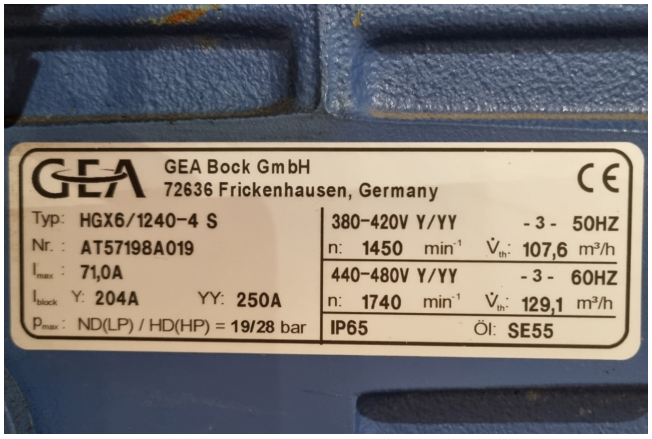
GEA Bock GmbH
72636 Frickenhausen, Germany
Typ: HGX6/1240-4 S
Nr.: AT57198A019
I_{max}: 71,0A
I_{block} Y: 204A YY: 250A
p_{max}: ND(LP) / HD(HP) = 19/28 bar
380-420V Y/YY - 3 - 50HZ
n: 1450 min^{-1} $\dot{V}_{th}$: 107,6 m³/h
440-480V Y/YY - 3 - 60HZ
n: 1740 min^{-1} $\dot{V}_{th}$: 129,1 m³/h
IP65 Öl: SE55

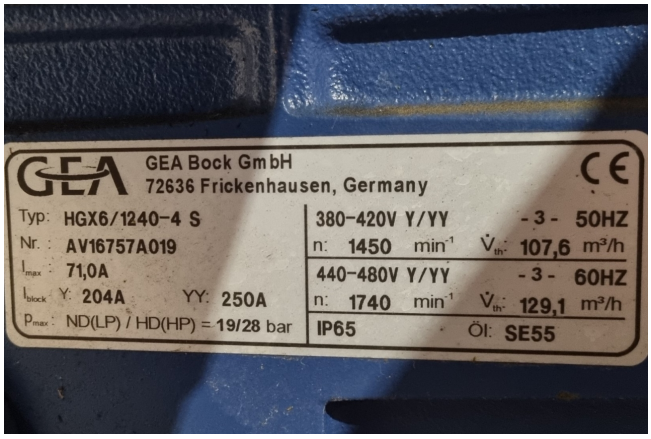
GEA Bock GmbH
72636 Frickenhausen, Germany
Typ: HGX6/1240-4 S
Nr.: AV16757A019
I_{max}: 71,0A
I_{block} Y: 204A YY: 250A
p_{max}: ND(LP) / HD(HP) = 19/28 bar
380-420V Y/YY - 3 - 50HZ
n: 1450 min^{-1} $\dot{V}_{th}$: 107,6 m³/h
440-480V Y/YY - 3 - 60HZ
n: 1740 min^{-1} $\dot{V}_{th}$: 129,1 m³/h
IP65 Öl: SE55