


Bitzer 4T-12.2

Specifications

Brand	Bitzer
Type	4T-12.2
Refrigerant	Freon
kW at 0°C/+40°C	32,7
kW at -5°C/+40°C	27,1
kW at -10°C/+40°C	22,3
kW at -20°C/+40°C	14,6
kW at -30°C/+40°C	8,9
kW at -40°C/+40°C	4,8
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Liquid receiver	✓
Liquid receiver ltr.	35
Oil separator	✓
Liquid line filter drier	✓
Sight Glass	✓
m ³ / h	39,4
Sizes	1300x590x1380 mm (LxWxH)
Stock	1

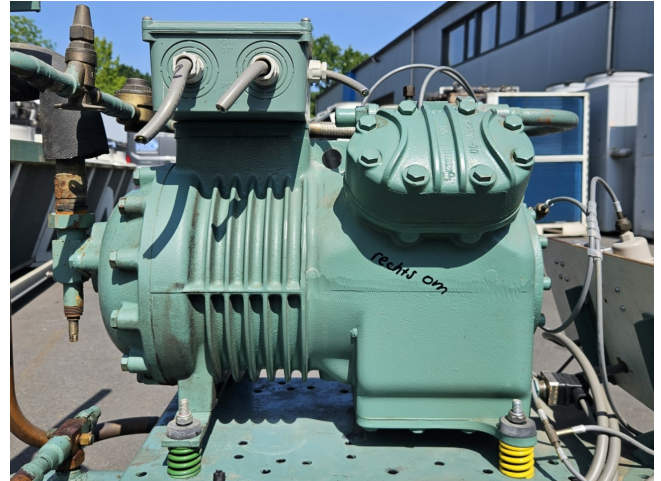

Description

Used Bitzer 4T-12.2

Used Bitzer 4T-12.2Y-40P unit on Freon. Complete with a Bitzer 4T-12.2Y-40P semi-hermetic reciprocating compressor, liquid receiver, oil separator and sight glass on a steel base frame. The compressor has a displacement of 50 Hz at 39,36 m³/h and 60 Hz at 47,5 m³/h.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.

