

Bitzer 2FC-2.2Y-40S (x1) & 2KC-05.2Y-40S (x1) Water-cooled condensing unit

Specifications

Brand	Bitzer
Type	2FC-2.2Y-40S (x1) & 2KC-05.2Y-40S (x1) Water-cooled condensing unit
Refrigerant	Freon
Refrigerant type	R134a
kW at +10°C/+40°C	9,7*
kW at 0°C/+40°C	6,4*
kW at -5°C/+40°C	5,1*
kW at -10°C/+40°C	4,0*
kW at -20°C/+40°C	2,3*
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Liquid line filter drier	✓
Sight Glass	✓
m3 / h	13,6
Remarks	Y.o.b. 2012 (s.nr: 1682201507), y.o.b. 2005 (s.nr: 1269001709)



	Freon type: R134a
Refrigerating Unit	*Capacity based on
Sizes	950x800x1300 mm (LxWxH)
Stock	1


Description

Used Bitzer 2FC-2.2Y-40S (x1) & 2KC-05.2Y-40S (x1) Water-cooled condensing unit

Used Bitzer water-cooled condensing unit on Freon. Complete with a Bitzer 2FC-2.2Y-40S (x1) & 2KC-05.2Y-40S (x1) semi-hermetic compressors, 2 Bitzer K073H shell and tube condensers, 2 liquid line filter driers, pressure and safety switches/gauges, sight glasses and a control cabinet with a 2 displays. The compressors have a displacement of 13,6 m³/h at 50 Hz.

*Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and deliver after an industrial cleaning. *If requested we are happy to arrange your logistics.



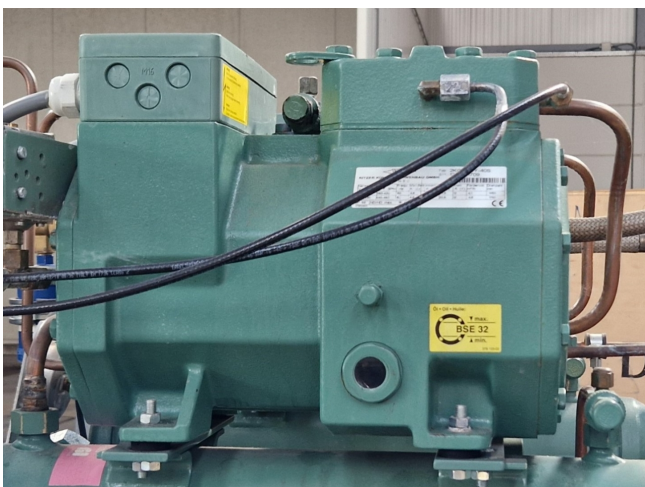

Typ 2KC-05.2Y-40S

SNr 1269001709

BITZER KÜHLMASCHINENBAU GMBH

Made in E.C.

Nennspannung		Frequ	Max Betrstrom		Anlaufstrom		Fördervol	Drehzahl
V A 3Ph~	V Y 3Ph~	Hz	A (Δ)	A (Y)	A (Δ)	A (Y)	m³/h	min⁻¹
220-240	380-420	50	4,6	2,7	20,8	12	4,1	1450
265-290	440-480	60	4,6	2,7	20,8	12	4,9	1750

P 65 ND/HD max. 19 / 28 bar

17802801

