# Bitzer CSHP7563-80P-40P (x1) & CSHP6563-60P-40P (x1)

## Specifications

| | |
|---|---|
| Brand | Bitzer |
| Type | CSHP7563-80P-40P (x1) & CSHP6563-60P-40P (x1) |
| Product type | Air Cooled Chiller |
| Capacity kW | 278,3 |
| Capacity Tons | 79,1 |
| Refrigerant | Other |
| Refrigerant Type | R290 / Propane |
| Pump | ✓ |
| Sizes | 10050x2250x2200 mm (LxWxH) |
| Compressor(s) type & model | 1x Bitzer CSHP7563-80P-40P & Bitzer CSHP6563-60P-40P (x1) |
| Number of fans | 8 |
| Fan specifications | 50/60 Hz - 0,9 kW - 770 RPM - diameter 800 mm |
| Remarks \| | Y.o.b. 2019 |
| Remarks \|\| | *Capacity with economizer |
| Stock | 1 |



## Description

### Used Bitzer CSHP7563-80P-40P (x1) & CSHP6563-60P-40P (x1)

Used Bitzer CSHP7563-80P-40P (x1) & CSHP6563-60P-40P (x1) air cooled chiller on Propane (R290). Complete with a Güntner GCHV PD 080.2NF/24E-49 condenser with 8 EBM-Papst S3G800-CG95-09 fans - 50/60 Hz - 0,9 kW - 770 RPM - diameter 800 mm, brazed heat exchanger as evaporator, 2 small heat exchangers as economizers, KSB ETL 050-050-160 water pump, pressur and safety switches/gauges and a control cabinet with an Emotron FDU48-105 frequency drive. The compressor has a displacement of 397 m³/h at 50 Hz & 479 m³/h at 60 Hz.
*All components of this used chiller will

be tested on adequate performance, leak free condition (condensing blocks, compressors, fans, control panel and so forth). Choosing HOSBV means buying with warranty. We perform a industrial cleaning if requested we can arrange your shipment.







van Abeelen










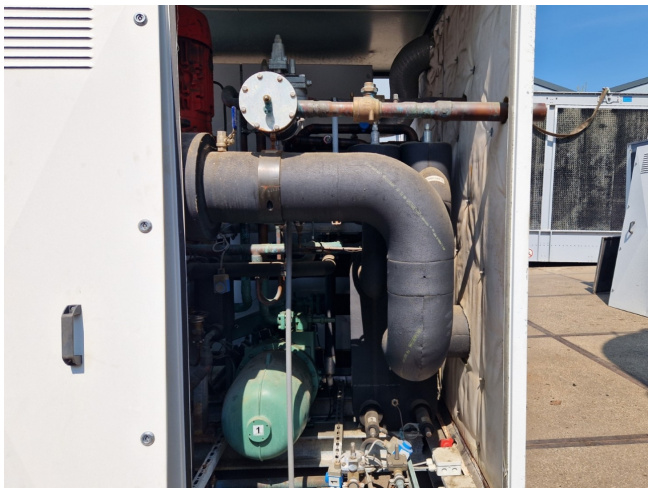






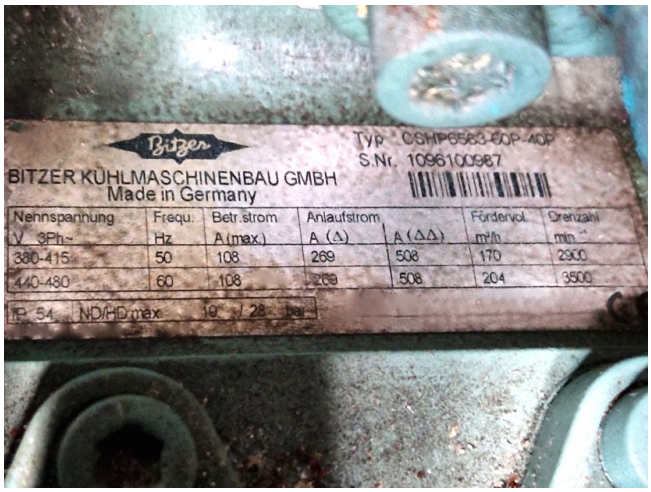



Bitzer
Typ CSHP9563-60P-40P
S.Nr. 1096100987
BITZER KÜHLMASCHINENBAU GMBH
Made in Germany
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A(max.) | Anlaufstrom A (Δ) | A (ΔΔ) | Fördervol. m³/h | Drehzahl min⁻¹
380-415 | 50 | 108 | 269 | 508 | 170 | 2900
440-480 | 60 | 108 | 269 | 508 | 204 | 3500
IP 54 ND/HD max. 19 / 28 bar


Bitzer
Typ CSHP7563-60P-40P
S.Nr. 1096101195
BITZER KÜHLMASCHINENBAU GMBH
Made in Germany
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A(max.) | Anlaufstrom A (Δ) | A (ΔΔ) | Fördervol. m³/h | Drehzahl min⁻¹
380-415 | 50 | 144 | 350 | 585 | 227 | 2900
440-480 | 60 | 144 | 350 | 585 | 274 | 3500
IP 54 ND/HD max. 19 / 28 bar



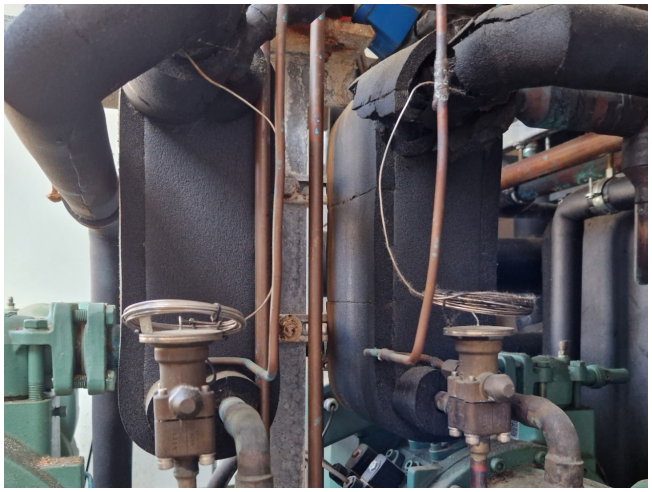

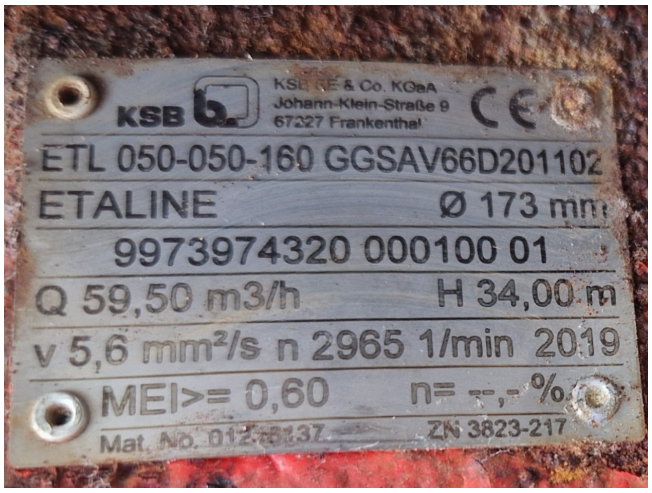



KSB
Johann-Klein-Straße 9
67227 Frankenthal
ETL 050-050-160 GGSAV66D201102
ETALINE
Ø 173 mm
9973974320 000100 01
Q 59,50 m3/h
H 34,00 m
v 5,6 mm²/s n 2965 1/min 2019
MEI>= 0,60
n= -,- %
ZN 3823-217


COMPRESSOR 1
COMPRESSOR 2





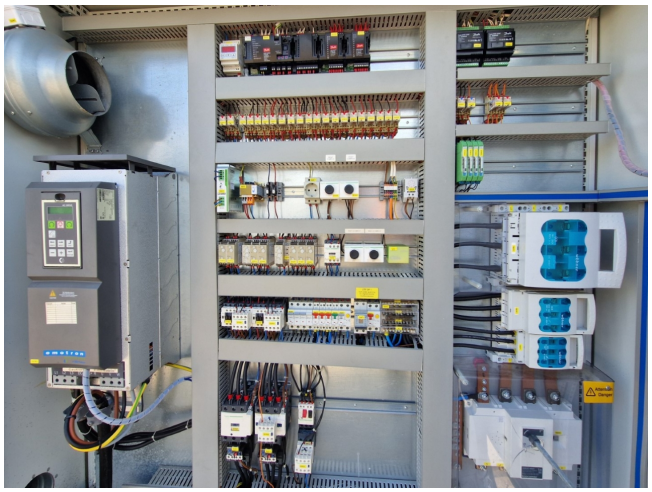


emotron


EMOTRON FDU 2.0 - AC drive
Type FDU48-105 20CE--AAVNNNNAP-
Input: 3x380-480V 91A 45 - 65Hz
Output: 0 - Input VAC 0 - 400Hz
Normal duty: Inom: 105A
Heavy duty: Inom: 88A
Enclosure: IP20
Fuse, amb temp & ratings: See instruction manual
PN: FDU48105
SN: M7210018410117
Made by Crompton Greaves Ltd
CG Drives & Automation













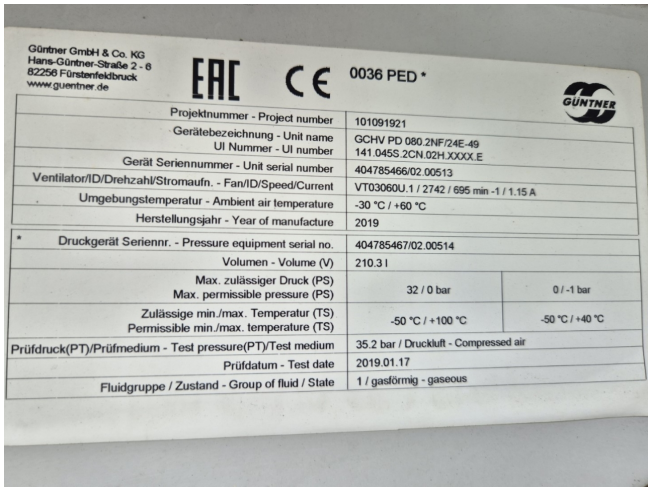


Güntner GmbH & Co. KG
Hans-Güntner-Straße 2 - 6
82256 Fürstenfeldbruck
www.guentner.de
EAC
CE
0036 PED *
GÜNTNER
Projektnummer - Project number
101091921
Gerätebezeichnung - Unit name
UI Nummer - UI number
GCHV PD 080.2NF/24E-49
141.045S.2CN.02H.XXXX.E
Gerät Seriennummer - Unit serial number
404785466/02.00513
Ventilator/ID/Drehzahl/Stromaufn. - Fan/ID/Speed/Current
VT03060U.1 / 2742 / 695 min -1 / 1.15 A
Umgebungstemperatur - Ambient air temperature
-30 °C / +60 °C
Herstellungsjahr - Year of manufacture
2019
* Druckgerät Seriennr. - Pressure equipment serial no.
404785467/02.00514
Volumen - Volume (V)
210.3 l
Max. zulässiger Druck (PS)
Max. permissible pressure (PS)
32 / 0 bar
0 / -1 bar
Zulässige min./max. Temperatur (TS)
Permissible min./max. temperature (TS)
-50 °C / +100 °C
-50 °C / +40 °C
Prüfdruck(PT)/Prüfmedium - Test pressure(PT)/Test medium
35.2 bar / Druckluft - Compressed air
Prüfdatum - Test date
2019.01.17
Fluidgruppe / Zustand - Group of fluid / State
1 / gasförmig - gaseous


8


S3G800-CG95-09
3~ 380-480VAC 50/60
-48 3% (A static)

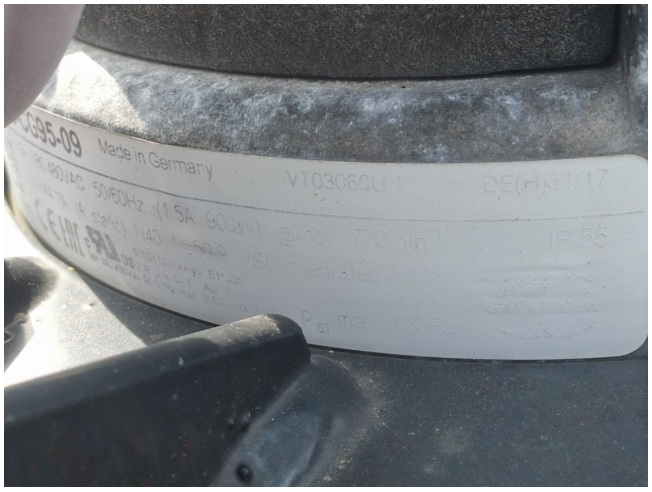
Made in Germany



