

Bitzer 4DC-7.2Y-40S (x1) & 2HSL-3K-40S (x1) & 2JSL-2K-40S (x1) & 6JE-22Y-40S (x2) & 4GE-20Y-40P (x1) & 4PES-15Y-40P (x2)

Specifications

Brand	Bitzer
Type	4DC-7.2Y-40S (x1) & 2HSL-3K-40S (x1) & 2JSL-2K-40S (x1) & 6JE-22Y-40S (x2) & 4GE-20Y-40P (x1) & 4PES-15Y-40P (x2)
Refrigerant	Freon
Refrigerant type	Freon / CO2
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Condensing pressure switches	✓
Liquid receiver	✓
Oil separator	✓
Oil level system AC&R	✓
Liquid line filter drier	✓
Sight Glass	✓
Control panel	✓
Remarks	Y.o.b. 2012





Package / Rack	✓
Sizes	3920x1860x2420 mm (LxWxH)
Stock	1

Description

Used Bitzer 4DC-7.2Y-40S (x1) & 2HSL-3K-40S (x1) & 2JSL-2K-40S (x1) & 6JE-22Y-40S (x2) & 4GE-20Y-40P (x1) & 4PES-15Y-40P (x2)

Used Bitzer 4DC-7.2Y-40S (x1) & 2HSL-3K-40S (x1) & 2JSL-2K-40S (x1) & 6JE-22Y-40S (x3) & 4PES-15Y-40P (x2) semi-hermetic reciprocating compressor rack on Freon / CO2. Complete with brazed heat exchangers for heat recovery, liquid receiver, pressure and safety switches/gauges and a control cabinet with frequency drives and Danfoss controllers.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and an industrial cleaning. *Optionally we can also perform a new paint job and arrange the logistics.

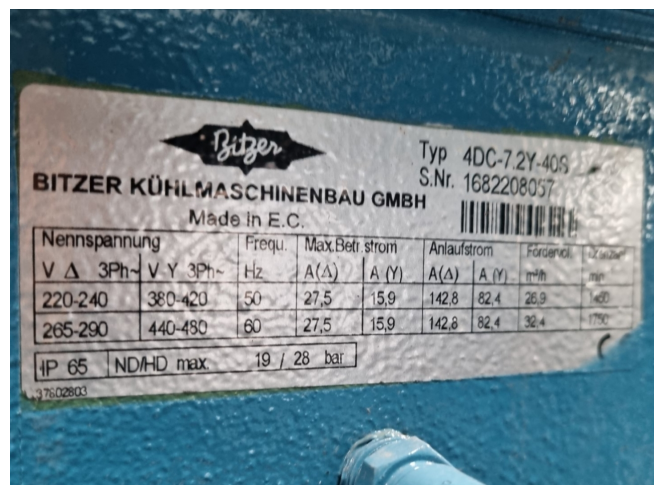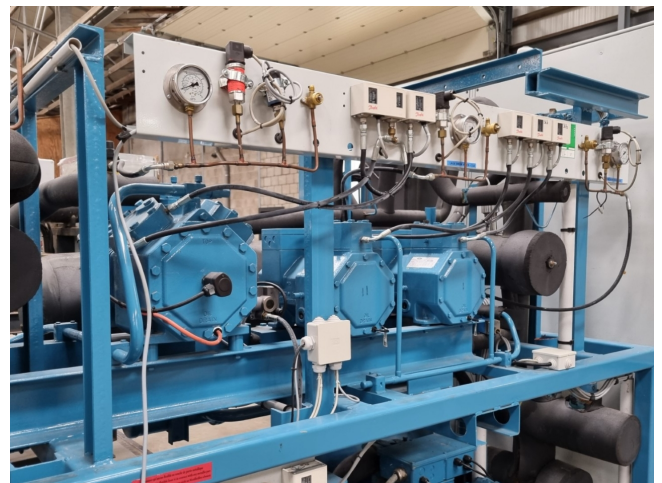

Bitzer Typ 4DC-7.2Y-40S
S.Nr. 1682208057
Made in E.C.

Nennspannung	Frequ.	Max. Betr. strom		Anlaufstrom		Fördersch.		
		A (Δ)	A (Y)	A (Δ)	A (Y)	m³/h	kg/h	
220-240	380-420	50	27,5	15,9	142,8	82,4	26,9	1400
265-290	440-480	60	27,5	15,9	142,8	82,4	32,4	1700

IP 65 ND/HD max. 19 / 28 bar

