Bitzer 4NES-12Y-40P (70 Hz)

Specifications

Brand	Bitzer
Type	4NES-12Y-40P (70 Hz)
Refrigerant	Freon
kW at 0ºC/+40ºC	29,0
kW at -5ºC/+40ºC	23,1
kW at -10ºC/+40ºC	18,1
kW at -20ºC/+40ºC	10,4
Sight Glass	✓
m3 / h	56,2 m³/h at 50 Hz & 79,5 m³/h at 70 Hz
Remarks |	Y.o.b. 2013
Remarks ||	Capacity based on R134A
Weight in kg.	146
Sizes	720x350x400 mm (LxWxH)
Stock	2

Description

Used Bitzer 4NES-12Y-40P (70 Hz)

Used Bitzer 4NES-12Y-40P semi-hermetic reciprocating compressor on Freon with a sight glass. The compressor has a displacement of 56,2 m³/h at 50 Hz & 79,5 m³/h at 70 Hz. Capacity based on R134A.
*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.
*Optional we can also perform a new paint job and arrange the logistics.

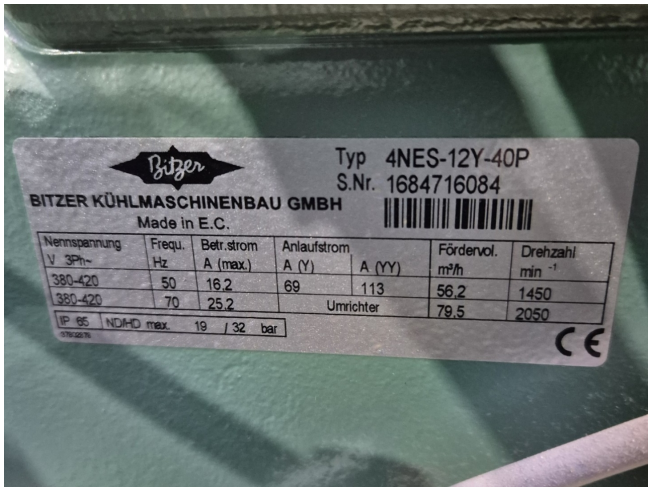
Typ 4NES-12Y-40P
S.Nr. 1684716084
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | Anlaufstrom A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 16,2 | 69 | 113 | 56,2 | 1450
380-420 | 70 | 25,2 | Umrichter | | 79,5 | 2050
IP 65 | ND/HD max. 19 / 32 bar
37802678

Typ 4NES-12Y-40P
S.Nr. 1684716087
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | Anlaufstrom A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 16,2 | 69 | 113 | 56,2 | 1450
380-420 | 70 | 25,2 | Umrichter | | 79,5 | 2050
IP 65 | ND/HD max. 19 / 32 bar
37802678

Typ 4NES-12Y-40P
S.Nr. 1684716526
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | Anlaufstrom A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 16,2 | 69 | 113 | 56,2 | 1450
380-420 | 70 | 25,2 | Umrichter | | 79,5 | 2050
IP 65 | ND/HD max. 19 / 32 bar

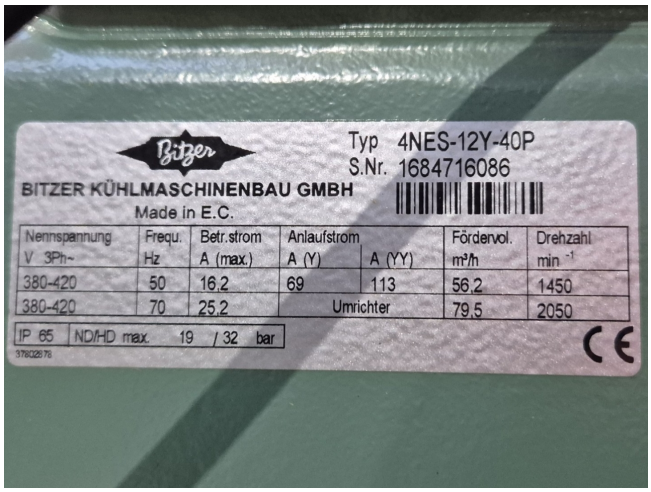
Typ 4NES-12Y-40P
S.Nr. 1684716086
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | Anlaufstrom A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 16,2 | 69 | 113 | 56,2 | 1450
380-420 | 70 | 25,2 | Umrichter | | 79,5 | 2050
IP 65 | ND/HD max. 19 / 32 bar
37802678