

Bitzer 4G-30.2 / 6G-40.2

Specifications

Brand	Bitzer
Туре	4G-30.2 / 6G-40.2
Refrigerant	Freon
kW at 0ºC/+40ºC	171,2
kW at -5ºC/+40ºC	142,4
kW at -10ºC/+40ºC	117,3
kW at -20ºC/+40ºC	76,7
kW at -30ºC/+40ºC	46,6
Unloaded Start	1
Capacity Control	✓
On steel base frame	1
Pressure safety switches	1
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Liquid receiver	✓
Liquid receiver ltr.	200
Oil level system AC&R	✓
Liquid line filter drier	1
Sight Glass	✓
Control panel	✓
Remarks	R404a – R22 or other
	freon types
Package / Rack	1
Sizes	2000x1600x1900 mm
	(LxWxH)
Stock	1



Description

Used Bitzer 4G-30.2 / 6G-40.2

Used Bitzer 4G-30.2 / 6G-40.2 freon compressor rack, complete with unloaded start, capacity control, pressure safety switches, pressure gauges, oil level system, liquid line filter drier, sight glass, control panel and liquid receiver with a volume of 200 liters.

Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and deliver after an industrial cleaning. *If requested we are happy to arrange your logistics.


























www.hosbv.com





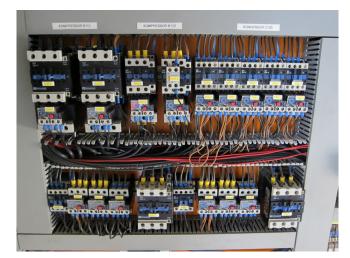











UNTNER GMbH FÜRSTENFELDBRUCK					
HERST NR. 6620950 BAUJAHR 1996					
Medium	Zulässig. Überdruck	Betriebs- Temp	Gesamtinhalt Liter	Druck zur Minustemp.	
	28bar	92°C	200	bar/ °C	
Aust Zusatzschild ja nein Baumusterkennzeichen: ZU					