Güntner S-GGHF 050.1D/37-AS/8P

Specifications

Brand	Güntner
Type	S-GGHF 050.1D/37-AS/8P
kW	32.6
Refrigerant	Glycol
Number of Fans	3
Fin Space in mm	7
Defrosting	Electric
m³/h	19.920
Sizes	3363x713x747MM (LxWxH)
Remarks |	Y.o.b. 2009
Stock	2

Description

Used Güntner S-GGHF 050.1D/37-AS/8P

Size: 3363x713x747MM (LxWxH) Weight: 209 Kg Fin space: 7mm m3/h: 19.920 Fans: 3 Hertz fans: 50 Rpm: 1410 Refrigerant: Glycol Brand: Guntner Model: S-GGHF 050.1D/37-AS/8P **All components of this used evaporator(s) will be tested on good working, leak free condition (electro engine(s), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

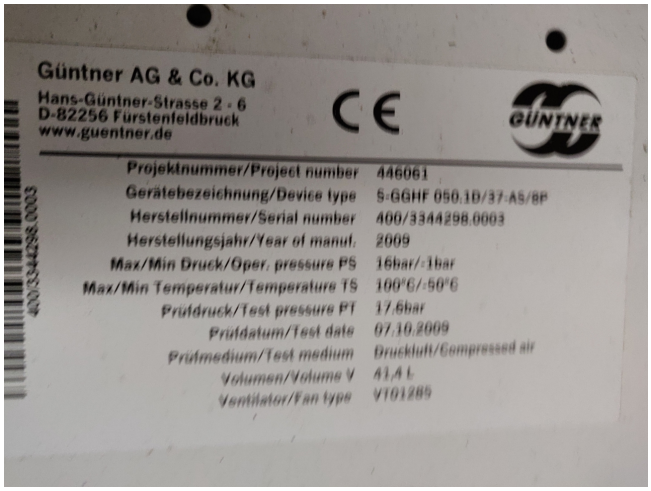
Güntner AG & Co. KG
Hans-Güntner-Strasse 2 - 6
D-82256 Fürstenfeldbruck
www.guentner.de
Projektnummer/Project number 446061
Gerätebezeichnung/Device type S-GGHF 050.1D/37-AS/8P
Herstellnummer/Serial number 400/3344298.0003
Herstellungsjahr/Year of manuf. 2009
Max/Min Druck/Oper. pressure PS 16bar/-1bar
Max/Min Temperatur/Temperature TS 100°C/-50°C
Prüfdruck/Test pressure PT 17.6bar
Prüfdatum/Test date 07.10.2009
Prüfmedium/Test medium Druckluft/Compressed air
Volumen/Volume V 41,4 L
Ventilator/Fan type VT01285


Güntner AG & Co. KG
Hans-Güntner-Strasse 2 - 6
D-82256 Fürstenfeldbruck
www.guentner.de
Projektnummer/Project number 446061
Gerätebezeichnung/Device type S-GGHF 050.1D/37-AS/8P
Herstellnummer/Serial number 400/3344299.0001
Herstellungsjahr/Year of manuf. 2009
Max/Min Druck/Oper. pressure PS 16bar/-1bar
Max/Min Temperatur/Temperature TS 100°C/-50°C
Prüfdruck/Test pressure PT 17.6bar
Prüfdatum/Test date 07.10.2009
Prüfmedium/Test medium Druckluft/Compressed air
Volumen/Volume V 41,4 L
Ventilator/Fan type VT01285


GÜNTNER
139948
09154347
FL050-4DK.4I.V5L
Made in Germany

GHF 50 Hz - 3 Ventilatoren - 3 Fans																						
Typ / Type	Nennleistung / Nominal capacity R404A/R507						Anschlüsse / Connections		El. Abtauheizung / El. defrost 230 V						Abmessungen / Dimensions							Ablauf / Drain
	SC2 DT1 = 8K t_0 = – 8°C	SC3 DT1 = 7K t_0 = – 25°C	Fläche / Surface	Luftvolumenstrom / Airflow	Wurfweite / Airthrow	Schalldruck / Sound pressure level	Ein / Inlet	Aus / Outlet	Block / Coil	Tropfwanne / Drip tray	Gesamt / Total	Anschlußschema / Connection diagram	Rohrvolumen / Tube volume	Nettogewicht / Net weight	L	B	H	E	F	A		R
	kW	kW	m²	m³/h	m	dB(A)1m	mm Ø	mm Ø	W	W	kW	Typ	l	kg	mm	mm	mm	mm	mm	mm		NW"
020.1A/34-AW	2,45	1,99	11,4	2175	6	56	16*	18	1000	700	1,7	A	2,6	27	1313	362	326	1220	220	300		G¾
020.1B/34-AW	3,08	2,47	15,2	2100	5	56	16*	18	1000	700	1,7	A	3,4	29	1313	362	326	1220	220	300		G¾
031.1A/34-AW	4,74	3,66	19,9	4800	24	56	16*	18	1250	1000	2,25	A	4,4	49	1663	497	430	1570	295	300		G¾
≈ 031.1B/34-AW	6,1	4,74	26,6	4680	23	56	16*	22	1250	1000	2,25	A	5,8	53	1663	497	430	1570	295	300		G¾
031.1C/34-AW	8,2	6,5	39,8	4530	22	56	16*	28	2500	1000	3,5	A	8,7	60	1663	497	430	1570	295	300		G¾
≈ 040.1B/34-AW	11,7	9,3	49,1	9420	29	64	22*	35	3200	1250	4,45	A	10,3	86	2363	543	541	2040	419	400		G1¼
040.1C/34-AW	16,1	12,6	73,6	9210	28	64	22*	35	4800	1250	6,05	B	15,5	98	2363	543	541	2040	419	400		G1¼
045.1C/34-AW	25,7	20,3	115,6	15000	38	67	22*	42	9200	3300	12,5	B	23,8	156	3033	688	647	890	544	500		G1¼
045.1D/34-AW	30,5	24,4	154,2	14520	37	67	22*	54	9200	3300	12,5	B	31,8	186	3033	688	647	890	544	500		G1¼
050.1C/34-AS	33,9	26,5	151,6	19680	40	69	22*	54	12000	3300	15,3	D	31,0	190	3363	713	747	1000	544	550		G1¼
050.1D/34-AS	39,7	31,6	202,1	18810	39	69	28*	54	12000	3300	15,3	D	41,4	227	3363	713	747	1000	544	550		G1¼
020.1B/37-AW	2,30	1,82	9,1	2235	9	56	16*	18	1000	700	1,7	A	3,4	29	1313	362	326	1220	220	300		G¾
≈ 020.1C/37-AW	3,24	2,60	13,6	2145	8	56	16*	18	1000	700	1,7	A	5,2	33	1313	362	326	1220	220	300		G¾
≈ 031.1B/37-AW	4,58	3,63	15,9	5070	24	56	16*	22	1250	1000	2,25	A	5,8	47	1663	497	430	1570	295	300		G¾
≈ 031.1C/37-AW	6,6	5,0	23,8	4800	23	56	16*	22	2500	1000	3,5	A	8,7	53	1663	497	430	1570	295	300		G¾
031.1D/37-AW	8,1	6,5	31,8	4665	22	56	16*	35	2500	1000	3,5	A	11,6	64	1663	497	430	1570	295	300		G¾
≈ 040.1C/37-AW	12,5	9,9	44,1	9630	32	64	22*	35	4800	1250	6,05	B	15,5	89	2363	543	541	2040	419	400		G1¼
040.1D/37-AW	15,4	12,0	58,7	9090	31	64	22*	35	6400	1250	7,65	B	20,6	107	2363	543	541	2040	419	400		G1¼
045.1D/37-AW	25,3	19,6	92,3	15420	43	67	22*	42	9200	3300	12,5	B	31,8	169	3033	688	647	890	544	500		G1¼
045.1E/37-AW	29,0	22,8	115,3	14910	41	67	22*	54	11500	3300	14,8	B	39,7	180	3033	688	647	890	544	500		G1¼
050.1D/37-AS	32,6	26,1	120,9	19920	44	69	28*	54	12000	3300	15,3	D	41,4	209	3363	713	747	1000	544	550		G1¼
050.1E/37-AS	37,8	29,2	151,2	19320	43	69	22*	54	14400	3300	17,7	E	51,0	221	3363	713	747	1000	544	550		G1¼

≈ **Lagerprogramm, kurze Lieferzeit (4 Tage + Transport)**
Units in stock, short delivery times (4 days + transport)

* Mehrfacheinspritzung
* Multiple injection

Typ / Type

GHF020...
GHF031...