

Bock HAX5/830-4 (x1)(x2) complete fridge / freezer skid

Specifications

Brand	Bock
Type	HAX5/830-4 (x1)(x2) complete fridge / freezer skid
Refrigerant	Freon
kW at -20°C/+40°C	77.1
kW at -30°C/+40°C	47.458
kW at -40°C/+40°C	25.85
On steel base frame	✓
Pressure gauges	✓
Hp/Lp/Op	
Liquid receiver	✓
Liquid receiver ltr.	160 L
Oil separator	✓
Liquid line filter drier	✓
Sight Glass	✓
Package / Rack	✓
Stock	1





Description

Used Bock HAX5/830-4 (x1)(x2) complete fridge / freezer skid

Used Bock HAX5/830-4 (x3) complete fridge / freezer skid (3x) piston compressors Freon refrigeration. Our capacity table is based on the used type of Freon. with oil separator liquid tank and oil filter. You can also use these compressors on alternative types of Freon. For all the other specs (if

available), see the picture of the manufacturer model plate or the attached pdf file. *Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can arrange the logistics.

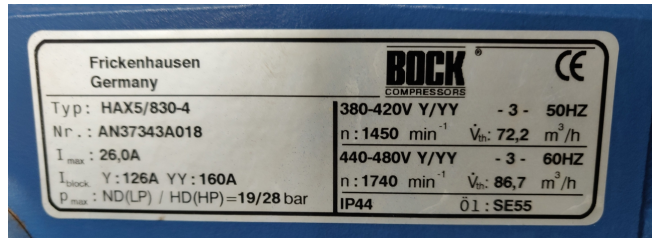

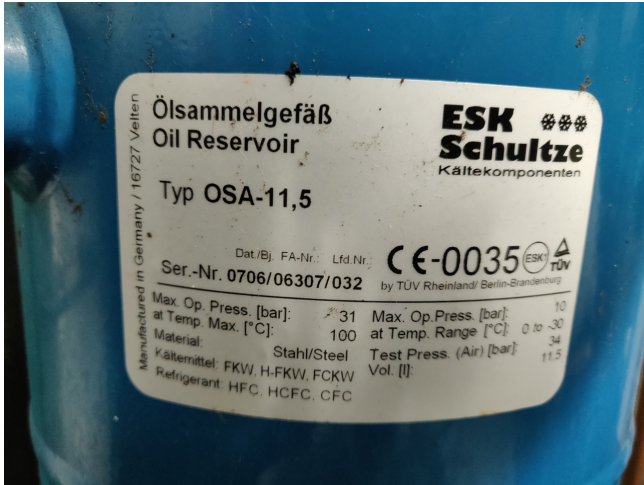

PERFORMANCE DATA

R404A/R507		50 Hz					
Type	Cond. temp. °C	Cooling capacity Q _c [kW]				Power consumption P _c [kW]	
		-20	-25	-30	-35	-40	-45
HAX4/665-4	30 Q	18700	15100	11900	9100	6800	4800
	30 F	7700	6300	5000	3900	3000	2200
	40 Q	15700	12600	9700	7400	5400	3900
	40 F	6300	5200	4200	3200	2400	1800
	50 Q	12900	10200	7800	5800	4200	2900
	50 F	6700	5500	4400	3300	2500	1900
HAX4/555-4	30 Q	21900	17600	13900	10600	8000	5600
	30 F	8800	7200	5800	4500	3400	2500
	40 Q	18400	14700	11500	8700	6400	4500
	40 F	8400	6900	5500	4200	3100	2300
	50 Q	15100	11900	9200	6900	5000	3600
	50 F	8900	7300	5900	4500	3400	2500
HAX4/650-4	30 Q	25000	20200	16000	12400	9300	6700
	30 F	9700	8000	6500	5000	3800	2800
	40 Q	21100	16900	13300	10200	7400	5200
	40 F	10300	8500	6900	5200	3900	2900
	50 Q	17200	13700	10600	8000	5800	4200
	50 F	10000	8400	6900	5200	3900	2900
HAX5/725-4	30 Q	26900	21500	16800	12800	9400	6800
	30 F	10400	8600	7000	5300	3900	2900
	40 Q	22700	18000	13900	10500	7500	5100
	40 F	11400	9500	7700	5900	4400	3200
	50 Q	18500	14600	11200	8200	5800	4200
	50 F	12000	10000	8200	6300	4700	3500
HAX5/830-4	30 Q	30400	24800	19100	14600	10800	7800
	30 F	12000	10000	8200	6300	4700	3500
	40 Q	26000	20800	15800	11900	8600	6100
	40 F	10800	9000	7300	5600	4100	3000
	50 Q	22000	17500	13500	10100	7300	5200
	50 F	11800	9800	8000	6100	4500	3300
HAX5/945-4	30 Q	28000	22500	16900	12600	9200	6600
	30 F	12200	10200	8300	6400	4700	3500
	40 Q	24000	19000	14300	10700	7800	5600
	40 F	11100	9200	7500	5700	4200	3100
	50 Q	20000	15500	11700	8700	6300	4500
	50 F	11000	9100	7400	5600	4100	3000
HAX6/1080-4	30 Q	33600	26400	20300	15100	10800	7800
	30 F	14700	12300	10000	7600	5600	4100
	40 Q	29000	23000	17600	13100	9600	6900
	40 F	13000	10800	8900	6800	5000	3700
	50 Q	25000	19500	14600	10900	7900	5700
	50 F	13500	11300	9200	7000	5100	3800
HAX6/1240-4	30 Q	36000	28800	22300	16600	12000	8800
	30 F	15600	13000	10600	8000	5800	4300
	40 Q	31000	24500	18700	13900	10000	7300
	40 F	14000	11700	9600	7300	5400	4000
	50 Q	27000	21000	15800	11700	8500	6100
	50 F	14500	12200	10000	7600	5600	4100
HAX6/1410-4	30 Q	38000	30400	23500	17400	12500	9100
	30 F	16200	13500	11000	8300	6000	4400
	40 Q	33000	26000	19800	14600	10500	7600
	40 F	14800	12400	10100	7700	5700	4200
	50 Q	29000	22500	16900	12600	9200	6600
	50 F	15000	12600	10300	7800	5800	4300

Relating to 20°C suction gas temperature without liquid subcooling
 Supplementary cooling or reduced suction gas temperature