

Bitzer 2FSL-4K-40S (x2) freeze unit

Specifications


Brand	Bitzer
Type	2FSL-4K-40S (x2) freeze unit
Refrigerant	CO2
kW at -30°C/+40°C	29.2 based on -10°C/-30°C
kW at -40°C/+40°C	22 based on -20°C/-40°C
On steel base frame	✓
Pressure gauges	✓
Hp/Lp/Op	
Oil separator	✓
Oil level system AC&R	✓
Liquid line filter drier	✓
Package / Rack	✓
Stock	1




Description

Used Bitzer 2FSL-4K-40S (x2) freeze unit

Used but in very good condition Bitzer 2FSL-4K-40S (x2) freeze unit with pressure gauges, oil separator and oil reservoir. For all the other specs, see the picture of the manufacturer model plate or the attached pdf file (if available). *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

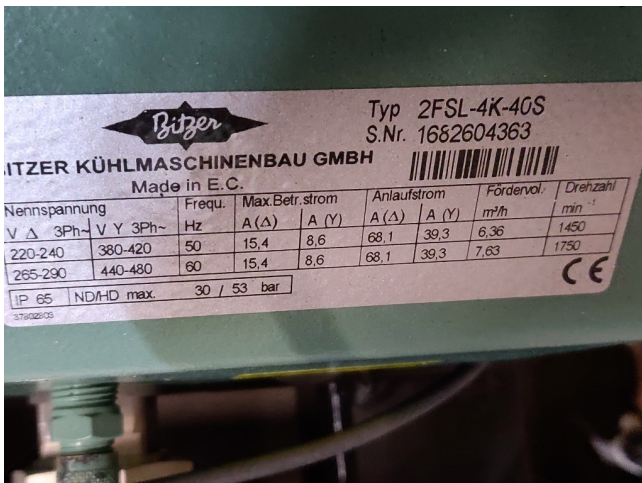

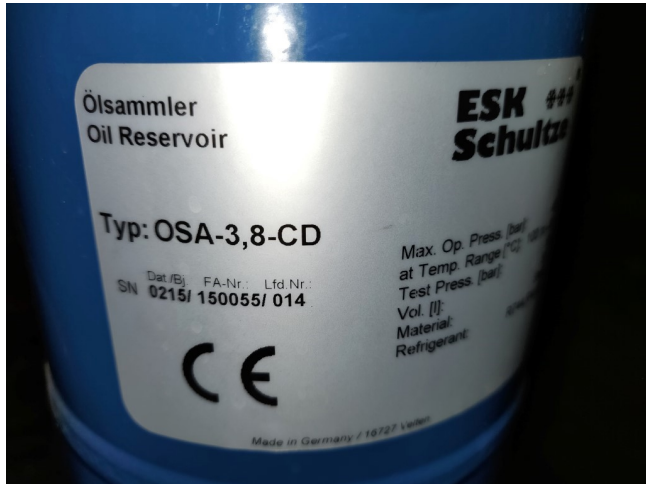

Compressor type Type de compresseur	Condensation temperature Température de condensation [°C]	Kälteleistung Cooling capacity Puissance frigorifique				Leistungsaufnahme Power consumption Puissance absorbée									
		Q ₀ [Watt]		P _e [kW]											
		Verdampfungstemperatur °C				Evaporation temperature °C				Température d'évaporation °C					
		-25	-30	-35	-40	-25	-30	-35	-40	-25	-30	-35	-40	-45	-50
2MSL-05K	-20	2380	2700	2480	1930	1480	1120	0,53	0,58	0,60	0,49	0,49	0,47	0,47	
	-10	3120	2470	2110	1620	1240	945	0,63	0,69	0,69	0,59	0,57	0,53	0,51	
	-5	2950	2300	1900	1500	1200	900	0,61	0,61	0,61	0,51	0,48	0,44	0,41	0,37
	5	2330	1820	1410				0,80	0,80	0,80					
2MSL-07K	-20	3440	3440	2650	1990	1480	1120	0,47	0,51	0,52	0,51	0,52	0,51		
	-10	4520	3600	2810	2140	1580	1140	0,65	0,67	0,64	0,63	0,59	0,55		
	-5	4110	3270	2540	1920	1440	985	0,68	0,71	0,71	0,62	0,57	0,52	0,48	0,45
	5	3380	2650	2020	1490			0,89	0,87	0,82					
2KSL-1K	-20	3040	2370	1780				0,99	0,95	0,88					
	-10	6880	4420	3350	2480			1,11	1,17	1,17	1,03	0,95	0,86	0,83	
	-5	7430	5090	3610	2700	1970	1070	1,00	1,01	1,00	1,03	0,99	0,96		
	5	6100	4420	3340	2400	1720	1117	1,11	1,17	1,17	1,13	1,09	1,06		
2MSL-2K	-20	5040	3950	3010				1,66	1,60	1,49					
	-10	7200						1,98			1,98	1,96	1,88	1,67	1,07
	-5	6620	7760	6070	4410	3300	1,98	1,19	1,29	1,51	1,34	1,29	1,28		
	5	6620	7760	6070	4410	3300	2,43	1,51	1,52	1,92	1,70	1,70	1,38	1,26	
2MSL-3K	-20	6160	4900	3750				2,16	2,09	1,96					
	-10	12050	9780	7780	6070	4410	3300	2,42	2,41	2,32	1,96	1,86	1,73	1,63	
	-5	11090	8950	7090	5490	4140	3300	2,73	1,89	1,91	1,96	1,75	1,61	1,51	
	5	9000	7350	5730	4350			3,22	2,41	2,32	2,18	1,92	1,58	1,33	1,33
2MSL-4K	-20	6160	4900	3750				2,16	2,09	1,96					
	-10	12050	9780	7780	6070	4410	3300	2,42	2,41	2,32	1,96	1,86	1,73	1,63	
	-5	11090	8950	7090	5490	4140	3300	2,73	1,89	1,91	1,96	1,75	1,61	1,51	
	5	9000	7350	5730	4350			3,22	2,41	2,32	2,18	1,92	1,58	1,33	1,33
2MSL-5K	-20	14210	11500	8950	7270	5580	4140	2,68	2,17	1,96	1,97	1,91	1,91	1,79	
	-10	18110	15000	8400	6600	5020	3710	2,07	2,20	2,22	2,19	2,07	1,91	1,79	
	-5	19250	8700	6880	5270			2,84	2,84	2,75	2,59				
	5	8440	7850					3,21	3,14						
2FSL-4K	-20	13700	10900	8400	6700	4740		2,10	2,34	2,47	1,96	1,96	1,96	1,94	
	-10	17940	14900	11800	9410	7320	5570	2,10	2,34	2,47	2,51	2,45	2,41	2,31	
	-5	16520	13500	10300	8350	6610	4990	2,61	2,78	2,87	2,78	2,69	2,59	2,49	
	5	13900	11200	8910	6910			3,63	3,66	3,58	3,49				
	5	12530	10080	7950				4,13	4,07	3,91					
		10210	13640	10590	8210						2,93	2,98			