

Helpman LEX 26 E

Specifications


Brand	Helpman
Type	LEX 26 E
kW	22.8
Refrigerant	Freon
Number of Fans	3
Fin Space in mm	7
Defrosting	Electric
m ³ /h	14 000
Sizes	2650x850x750 mm (LxWxH)
Remarks	Fan: 0,25 kW / 1410 RPM / Ø = 500 mm
Remarks	mix also with hot gas
Stock	12



Description

Used Helpman LEX 26 E

Used Helpman LEX 26-E (H) blow trough unit coolers with electric defrosting and with hot gas. **All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

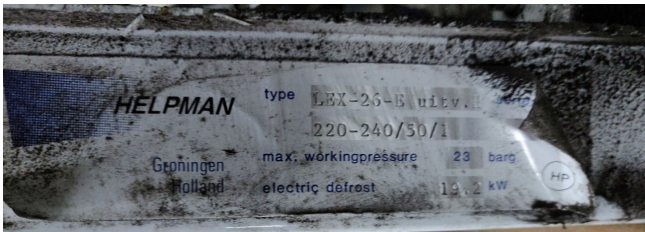

Fans / Electric Defrost											
Fans 50 Hz											
Cooler type	num-ber	dia- meter mm	air volume		air ² throw m	sound ³ level dB(A)	fan power		number of elements	Electric defrost	
			fin spacing 4 mm	fin spacing 7 mm			nominal ¹ 220/1 W	absorbed ⁴ 380/3 W		coil	defrost power ⁵ reduced kW
LEX 2-7	1	254	1030	1980	10	48	30/80	30/85	1	1	1.28
LEX 4-7	1	305	1420	1570	12	50	30/100	30/100	1	1	1.76
LEX 6-7	1	356	2490	2620	15	53	30/100	90/145	2	1	2.64
LEX 8-7	1	356	2490	2620	15	53	30/100	30/100	1	1	3.2
LEX 10-7	2	305	2970	3130	15	53	30/100	30/100	2	1	4.8
LEX 12-7	2	305	2970	3130	15	53	30/100	30/100	2	1	4.8
LEX 14-7	1	406	3360	3540	15	57	70/230	90/215	5	1	4.5
LEX 16-7	1	457	4430	4660	20	60	220/380	250/400	5	1	6.0
LEX 18-7	2	356	4980	5240	20	56	70/160	90/145	2	1	5.4
LEX 20-7	2	406	6730	7080	20	60	70/230	90/215	5	1	8.4
LEX 22-7	2	457	8850	9320	20	63	220/380	250/400	5	1	13.2
LEX 24-7	2	508	11000	11600	20	66	220/430	250/480	5	1	13.2
LEX 26-7	3	457	13000	14000	20	66	220/430	250/480	5	1	19.2
LEX 28-7	3	508	16600	17500	20	68	220/430	250/480	5	1	19.2
LEX 30-7	4	508	22200	23400	20	69	220/430	250/480	10	2	24.0

Fin spacing 7 mm						
LEX 2-7	1.3	1.2	1.3	1.1	1.0	1.2
LEX 4-7	1.7	1.4	1.7	1.5	1.2	1.4
LEX 6-7	2.5	2.2	2.5	2.2	1.9	2.2
LEX 8-7	4.1	3.7	4.3	3.6	3.3	3.7
LEX 10-7	3.7	3.6	4.0	3.2	3.2	3.5
LEX 12-7	5.0	4.9	5.3	4.4	4.3	4.6
LEX 14-7	5.5	5.5	6.0	4.8	4.8	5.2
LEX 16-7	7.4	7.3	8.0	6.4	6.3	7.0
LEX 18-7	8.5	7.8	8.8	7.4	6.8	7.6
LEX 20-7	11.4	10.0	11.4	9.9	8.7	9.9
LEX 22-7	14.5	12.4	14.3	12.6	10.7	12.4
LEX 24-7	18.1	15.6	17.8	15.7	13.5	15.5
LEX 26-7	22.8	21.2	23.4	19.8	18.4	20.4
LEX 28-7	28.5	26.5	29.3	24.8	23.0	25.5
LEX 30-7	36.5	31.0	35.9	31.7	27.0	31.2

