

Goedhart VCS 145610

Specifications



Brand	Goedhart
Type	VCS 145610
kW	70
Refrigerant	Freon
Number of Fans	4
Fin Space in mm	10
Defrosting	None
m ³ /h	39.673
Sizes	4856x1130x920
Remarks	401m ²
Volume	137dm ³
Weight	676kg
Stock	2



Description

Used Goedhart VCS 145610

Used evaporator build by Goedhart type VCS 145610 with 70kW 4 fans 50Hz, 3.1A, 401m², 137dm³, 39.673m³/h, weight 676kg.

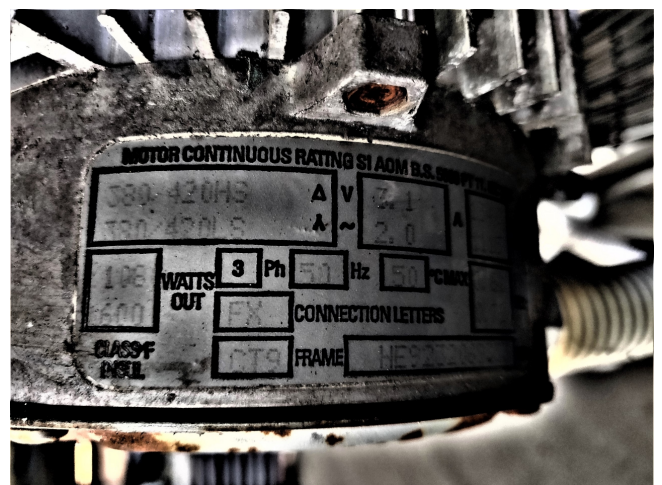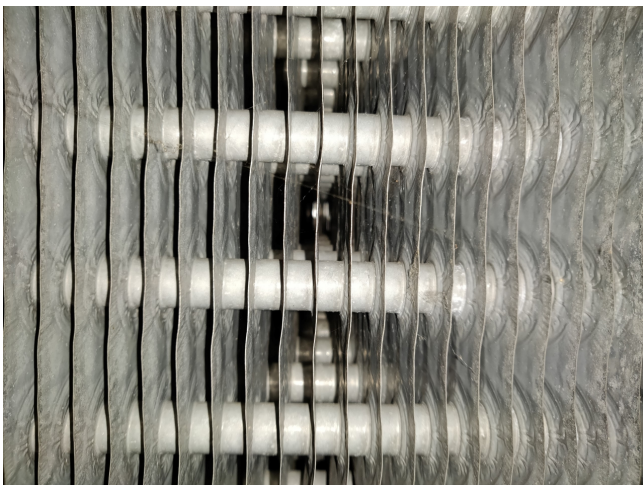

		3x400V-50Hz-4pole (1500 mm³/min.)					Dimensions										Connections								
		R404A															Refrigerant								
		Type VCI					Air volume	LpA @ 3 m (1/2" x 1/2")	Surface	Internal volume	Weight														
		DTI = t _{HC} (°C) (6.4/10)	DTI = t _{HC} (°C) (6.4/10)	DTI = t _{HC} (°C) (6.4/10)	DTI = t _{HC} (°C) (6.4/10)	DTI = t _{HC} (°C) (6.4/10)	(25/18)	(25/18)	(25/18)	(25/18)	(25/18)	L	B	H	C	E	E2	E3	D1	D2	In	Out	Hot gas	Air throw**	
		kW	kW	kW	kW	kW	dm³/h	dm²	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
4x	6.4.45.10	26,0	18,5	20998	61,3	131	45	283	3656	710	720	600	1628	1628				914	1828	16	35	35	22,5		
	8.4.45.10	30,7	22,5	20230	61,3	175	60	332	3656	810	720	700	1628	1628				914	1828	16	42	35	22,5		
	1.4.45.10	35,9	25,5	19504	61,3	219	75	380	3656	910	720	800	1628	1628				914	1828	16	42	35	22,5		
	6.4.50.10	34,7	24,7	29492	64,0	164	57	384	4456	830	720	700	2028	2028				1114	2228	16	42	35	25		
	8.4.50.10	42,5	30,1	28618	64,0	219	75	444	4456	930	720	800	2028	2028				1114	2228	16	42	35	25		
	1.4.50.10	48,9	34,3	27801	64,0	274	94	503	4456	1030	720	900	2028	2028				1114	2228	22	42	35	25		
	6.4.56.10	49,6	35,5	41615	67,7	241	83	511	4856	930	900	800	2228	2228				1214	2428	16	42	35	27,5		
	8.4.56.10	60,5	40,9	40587	67,7	321	110	595	4856	1030	900	900	2228	2228				1214	2428	22	54	35	27,5		
	1.4.56.10	70,0	48,1	39673	67,7	401	137	676	4856	1130	900	1000	2228	2228				1214	2428	22	54	35	27,5		
	6.4.63.10	64,2	45,5	51237	71,5	228	113	686	5256	945	1120	800	2428	2428				1314	2628	22	54	42	27,5		
	8.4.63.10	76,9	55,2	50412	71,5	438	150	794	5256	1045	1120	900	2428	2428				1314	2628	22	54	42	27,5		
	1.4.63.10	89,4	63,2	49586	71,5	547	187	899	5256	1145	1120	1000	2428	2428				1314	2628	22	54	42	27,5		