

# Helpman TR 16-4-7-152

## Specifications

|                   |                    |
|-------------------|--------------------|
| Brand             | Helpman            |
| Type              | TR 16-4-7-152      |
| kW                | 14                 |
| Refrigerant       | NH 3 (ammonia)     |
| Number of Fans    | 2                  |
| Fin Space in mm   | 7                  |
| Defrosting        | None               |
| m <sup>3</sup> /h | 13.000             |
| Sizes             | 1720x750x810 mm    |
| Remarks           | Y.o.b. 2002        |
| Volume            | 22 dm <sup>3</sup> |
| Weight            | 135 kg             |
| Stock             | 1                  |



## Description


### Used Helpman TR 16-4-7-152

Used Helpman TR 16-4-7-152 ammonia evaporator. Complete with 2 ATB fans 50 Hz- 0,37 kW - 1410 RPM.

\*All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.



|                                                                                                                                                                           |                        |              |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------|-----------|
| <b>HELPMAN</b><br>Apparatenfabriek Helpman BV<br>Peizerweg 97, 9727 AJ Groningen (NL)<br>Tel. ++31 50 5217555 / Fax ++31 50 5264878<br>info@helpman.com / www.helpman.com |                        |              |           |
| Type                                                                                                                                                                      | TR 16-4-7-152/NC4-400V |              |           |
| Serial number                                                                                                                                                             | 512048/s21/03          |              |           |
| Refrigerant                                                                                                                                                               | NH3                    |              |           |
| Operating temp.                                                                                                                                                           | 40/55                  | °C (min/max) |           |
| Design/test pressure                                                                                                                                                      | 20/25                  | bar          | Year 2002 |
| Internal volume                                                                                                                                                           | 22.0                   | dm³          | CE        |
| Weight (empty)                                                                                                                                                            | 135                    | Kg           |           |

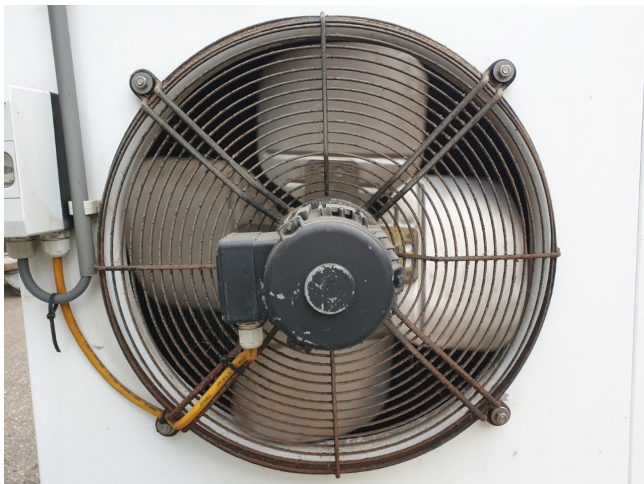

|                                                                                                 |  |                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>AFT71/4B-7 |  | 3~Mot 71<br>7997724 X 163<br>/W02 338288<br>YΔ 380-420/220-240 V<br>0,37 kW<br>50 Hz<br>cosφ 0,75<br>Th.Cl. F IP 55 EN 60034<br>HELPMAN-NR.: 300881<br>WSK 132°C |
|                                                                                                 |  | 140/2,40 A<br>1410 /min                                                                                                                                          |
|                                                                                                 |  | CE                                                                                                                                                               |

