

Model: MTZ40

Data

Type: Hermetic piston compressors

Producer: Maneurop

Series: MTZ

Model: MTZ40

Technical data

Cylinder count:	1
Displacement [m ³ /h]:	11,81
Cylinder capacity [cm ³]:	67,9
RPM [min ⁻¹]:	2900
Weight [kg]:	26
Oil charge [dm ³]:	1
Oil type:	160PZ
Crankcase heater type:	PTC 35 W
Maximum system test pressure low side / high side:	25 / 30
Maximum number of starts without softstart [1/h]:	12
Refrigerant charge limit [dm ³]:	3
Refrigerant:	R134a, 404A/R507, R407C
Sound power [dB]:	70
Sound power with accoustic hood [dB]:	65

Connections

	<u>milimeters</u>	<u>inches</u>
Suction Rotolock valve connection:		1 1/4"
Discharge Rotolock valve connection:		1"
Suction connection with supplied sleeve:		5/8"
Discharge connection with supplied sleeve:		1/2"

Approvals

CCC	+
CE	+
UL	+

Model: MTZ40

Capacity

Mass flow [kg/s]

$t_c \setminus t_e$	-15	-10	-5	0	5	10	15	20
35	68.25	85.22	104.60	126.60	151.43	179.29	210.38	244.91
40	67.05	84.16	103.66	125.74	150.61	178.47	209.52	243.98
45	65.51	82.71	102.25	124.33	149.17	176.96	207.90	242.21
50	63.63	80.83	100.34	122.36	147.09	174.74	205.50	239.59
55	61.37	78.51	97.92	119.80	144.35	171.78	202.29	236.09
60	-	75.73	94.96	116.63	140.93	168.07	198.26	231.69
65	-	-	-	112.82	136.80	163.59	193.38	226.37
70	-	-	-	-	-	158.30	187.62	220.11
75	-	-	-	-	-	-	180.98	212.89

C.O.P. [W/W]


$t_c \setminus t_e$	-15	-10	-5	0	5	10	15	20
35	2.31	2.70	3.15	3.65	4.24	4.94	5.79	6.83
40	2.06	2.41	2.80	3.24	3.74	4.33	5.02	5.84
45	1.83	2.15	2.49	2.87	3.30	3.79	4.35	5.02
50	1.63	1.91	2.21	2.54	2.91	3.32	3.78	4.32
55	1.44	1.70	1.96	2.24	2.55	2.89	3.28	3.71
60	-	1.49	1.72	1.97	2.23	2.52	2.83	3.19
65	-	-	-	1.71	1.93	2.17	2.44	2.73
70	-	-	-	-	-	1.85	2.07	2.32
75	-	-	-	-	-	-	1.74	1.94

Operating conditions: suction superheat: 11.1 K, subcooling: 8.3 K

t_c - Condensing temperature [°C]

t_e - Evaporating temperature [°C]

Application range

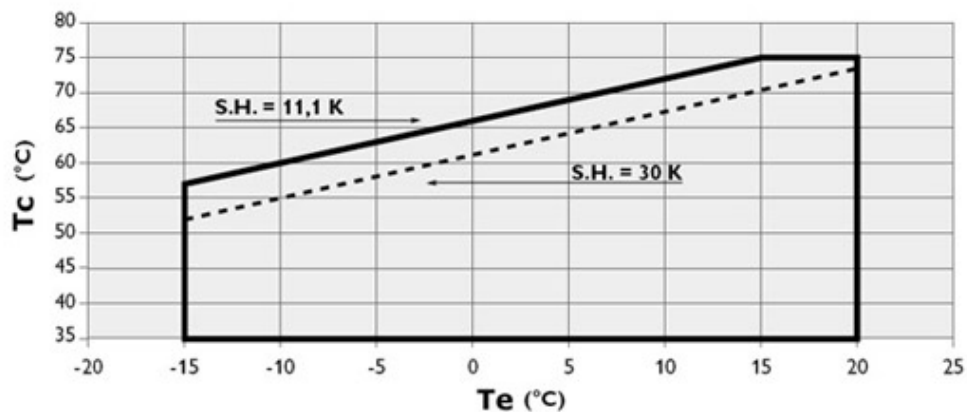

Model: MTZ40

Capacity

R404A/R507

Cooling capacity [W]

$t_c \setminus t_e$	-30	-25	-20	-15	-10	-5	0	5	10
30	2 448	3 330	4 396	5 669	7 172	8 925	10 953	13 277	15 919
35	2 168	2 997	3 993	5 177	6 573	8 202	10 087	12 250	14 713
40	1 885	2 659	3 581	4 674	5 959	7 461	9 200	11 200	13 482
45	1 601	2 316	3 161	4 159	5 333	6 704	8 294	10 128	12 225
50	1 314	1 968	2 734	3 635	4 693	5 930	7 370	9 033	10 944
55	-	1 616	2 300	3 101	4 040	5 141	6 427	7 918	9 638
60	-	1 262	1 860	2 557	3 376	4 338	5 466	6 782	8 308

Power input [W]

$t_c \setminus t_e$	-30	-25	-20	-15	-10	-5	0	5	10
30	1 685	1 940	2 176	2 393	2 590	2 766	2 921	3 056	3 169
35	1 696	1 977	2 237	2 477	2 697	2 896	3 073	3 229	3 363
40	1 703	2 013	2 302	2 571	2 818	3 043	3 247	3 429	3 587
45	1 702	2 046	2 368	2 669	2 948	3 205	3 439	3 650	3 839
50	1 689	2 070	2 430	2 767	3 083	3 375	3 644	3 890	4 112
55	-	2 082	2 483	2 862	3 218	3 550	3 859	4 144	4 404
60	-	2 077	2 524	2 949	3 349	3 726	4 079	4 406	4 709

Current [A]

$t_c \setminus t_e$	-30	-25	-20	-15	-10	-5	0	5	10
30	4.20	4.48	4.76	5.03	5.29	5.52	5.71	5.87	5.98
35	4.26	4.58	4.89	5.20	5.49	5.76	6.00	6.21	6.36
40	4.29	4.64	5.00	5.35	5.68	6.00	6.29	6.55	6.76
45	4.29	4.69	5.09	5.48	5.87	6.24	6.59	6.90	7.17
50	4.27	4.71	5.16	5.62	6.06	6.49	6.89	7.27	7.61
55	-	4.73	5.24	5.75	6.25	6.75	7.22	7.66	8.07
60	-	4.74	5.31	5.88	6.46	7.02	7.57	8.09	8.57

Model: MTZ40

Capacity

Mass flow [kg/s]

$t_c \setminus t_e$	-30	-25	-20	-15	-10	-5	0	5	10
30	77.06	102.46	131.80	165.60	204.35	248.56	298.74	355.38	418.98
35	73.41	98.94	128.20	161.70	199.94	243.42	292.65	348.14	410.37
40	69.20	94.83	123.99	157.16	194.86	237.60	285.86	340.16	401.00
45	64.38	90.09	119.10	151.93	189.07	231.02	278.29	331.38	390.80
50	58.86	84.63	113.48	145.93	182.48	223.63	269.88	321.74	379.71
55	-	78.38	107.05	139.10	175.03	215.35	260.56	311.16	367.65
60	-	71.29	99.75	131.37	166.66	206.12	250.26	299.57	354.57

C.O.P. [W/W]


$t_c \setminus t_e$	-30	-25	-20	-15	-10	-5	0	5	10
30	1.45	1.72	2.02	2.37	2.77	3.23	3.75	4.34	5.02
35	1.28	1.52	1.78	2.09	2.44	2.83	3.28	3.79	4.38
40	1.11	1.32	1.56	1.82	2.11	2.45	2.83	3.27	3.76
45	0.94	1.13	1.33	1.56	1.81	2.09	2.41	2.77	3.18
50	0.78	0.95	1.13	1.31	1.52	1.76	2.02	2.32	2.66
55	-	0.78	0.93	1.08	1.26	1.45	1.67	1.91	2.19
60	-	0.61	0.74	0.87	1.01	1.16	1.34	1.54	1.76

Operating conditions: suction superheat: 10 K, subcooling: 0 K

t_c - Condensing temperature [°C]

t_e - Evaporating temperature [°C]

Application range

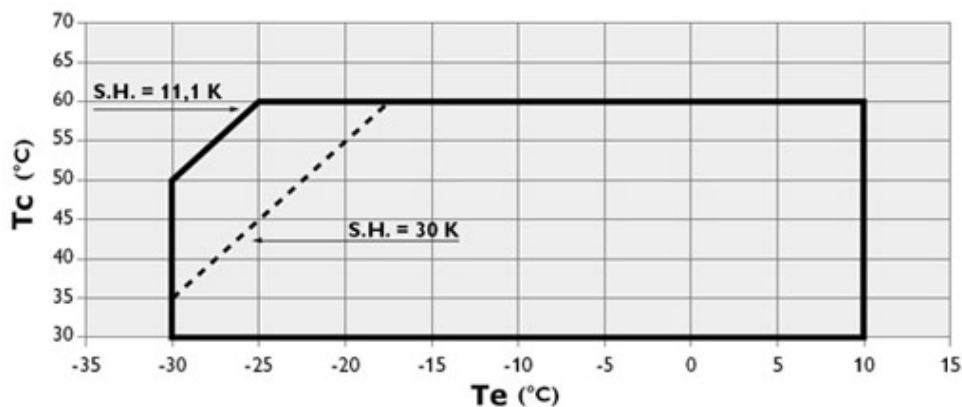

Model: MTZ40

Capacity

R407C

Cooling capacity [W]

$t_c \setminus t_e$	-15	-10	-5	0	5	10	15
35	4 283	5 574	7 096	8 876	10 939	13 312	16 019
40	3 928	5 152	6 585	8 252	10 179	12 392	14 916
45	3 557	4 719	6 067	7 625	9 420	11 477	13 822
50	-	4 271	5 537	6 991	8 658	10 564	12 734
55	-	-	4 992	6 345	7 889	9 647	11 647
60	-	-	-	5 683	7 108	8 723	10 556
65	-	-	-	5 001	6 310	7 787	9 458

Power input [W]

$t_c \setminus t_e$	-15	-10	-5	0	5	10	15
35	2 036	2 254	2 445	2 609	2 746	2 854	2 935
40	2 119	2 373	2 597	2 793	2 959	3 094	3 198
45	2 182	2 479	2 744	2 977	3 179	3 348	3 483
50	-	2 567	2 879	3 158	3 402	3 611	3 785
55	-	-	2 999	3 330	3 624	3 880	4 099
60	-	-	-	3 489	3 840	4 150	4 420
65	-	-	-	3 632	4 045	4 417	4 746

Current [A]

$t_c \setminus t_e$	-15	-10	-5	0	5	10	15
35	4.68	4.93	5.15	5.34	5.51	5.64	5.73
40	4.78	5.08	5.36	5.60	5.81	5.98	6.11
45	4.85	5.22	5.56	5.86	6.13	6.35	6.52
50	-	5.34	5.76	6.13	6.46	6.74	6.98
55	-	-	5.94	6.39	6.80	7.16	7.47
60	-	-	-	6.64	7.14	7.59	7.98
65	-	-	-	6.88	7.48	8.02	8.51

Model: MTZ40

Capacity

Mass flow [kg/s]

$t_c \setminus t_e$	-15	-10	-5	0	5	10	15
35	92.95	118.94	148.95	183.38	222.67	267.23	317.49
40	89.63	115.51	145.12	178.87	217.19	260.51	309.24
45	85.74	111.61	140.91	174.08	211.53	253.69	300.98
50	-	107.06	136.16	168.84	205.51	246.62	292.56
55	-	-	130.70	162.98	198.98	239.12	283.83
60	-	-	-	156.35	191.77	231.05	274.60
65	-	-	-	148.78	183.72	222.22	264.72

C.O.P. [W/W]

$t_c \setminus t_e$	-15	-10	-5	0	5	10	15
35	2.10	2.47	2.90	3.40	3.98	4.66	5.46
40	1.85	2.17	2.54	2.95	3.44	4.01	4.66
45	1.63	1.90	2.21	2.56	2.96	3.43	3.97
50	-	1.66	1.92	2.21	2.55	2.93	3.36
55	-	-	1.66	1.91	2.18	2.49	2.84
60	-	-	-	1.63	1.85	2.10	2.39
65	-	-	-	1.38	1.56	1.76	1.99

Operating conditions: suction superheat: 10 K, subcooling: 0 K

t_c - Condensing temperature [°C]

t_e - Evaporating temperature [°C]

Application range

