

Kuba DZA 45-G62

Specifications

Hersteller	Kuba
Typ	DZA 45-G62
Kälteleistung kW	36,5
Kältemittel	Glycol
Anzahl der Ventilatoren	2
Ventilator Durchmesser	5
in mm	
Abtauung	None
Beidseitig ausblasend	✓
Luftdurchsatz in m³/h	8100
Größe	2130x1600x430 mm (LxWxH)
Bemerkungen	Surface: 132 m2 / y.o.b. 2010
Volume	21 dm3
Gewicht	172 kg
Stock	1




Description

Used Kuba DZA 45-G62

Used and in excellent condition Kuba/GEA DZA 45-G62 evaporator with 2 fans, each fan has a diameter of 450 mm and the fanspace is 45 mm, 1330/970RPM, 0,64/0,43kW. This evaporator has 36,5 kW with an air temerapture of 16°C and coolwater temperature 4°C in and 8°C out. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.



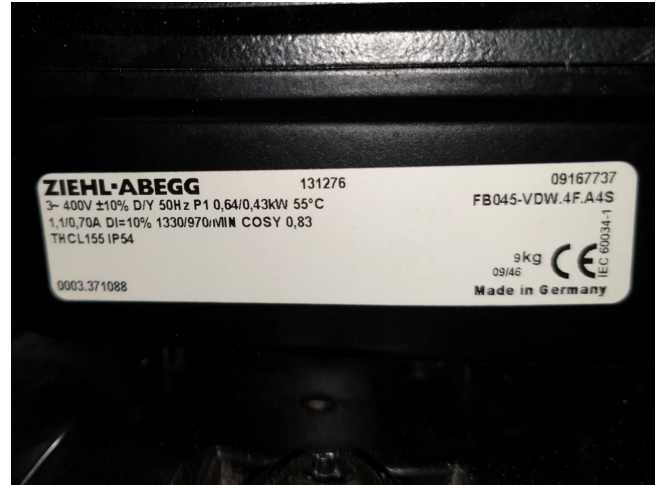

GEA
Küba
Kältetechnik

Technische Daten (Glycol, Sole, Wasser)
Technical Data (Glycol, Brine, Water)
Données techniques (Saumure, eau)

DZA-G

DZA(E)-G (FKW, CFC) Lamellenabstand / Fin spacing / Pas d'ailettes 4,5 mm

Typ Model Modèle	Leistung Q bei 50Hz Rating Q at 50Hz Puissance Q à 50Hz	Kühlfäche Sur- face	Luft- strom Air flow	Blatt- weite Air throw	Rohr- inhalt Tube volume	Anschlüsse Connections Raccords	Ventilatoren (Betriebswerte bei 50Hz) Fans (operating values at 50Hz) Ventilateurs (valeurs d'exploitation 50Hz)					
	$\dot{Q}_{11} = 16$ kWh h2O	AP Sur- face	Debit d'air	Project. de l'air	Volume des tub.	Eintritt Inlet Entrée	Austritt Outlet Sortie	St. PC Impeller Helix	Je Ventilator 400x10% V-3 50Hz Each fan 400x10% V-3 50Hz Par ventilateur 400x10% V-3 50Hz			
DZA(E)	[kW]	[m ²]	[m ³ /h]	[m]	[dm ³]	[Ø mm]	[Ø mm]	[Ø mm]	[min ⁻¹]	[W]	[A]	
40-G41	10,9	0,5	33	2890	2 x 9	5		1	400	1350/1050	320/230	0,66/0,38
40-G61	12,9	0,1	49	2720	2 x 9	8		1	400	1350/1050	320/230	0,66/0,38
45-G41	15,7	0,4	44	4400	2 x 11	7	Siehe Datenblatt Küba Select, da Anschlüsse auf die jeweiligen Betriebs- bedingungen angepasst werden.	1	450	1330/970	640/430	1,10/0,70
45-G61	19,4	0,4	66	4050	2 x 11	11		1	450	1330/970	640/430	1,10/0,70
50-G61	27,8	0,4	110	5400	2 x 14	17		1	500	1330/1030	820/550	1,50/0,70
50-G81	30,9	0,3	146	5175	2 x 14	23		1	500	1330/1030	820/550	1,50/0,70
56-G61	35,6	0,3	132	7245	2 x 16	21		1	560	1360/1090	840/640	1,65/1,05
56-G81	39,7	0,2	176	6975	2 x 16	28		1	560	1360/1090	840/640	1,65/1,05
40-G42	21,9	0,5	66	5780	2 x 12	11	bedingungen angepasst werden.	2	400	1350/1050	320/230	0,66/0,38
40-G62	26,7	0,3	99	5440	2 x 12	16		2	400	1350/1050	320/230	0,66/0,38
45-G42	31,4	0,4	88	8800	2 x 14	14		2	450	1330/970	640/430	1,10/0,70
45-G62	36,5	0,1	132	8100	2 x 14	21		2	450	1330/970	640/430	1,10/0,70
50-G62	55,4	0,4	220	10800	2 x 17	35		2	500	1330/1030	820/550	1,50/0,70
50-G82	62,0	0,3	293	10350	2 x 17	46	Please refer to the Data sheet in our Selection Software Küba Select, since connections have to be adjusted according to operation conditions.	2	500	1330/1030	820/550	1,50/0,70
56-G62	67,3	0,1	264	14490	2 x 19	41		2	560	1360/1090	840/640	1,65/1,05
56-G82	80,1	0,2	352	13950	2 x 19	55		2	560	1360/1090	840/640	1,65/1,05
40-G43	31,5	0,2	99	8670	2 x 15	16			3	400	1350/1050	320/230
40-G63	38,6	0,1	148	8160	2 x 15	25		3	400	1350/1050	320/230	0,66/0,38
45-G43	45,0	0,2	132	13200	2 x 17	22		3	450	1330/970	640/430	1,10/0,70
45-G63	58,3	0,4	198	12150	2 x 17	32		3	450	1330/970	640/430	1,10/0,70
50-G63	84,0	0,6	329	16200	2 x 20	52		3	500	1330/1030	820/550	1,50/0,70
50-G83	93,6	0,4	439	15525	2 x 20	70		3	500	1330/1030	820/550	1,50/0,70
56-G63	107,4	0,3	395	21735	2 x 22	62		3	560	1360/1090	840/640	1,65/1,05
56-G83	120,5	0,3	528	20925	2 x 22	83		3	560	1360/1090	840/640	1,65/1,05
40-G44	43,7	0,5	132	11560	2 x 18	22		4	400	1350/1050	320/230	0,66/0,38
40-G64	53,6	0,3	198	10880	2 x 18	33		4	400	1350/1050	320/230	0,66/0,38
45-G44	62,9	0,4	176	17600	2 x 20	29	Pour le Ø des connections se référer au Logiciel de Selection.	4	450	1330/970	640/430	1,10/0,70
45-G64	76,3	0,3	264	16200	2 x 20	42		4	450	1330/970	640/430	1,10/0,70
50-G64	110,9	0,4	439	21600	2 x 23	70		4	500	1330/1030	820/550	1,50/0,70
50-G84	124,2	0,3	586	20700	2 x 23	93		4	500	1330/1030	820/550	1,50/0,70
56-G64	146,6	0,8	527	28880	2 x 25	82		4	560	1360/1090	840/640	1,65/1,05
56-G84	165,6	0,6	704	27900	2 x 25	110		4	560	1360/1090	840/640	1,65/1,05