


Bock HGX5/945-4 S cool/freeze package

Specifications




Hersteller	Bock
Typ	HGX5/945-4 S cool/freeze package
Kältemittel	Freon
kW at 0°C/+40°C	65.30
kW at -5°C/+40°C	54.20
kW at -10°C/+40°C	44.50
kW at -20°C/+40°C	28.70
kW at -30°C/+40°C	17.10
Auf einem Stahlrahmen	✓
Druckschalter	✓
Druckmanometer	✓
Flüssigkeitssammler	✓
Flüssigkeitssammler	30
Inhalt ltr.	
Ölabscheider	✓
Schauglass	✓
Bemerkungen	Our capacity table is based on Manufacturer spec. We would like to know which refrigerant is in your system
Package / Rack	✓
Stock	1

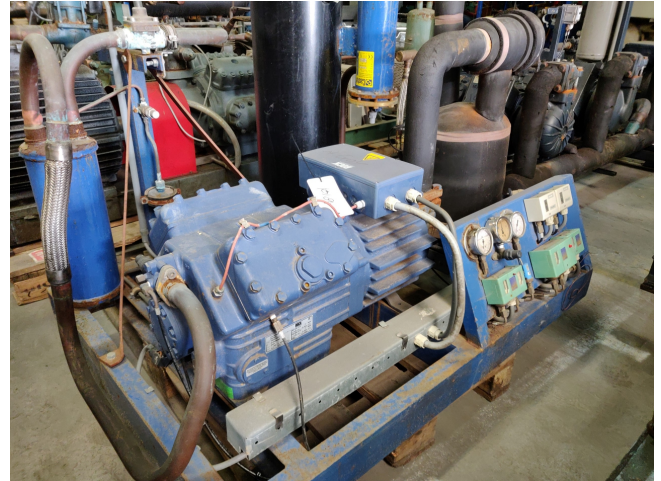

Description

Used Bock HGX5/945-4 S cool/freeze package

Gebrauchter Bock Hubkolbenverdichter HGX5/945-4 S bestehend aus folgenden Elementen: Ölabscheider, Druckschalter, Manometer, Flüssigkeitssammler und ein Schauglas.
 * Warum für HOSBV wählen? Wir waren nicht nur der größte Spezialist für gebrauchte Kältetechnik in Europa, sondern liefern auch alle Geräte einschließlich umfassender Tests, Garantien und industrieller Reinigung. Optional können wir die Logistik arrangieren.

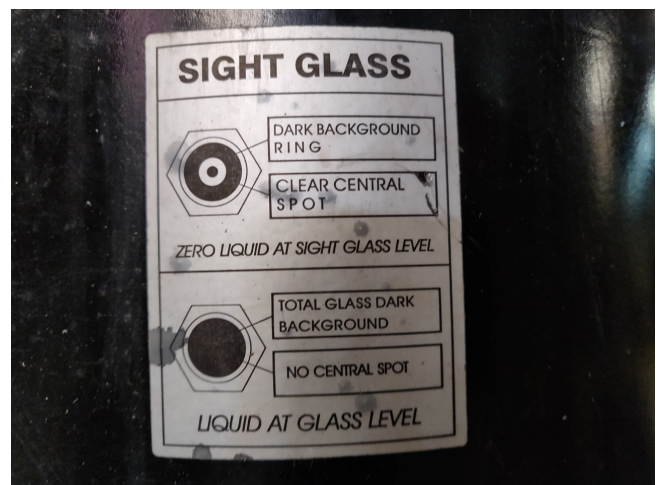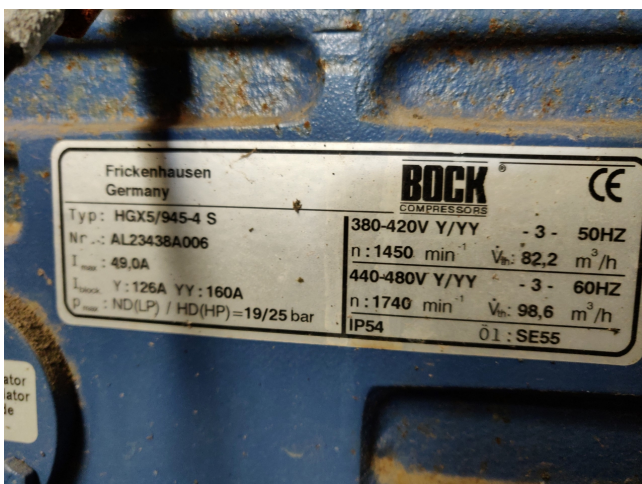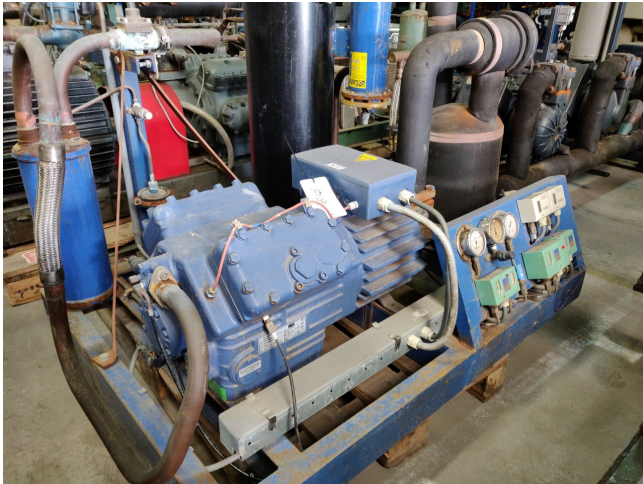

HGX5/945-4 S

Engine: 380-420V YYY -3- 50Hz PW
Refrigerant: R404A, R507

GEA Commercial Compressors



Subject:

Performance data table

Application: Refrigeration & AC
Reference temperature: Dew point
Supply frequency: 50 Hz
Voltage: 400 V
Suction gas temperature: 20 °C
Subcooling (outside cond.): 0 K

tc [°C]		to [°C]									
		10.0	5.0	0.0	-5.0	-10.0	-15.0	-20.0	-25.0	-30.0	
30.0	Q [W]		92000	77300	64400	53000	43100	34500	27200	20900	
	P [kW]		18.30	17.70	16.90	16.00	14.90	13.60	12.30	10.80	
	I [A]		31.70	30.80	29.60	28.20	26.60	24.90	23.10	21.40	
35.0	Q [W]		85000	71300	59300	48700	39600	31600	24800	19100	
	P [kW]		20.00	19.10	18.10	17.00	15.70	14.20	12.70	11.10	
	I [A]		34.30	33.00	31.50	29.70	27.80	25.80	23.70	21.70	
40.0	Q [W]		77900	65300	54200	44500	36000	28700	22500	17100	
	P [kW]		21.70	20.60	19.40	18.00	16.50	14.80	13.10	11.30	
	I [A]		37.10	35.40	33.40	31.20	28.90	26.60	24.20	21.90	
45.0	Q [W]		70900	59200	49000	40100	32500	25800	20100	15200	
	P [kW]		23.40	22.00	20.60	18.90	17.20	15.30	13.40	11.40	
	I [A]		39.90	37.70	35.30	32.70	30.00	27.30	24.60	22.00	
50.0	Q [W]		63700	53100	43900	35800	28900	22900	17700	13200	
	P [kW]		25.00	23.40	21.70	19.80	17.80	15.70	13.50	11.30	
	I [A]		42.80	40.10	37.20	34.10	31.00	27.90	24.80	22.00	
55.0	Q [W]		56500	47000	38700	31500	25200	19900	15200	11200	
	P [kW]		26.70	24.80	22.80	20.60	18.40	16.00	13.60	11.10	
	I [A]		45.60	42.40	38.90	35.40	31.80	28.30	24.90	21.80	