


Sabroe CMO 28

Specifications



Hersteller	Sabroe
Typ	CMO 28
Kältemittel	NH 3 / Freon
Refrigerant type	R22 or other types
kW at +10°C/+40°C	233
kW at 0°C/+40°C	152
kW at -5°C/+40°C	120
kW at -10°C/+40°C	93
kW at -20°C/+40°C	52
kW at -30°C/+40°C	25
E-Motor Specs	37kW at 1460RPM
Auf einem Stahlrahmen	✓
Druckschalter	✓
Druckmanometer	✓
Ölniveauregelung AC&R	✓
Bemerkungen	capacity based on NH3
Bemerkungen	R22 or other freon types
Größe	1680x750x920 mm (LxWxH)
Stock	1

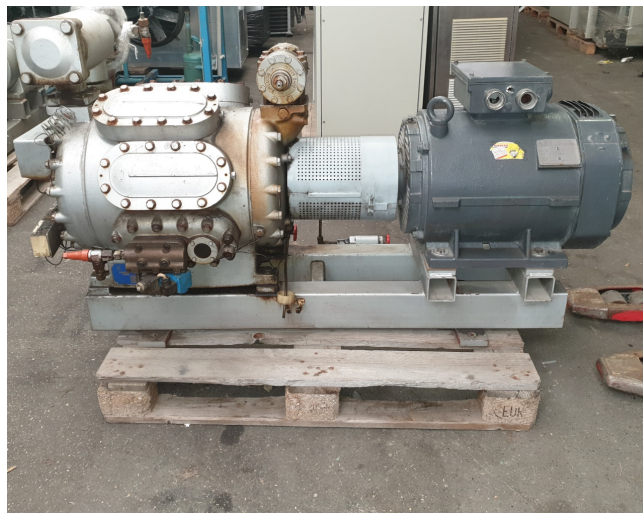

Description

Used Sabroe CMO 28

Used Sabroe CMO 28 single-stage reciprocating compressor with electro motor build by AEG with 37kW and 1460RPM at 50 *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also arrange the logistics.

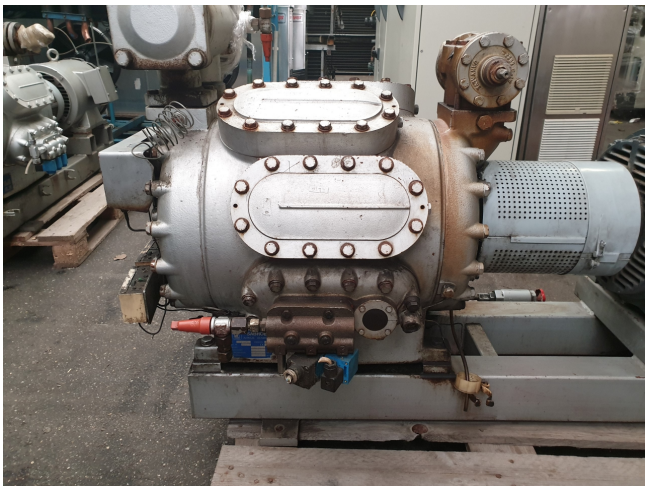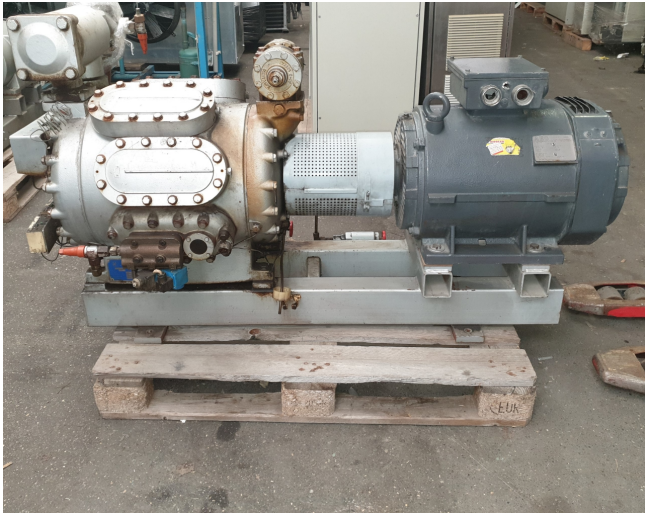



garage

Model	Number of cylinders	Swept volume at 1500 rpm	Swept volume at 1800 rpm	Nominal capacities in kW at 1500 rpm				Dimensions in mm			Weight excluding motor	Sound pressure level at 1500 rpm dB(A)
				R212				R40AA				
				Single/high stage	Booster	Single/high stage	Booster	L	W	H		
				-100/+35°C	-10/+35°C	-100/+35°C	-10/+35°C				kg	
CMO 24	4	97	116	53	85	54	85	1400-2150	800	900	480	69
CMO 26	6	146	175	79	127	71	127	1450-2175	800	900	520	71
CMO 28	8	194	233	105	170	98	170	1475-2200	800	900	550	72
CMO 34	4	113	136	62	100	57	99	1400-2150	800	900	480	70
CMO 36	6	170	204	93	149	85	149	1450-2175	800	900	520	72
CMO 38	8	228	273	123	199	113	198	1475-2200	800	900	550	73

Nominal capacities are based on 1500 rpm and 5K liquid subcooling.
All refrigerants make it possible to operate CMO compressors

01/2015