

Güntner GVH 080.2A/2x4-S(S)

Specifications

Brand	Güntner
Type	GVH 080.2A/2x4-S(S)
Product type	Air Cooled Condenser
kW	307
Number of Fans	8
RPM of the Fans	440/340
Refrigerant	Freon
Air Flow in m ³ /h	76.000
diameter fans Ø	800 mm
Surface (m ²)	1.335
Tube volume	178 dm ³
Sizes	8500x2300x1850 mm (LxWxH)
Weight	1.383 kg
Remarks	y.o.b. 2006
Stock	1






Description

Used Güntner GVH 080.2A/2x4-S(S)

Used Guntner GVH 080.2A/2x4-S(S) air cooled condensor super low noise level design. Complete with 8 Ziehl-Abegg fans 50 Hz - 0,19/0,09 kW - 440/340 RPM - diameter 800 mm. Mentioned capacity at delta, capacity at star 256 kw and 59.200 m3/h.

*All components of this used condensers will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.

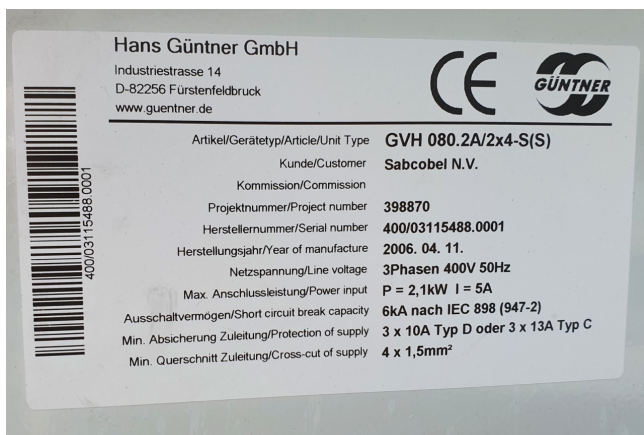

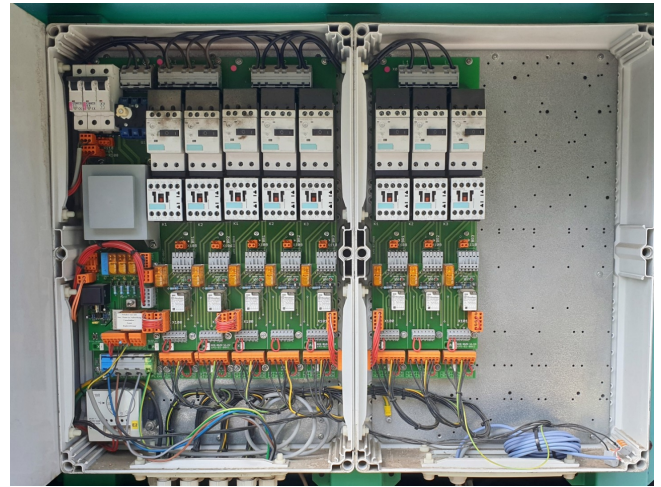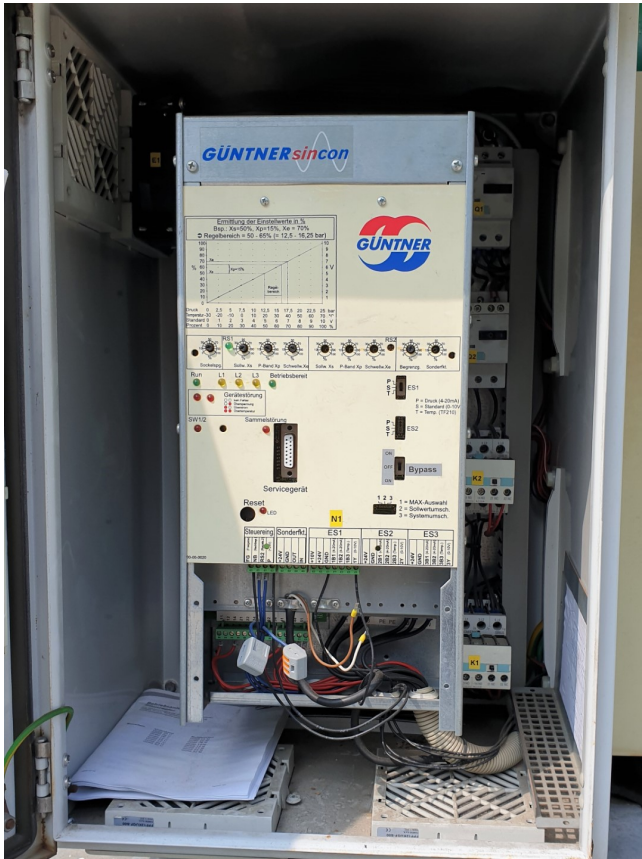

Leistungstabellen für Temperaturbedingungen nach Eurovent

Gewichte und Maße

Capacity tables for temperature conditions acc. to Eurovent

Weights and Measures

GVH/V- 2 reihig - 2 rows															
Typ	Q ₀ Nennleistung Nominal capacity		V ₀ Luftvolumenstrom Air volume flow		P ₀ aufgenommene ol. Leistung consumed power		E ₀ Energieeffizienzklasse Energy efficiency class		Schalldruck- pegel Sound pressure level		Strang- Anzahl Number of passes	Gewicht Weight	Rohr- volumen tube volume	Fläche Surface	
	R404A Δt = 15 K														
	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y					
	kW	kW	m ³ /h	m ³ /h	kW	kW	A	A	dB(A)	10m	kg	l	m ²		
080.3A/2x2	151	126	38000	29600	1,2	0,7	A	A	38	32	30	768	91	668	
080.3B/2x2	166	138	40000	31200	1,2	0,7	A	A	38	32	30	874	108	808	
080.3A/2x3	229	190	57000	44400	1,9	1,1	A	A	39	33	45	1055	134	1002	
080.3B/2x3	252	208	60000	46800	1,9	1,1	A	A	39	33	45	1201	159	1212	
080.3A/2x4	307	256	76000	59200	2,5	1,5	A	A	41	35	90	1383	178	1338	
080.3B/2x4	334	276	80000	62400	2,5	1,5	A	A	40	34	90	1583	211	1617	
080.3A/2x5	384	318	95000	74000	3,1	1,9	A	A	41	35	90	1729	218	1669	
080.3B/2x5	423	348	100000	78000	3,1	1,9	A	A	41	35	90	1997	259	2021	
080.3A/2x6	466	385	114000	88800	3,7	2,2	A	A	42	36	90	2066	263	2003	
090.2A/2x2	206	172	59200	45600	2,8	1,8	B	B	47	41	30	794	91	668	
090.2B/2x2	234	197	64800	50400	2,8	1,8	B	B	47	41	30	899	111	808	
090.2A/2x3	314	261	88800	68400	4,2	2,7	B	B	48	42	45	1092	134	1002	
090.2B/2x3	355	298	97200	75600	4,2	2,6	B	B	48	42	45	1239	164	1212	
090.2A/2x4	417	346	118400	91200	5,6	3,5	B	B	50	44	90	1434	178	1338	
090.2B/2x4	477	397	129600	100800	5,6	3,5	B	B	49	43	90	1634	218	1617	
090.2A/2x5	530	439	148000	114000	7,0	4,4	B	B	50	44	90	1792	224	1669	
090.2B/2x5	601	502	162000	126000	7,0	4,4	B	B	50	44	90	2060	265	2003	
090.2A/2x6	640	531	177600	136800	8,4	5,3	B	B	51	45	90	2142	257	2003	