

Güntner S-GGHN 071.2F/17-AND50/12P.E

Specifications


Brand	Güntner
Type	S-GGHN 071.2F/17-AND50/12P.E
kW	34,8
Refrigerant	Glycol
Number of Fans	1
Fin Space in mm	7
Defrosting	None
m³/h	11.890
Sizes	2130x1000x980 mm (LxWxH)
Remarks	Y.o.b. 2009
Volume	28,7 dm³
Weight	220 kg
Stock	2




Description

Used Güntner S-GGHN 071.2F/17-AND50/12P.E

Used and in good condition Güntner S-GGHN 071.2F/17-AND50/12P.E evaporator. Complete with 2 Zielh-Abegg fans 50 Hz - 0,68/0,31 kW - 900/690 RPM - diameter 710 mm. *All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

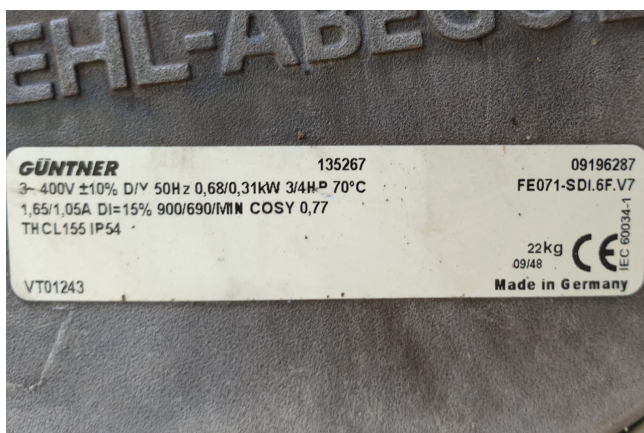

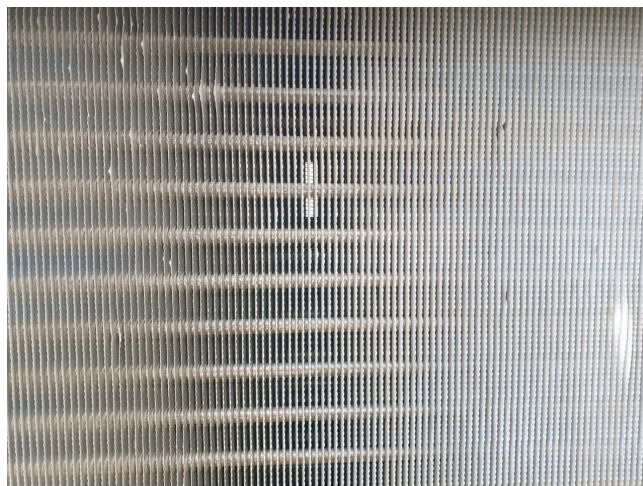



GGHN - 1 Ventilator - 1 Fan																					
Typ	Type	$t_f = -3\text{ }^{\circ}\text{C}$; $d_p = 0.8\text{ bar}$; Glykol 25%; $t_a = 10\text{ }^{\circ}\text{C}$ bei 85% r.F. f.																			
		Leistung Capacity	Volumenstrom Volume flow rate	Schleuszeit Brine outlet	Fläche Surface	Luftvolumenstrom Air volume flow	Wirkweite ohne Streamer Air throw without Streamer	Wirkweite mit Streamer Air throw with Streamer	Schalldruck Sound pressure	Anschlüsse Connections	El. Abtauheizung El. defrost										
		kW	m³/h	°C	m²	m³/h	m	m	dB(A)/3m	Kälteflüssigkeit / Sole Coolant / Brine	400 V										
040.2D/14-ANW50		8,6	2,2	0,5	32,7	3060	11	24	52	28,0	28,0	1620	700	2,32	1 x A	0,22	1 x E				
040.2F/14-ANW50		11,5	3,3	0,1	49,0	2810	10	23	52	35,0	35,0	2700	1000	3,70	1 x B	0,22	1 x E				
045.2D/14-ANW50		11,5	1,8	2,8	51,3	5110	15	33	56	28,0	28,0	2580	1200	3,78	1 x B	0,51	1 x E				
045.2E/14-ANW50		15,1	3,0	1,6	64,2	4860	14	32	56	35,0	35,0	3440	1200	4,64	1 x B	0,51	1 x E				
050.2D/14-AN50		18,0	4,6	0,6	67,3	6650	19	38	56	35,0	35,0	3000	1300	4,30	1 x B	0,52	1 x I				
050.2E/14-AN50		21,6	5,7	0,4	84,1	6470	19	36	56	42,0	42,0	3750	1300	5,05	1 x B	0,53	1 x I				
050.2F/14-AN50		21,5	3,8	2,1	100,9	6300	18	34	56	35,0	35,0	4500	1950	6,45	1 x B	0,54	1 x I				
071.2D/14-AND50		30,4	6,5	1,3	117,6	11760	32	57	55	42,0	42,0	6250	2700	8,95	1 x C	0,80	1 x G				
071.2E/14-AND50		38,3	10,6	0,3	147,0	11230	32	56	55	54,0	54,0	7500	2700	10,20	1 x C	0,81	1 x G				
071.2F/14-AND50		35,4	5,2	3,2	176,4	10790	31	54	55	42,0	42,0	8750	2700	11,45	1 x C	0,82	1 x G				
080.2D/14-AND50		44,6	8,0	2,1	184,5	17970	39	68	63	54,0	54,0	9000	3450	12,45	1 x C	1,35	1 x G				
080.2E/14-AND50		53,8	10,0	1,9	230,7	17280	38	66	63	54,0	54,0	12000	3450	15,45	2 x C	1,36	1 x G				
080.2F/14-AND50		61,4	12,0	1,6	276,8	16720	37	64	63	64,0	64,0	13500	3450	16,95	2 x C	1,36	1 x G				
040.2F/17-ANW50		8,7	1,8	1,4	28,8	3100	12	24	52	28,0	28,0	2700	1000	3,70	1 x B	0,22	1 x E				
040.2H/17-ANW50		11,1	2,9	0,5	38,4	2930	11	23	52	35,0	35,0	3240	1000	4,24	1 x B	0,22	1 x E				
045.2E/17-ANW50		12,5	3,0	0,8	37,7	5320	15	36	56	35,0	35,0	3440	1200	4,64	1 x B	0,49	1 x E				
045.2F/17-ANW50		13,5	2,7	1,6	45,3	5190	14	35	56	35,0	35,0	4300	1800	6,10	1 x B	0,50	1 x E				
045.2H/17-ANW50		17,2	3,6	1,3	60,4	4840	14	33	56	35,0	35,0	6020	1800	7,82	1 x B	0,51	1 x E				
050.2F/17-AN50		18,0	3,8	1,3	59,4	6700	20	38	56	35,0	35,0	4500	1950	6,45	1 x B	0,51	1 x I				
050.2H/17-AN50		22,2	4,5	1,5	79,1	6420	19	36	56	42,0	42,0	6750	1950	8,70	1 x B	0,53	1 x I				
071.2E/17-AND50		25,8	4,3	2,4	86,5	12200	32	58	55	42,0	42,0	7500	2700	10,20	1 x C	0,78	1 x G				
071.2F/17-AND50		34,8	9,7	0,3	103,8	11890	32	57	55	54,0	54,0	8750	2700	11,45	1 x C	0,80	1 x G				
071.2H/17-AND50		39,8	8,3	1,3	138,4	11190	32	54	55	54,0	54,0	11250	2700	13,95	1 x C	0,81	1 x G				
080.2E/17-AND50		44,1	10,0	1,0	135,7	18520	40	69	63	54,0	54,0	12000	3450	15,45	2 x C	1,33	1 x G				
080.2F/17-AND50		51,8	12,0	0,9	162,8	18170	39	68	63	64,0	64,0	13500	3450	16,95	2 x C	1,34	1 x G				