

Güntner S-GVH 080.1D/1-L(S)

Specifications

Brand	Güntner
Type	S-GVH 080.1D/1-L(S)
Product type	Air Cooled Condenser
kW	77,1
Number of Fans	1
RPM of the Fans	670/510
Refrigerant	Freon
Air Flow in m ³ /h	16.000
diameter fans Ø	800 mm
Surface (m ²)	404 m ²
Tube volume	51,4 dm ³
Sizes	2700x1540x1500 mm (LxWxH)
Weight	412 kg
Remarks	Y.o.b. 2004
Stock	1




Description

Used Güntner S-GVH 080.1D/1-L(S)

Used Güntner S-GVH 080.1D/1-L(S) air cooled condensor extra silence. Complete with 1 Güntner fan 50 Hz - 1,05/0,77 kW - 670/510 RPM - diameter 800 mm - maximum working temperature 55 °C. Mentioned capacity at delta.

*All components of this used condensor will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.



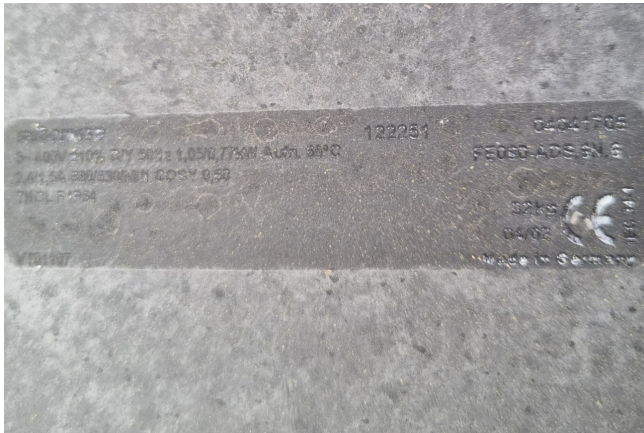

nach Eurovent

Gewichte und Maße

acc. to Eurovent

Weights and Measures

GVH/V .../...L... - 1 reihig - 1 row													
Typ Type	Q _{ev} Nominal capacity R404A Δt = 15 K		V _i Luftvolumenstrom Air volume flow		aufgenommene el. Leistung consumed power P _e total		Energieeffizienzklasse Energy efficiency class Δ / Y	Schalldruck- pegel Sound pressure level		Strang- Anzahl Number of passes	Gewicht Weight	Rohr- volumen Tube volume	Fläche Surface
	Δ	Y	Δ	Y	Δ	Y		Δ	Y				
	kW	kW	m³/h	m³/h	kW	kW		dB(A)10m			kg	l	m²
080.3A/1	61.1	49.9	13800	10600	0.8	0.5	B / B	41	35	11	314	33	245
080.3B/1	67.7	55.7	14800	11500	0.8	0.5	B / A	41	35	11	352	39	296
080.3A/2	123	99.8	27600	21200	1.6	1.0	B / B	44	38	22	526	65	490
080.3B/2	136	111	29600	23000	1.5	1.0	B / A	44	38	22	603	77	593
080.3A/3	186	151	41400	31800	2.3	1.5	B / B	46	40	33	711	95	735
080.3B/3	206	168	44400	34500	2.3	1.5	B / A	46	40	33	819	113	889
080.3A/4	249	203	55200	42400	3.1	2.0	B / B	47	41	33	939	125	979
080.3B/4	274	223	58200	46000	3.1	2.0	B / A	46	40	66	1088	151	1186
080.3A/5	312	253	69000	53000	3.9	2.5	B / B	47	41	66	1182	155	1224
080.3B/5	346	282	74000	57500	3.9	2.5	B / A	47	41	66	1379	186	1482
080.3A/6	377	306	82800	63600	4.7	2.9	B / B	48	42	66	1409	187	1469
080.3C/1	71.2	58.3	15300	11900	0.8	0.5	B / A	41	35	15	365	47	334
080.3D/1	77.1	63.1	16000	12500	0.8	0.5	B / A	41	35	15	412	55	404
080.3C/2	142	117	30600	23800	1.5	1.0	B / A	44	38	30	619	88	668
080.3D/2	154	125	32000	25000	1.5	1.0	B / A	44	38	30	712	105	808
080.3C/3	216	176	45900	35700	2.3	1.4	B / A	46	40	45	848	130	1002
080.3D/3	233	190	48000	37500	2.3	1.4	B / A	45	39	45	981	155	1212
080.3C/4	289	236	61200	47600	3.0	1.9	B / A	47	41	45	1123	172	1335
080.3D/4	312	254	64000	50000	3.0	1.9	B / A	46	40	45	1302	206	1617
080.3C/5	361	293	76500	59500	3.8	2.4	B / A	47	41	90	1409	215	1669
080.3D/5	391	317	80000	62500	3.8	2.4	B / A	47	41	90	1650	257	2021
080.3C/6	436	355	91800	71400	4.6	2.9	B / A	48	42	90	1685	255	2003