

Güntner GVH 090.2A/2x3-E(D)

Specifications



Brand	Güntner
Type	GVH 090.2A/2x3-E(D)
Product type	Air Cooled Condenser
kW	283,0
Number of Fans	6
RPM of the Fans	390/250
Refrigerant	Freon
Air Flow in m ³ /h	76.200
diameter fans Ø	900 mm
Surface (m ²)	1002 m ²
Tube volume	134 dm ³
Sizes	6200x2280x1900 mm (LxWxH)
Weight	1092 kg
Remarks	Y.o.b. 2010
Stock	1



Description

Used Güntner GVH 090.2A/2x3-E(D)

Used Güntner GVH 090.2A/2x3-E(D) air cooled condensor. Complete with 6 Ziehl-Abegg fans 50 Hz - 0,30/0,08 kW - 390/250 RPM - diameter 900 mm. Mentioned capacity at delta is 283 kW and capacity at star is 196 kW. *All components of this used condensor will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.

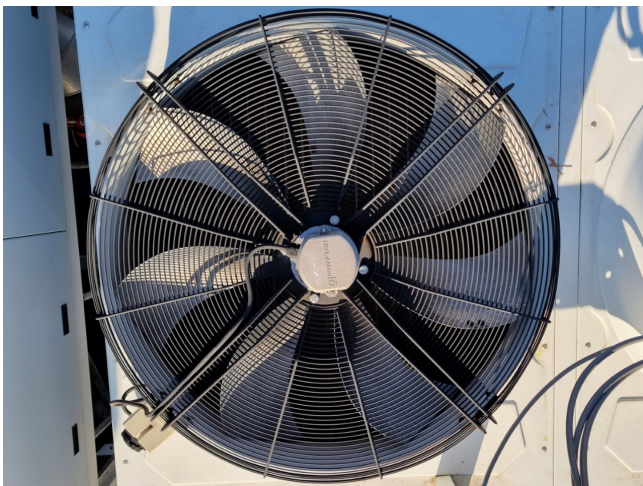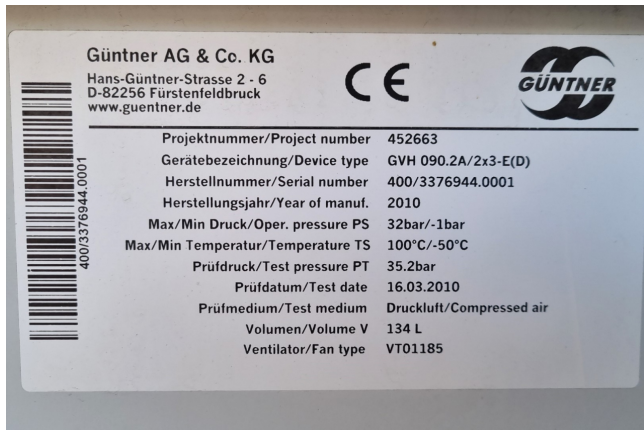

Typ	Nennleistung		Luftvolumenstrom		el. Leistung		Energieeffizienz		Schallleistungspegel		Strang-Anzahl	Gewicht	Rohr-volumen	Fläche
Type	Nominal capacity		Air volume flow		consumed power		Energy efficiency		Sound pressure level		Number of passes	Weight	Tube volume	Surface
	R404A $\Delta t = 15\text{ K}$				P_e total									
	Δ	Υ	Δ	Υ	Δ	Υ	Δ / Υ		Δ	Υ				
	kW	kW	m³/h	m³/h	kW	kW			dB(A)10m			kg	l	m²
080.3A/2x2	141	104	34400	23000	0.9	0.5	A / A	35	25	30	768	91	668	
080.3B/2x2	155	115	36400	24600	0.9	0.5	A / A	35	25	30	874	108	808	
080.3A/2x3	212	156	51600	34500	1.4	0.7	A / A	36	26	45	1055	134	1002	
080.3B/2x3	234	173	54600	36900	1.4	0.7	A / A	36	26	45	1201	159	1212	
080.3A/2x4	286	210	68800	46000	1.9	0.9	A / A	38	28	45	1383	178	1335	
080.3B/2x4	313	232	72800	49200	1.9	0.9	A / A	37	27	45	1583	211	1617	
080.3A/2x5	357	261	86000	57500	2.4	1.2	A / A	38	28	90	1729	218	1669	
080.3B/2x5	393	288	91000	61500	2.4	1.2	A / A	38	28	90	1997	259	2021	
080.3A/2x6	431	316	103200	69000	2.8	1.4	A / A	39	29	90	2066	263	2003	
090.2A/2x2	186	130	50800	30800	2.2	1.1	B / A	43	33	30	794	91	668	
090.2B/2x2	211	150	55600	34800	2.2	1.1	B / A	43	33	30	899	111	808	
090.2A/2x3	283	196	76200	46200	3.3	1.7	B / A	44	34	45	1092	134	1002	
090.2B/2x3	320	227	83400	52200	3.3	1.7	B / A	44	34	45	1239	164	1212	
090.2A/2x4	377	263	101600	61600	4.4	2.2	B / A	46	36	45	1434	178	1335	
090.2B/2x4	427	300	111200	69600	4.4	2.2	B / A	45	35	90	1634	218	1617	
090.2A/2x5	475	328	127000	77000	5.5	2.8	B / A	46	36	90	1792	224	1669	
090.2B/2x5	539	380	139000	87000	5.5	2.8	B / A	46	36	90	2060	265	2021	
090.2A/2x6	574	397	152400	92400	6.6	3.3	B / A	47	37	90	2142	257	2003	
100.2A/2x2	201	145	57000	36000	2.7	1.4	B / B	45	36	30	768	91	668	
100.2B/2x2	232	169	64000	41000	2.7	1.4	B / A	45	36	30	874	111	808	
100.2A/2x3	306	220	85500	54000	4	2	B / B	46	37	45	1055	139	1002	
100.2B/2x3	352	256	96000	61500	4	2	B / A	46	37	45	1201	164	1212	
100.2A/2x4	406	291	114000	72000	5.4	2.7	B / B	48	39	90	1383	178	1335	
100.2B/2x4	473	341	128000	82000	5.4	2.7	B / A	47	38	90	1583	218	1617	
100.2A/2x5	516	369	142500	90000	6.7	3.4	B / B	48	39	90	1729	224	1669	
100.2B/2x5	596	431	166000	102500	6.7	3.4	B / A	48	39	90	1997	259	2021	
100.2A/2x6	624	447	171000	108000	8	4.1	B / B	49	40	90	2066	257	2003	