

# Bitzer 4G-20.2Y-40P (x2) & 4H-25.2Y-40P (x1)

#### **Specifications**

Brand	Bitzer
Туре	4G-20.2Y-40P (x2) &
	4H-25.2Y-40P (x1)
Refrigerant	Freon
kW at -5ºC/+40ºC	163,7
kW at -10ºC/+40ºC	135,1
kW at -20ºC/+40ºC	88,8
kW at -30ºC/+40ºC	54,4
kW at -40ºC/+40ºC	29,4
On steel base frame	1
Pressure gauges	1
Hp/Lp/Op	
Oil separator	1
Oil level system AC&R	1
Sight Glass	1
m3 / h	242,6
Remarks	Y.O.B. 2008
Package / Rack	✓
Sizes	2210x110x1430 mm
	(LxWxH)
Stock	1



#### Description

#### Used Bitzer 4G-20.2Y-40P (x2) & 4H-25.2Y-40P (x1)

Used Semi-hermetic reciprocating Bitzer 4G-20.2Y-40P compressor package with (2x) Bitzer 4G-20.2Y-40P and (1x) Bitzer 4H-25.2Y-40P. Complete with a Oil separator / Oil level system / Oil receiver / Control panel. \*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. \*If requested we are happy to arrange your logistics.









Typ 4G-20.2Y-40P SNr. 1674907019							
BITZER KÜH	Made in		UGMBH				
Nennspannung V 3Ph~	Frequ. Hz	Betr.strom A (max.)	Anlaufstro A (Y)	A (YY)	Fördervol m <sup>3</sup> /h	Drehzahl min <sup>-1</sup>	
380-420	50	37	97	158	84,6	1450	
440-480	60	37	97	158	102,1	1750	
440-480				158	102,1	1750	




























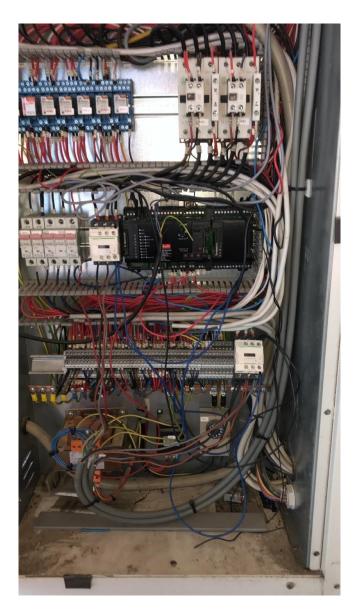

www.hosbv.com