

Güntner S-CXGHN 080.2H/310-END50.E

Specifications


Brand	Güntner
Type	S-CXGHN 080.2H/310-END50.E
kW	121,8
Refrigerant	CO2
Number of Fans	3
Fin Space in mm	10
Defrosting	Electric
m³/h	53.910
Sizes	5500x2450x1640 mm (LxWxH)
Remarks	Y.o.b. 2011
Volume	163,1 dm³
Weight	751 kg
Stock	1





Description

Used Güntner S-CXGHN 080.2H/310-END50.E

Used Guntner S-CXGHN 080.2H/310-END50.E CO2 cooler with electric defrosting in the diptray. Complete with 3 Ziehl-Abegg fans 50 Hz - 1,03/0,40 kW - 890/650 RPM - diameter 800 mm. Fan blows at 45° downblow and has an inlet hood.
*All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.

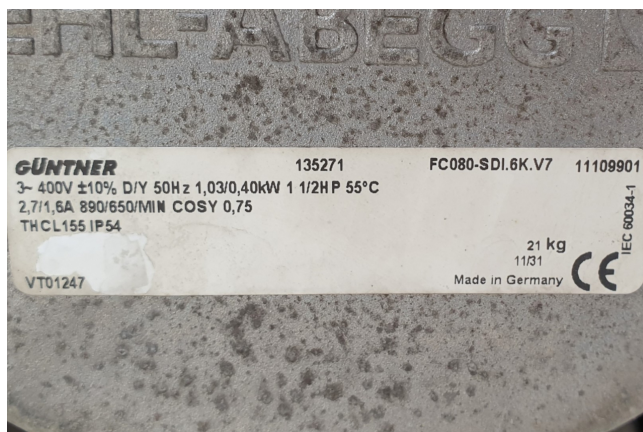

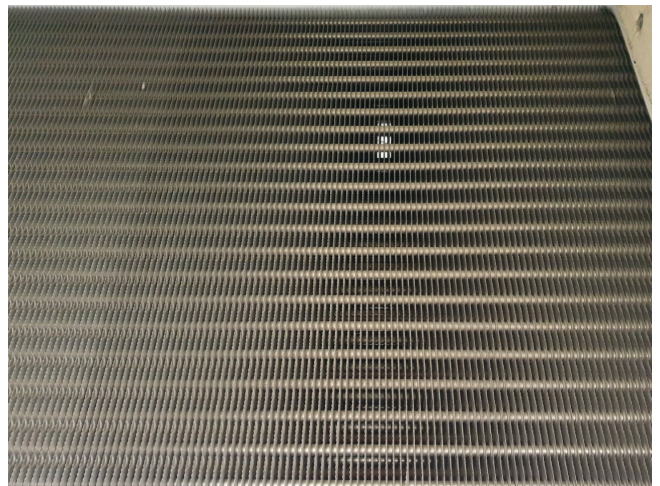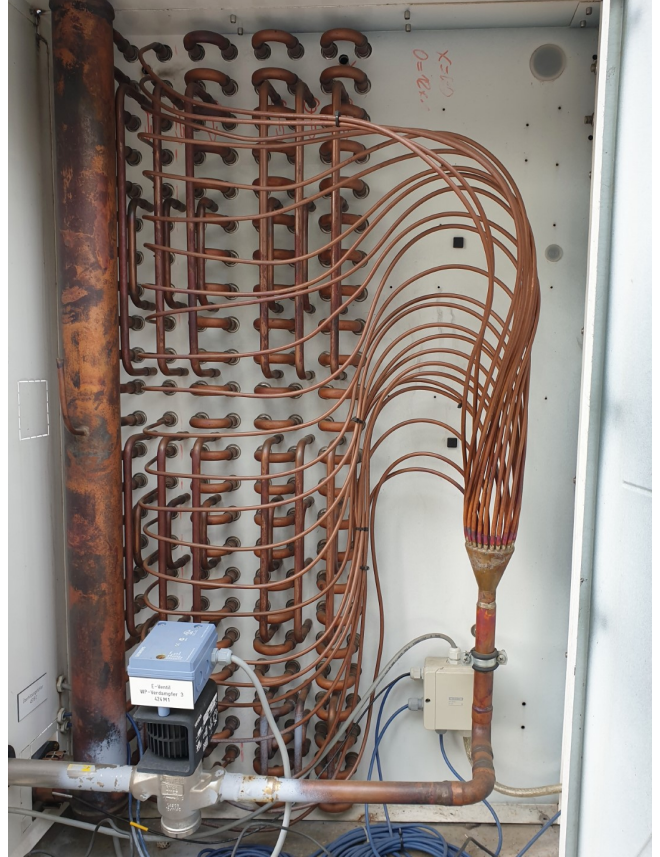



		CXGHN - 3 Ventilatoren - 3 Fans																			
Typ	Type	Leistung Capacity		CO ₂ CO ₂		Fläche Surface		Luftvolumenstrom Air volume flow		Wurfweite ohne Streamer Air throw without Streamer		Wurfweite mit Streamer Air throw with Streamer		Schalldruck Sound pressure		Anschlüsse Connections		Einsatzgebiet 1 / Range 1: t _a = -40 °C El. Abtauheizung El. defrost Kältemittel Refrigerant		Einsatzgebiet 2 / Range 2: t _a = -40 °C bis -50 °C El. Abtauheizung verstärkte Ausführung El. defrost (erfordert) 400 V	
		kW	m ²	m ³ /h	m	m	m	m	m	m	m	m	m	mm Ø	mm Ø	W	W	W	W	W	W
040.2F/37-ANW50		20,1	86,5	9300	14	29	57	16"	22	8000	2400	10,40	1 x B	9600	2400	12,00	1 x B	9600	2400	12,00	1 x B
040.2H/37-ANW50		24,2	115,3	8790	13	28	57	16"	28	9600	2400	12,00	1 x B	12800	2400	15,20	1 x B	9600	2400	15,20	1 x B
045.2E/37-ANW50		29,3	113,2	15960	18	41	60	16"	28	9200	3000	12,20	1 x B	13800	3000	16,80	2 x B	16100	4500	20,60	2 x B
045.2F/37-ANW50		33,8	135,8	15570	17	40	60	16"	35	11500	4500	16,00	2 x B	16100	4500	20,60	2 x B	16100	4500	20,60	2 x B
045.2H/37-ANW50		40,2	181,1	14520	17	38	60	22"	42	16100	4500	20,60	2 x B	20700	4500	25,20	2 x B	16100	4500	25,20	2 x B
050.2F/37-ANW50		43,4	178,1	20100	23	43	60	22"	35	14400	4800	19,20	2 x B	19200	4800	24,00	2 x B	16100	4500	25,20	2 x B
050.2H/37-ANW50		50,1	237,4	19260	22	41	60	22"	35	21600	4800	26,40	2 x B	28800	4800	33,60	3 x B	16100	4500	25,20	2 x B
071.2E/37-ANW50		66,4	259,5	36600	37	68	58	22"	42	22800	6300	29,10	3 x C	30400	6300	36,70	4 x C	16100	4500	25,20	2 x B
071.2F/37-ANW50		76,1	311,4	35670	37	67	58	22"	54	26500	6300	32,90	3 x C	34200	6300	40,50	4 x C	16100	4500	25,20	2 x B
071.2H/37-ANW50		87,2	415,2	33570	37	64	58	22"	42	34500	6300	40,50	4 x C	45600	6300	51,90	5 x C	16100	4500	25,20	2 x B
080.2E/37-ANW50		104,4	407,0	55560	46	79	67	28"	64	36000	8700	44,70	4 x C	49500	8700	58,20	5 x C	16100	4500	25,20	2 x B
080.2F/37-ANW50		117,4	488,4	54510	45	78	67	28"	64	40500	8700	49,20	4 x C	54000	8700	62,70	5 x C	16100	4500	25,20	2 x B
080.2H/37-ANW50		141,4	651,2	51630	44	76	67	28"	64	54000	8700	62,70	5 x C	72000	8700	80,70	7 x C	16100	4500	25,20	2 x B
040.2H/310-ANW50		16,8	62,3	9630	15	30	57	16"	22	8000	2400	10,40	1 x B	9600	2400	12,00	1 x B	9600	2400	12,00	1 x B
040.2H/310-ANW50		20,9	83,1	9180	14	29	57	16"	28	9600	2400	12,00	1 x B	12800	2400	15,20	1 x B	9600	2400	15,20	1 x B
045.2E/310-ANW50		23,8	81,6	16590	18	42	60	16"	28	9200	3000	12,20	1 x B	13800	3000	16,80	2 x B	16100	4500	20,60	2 x B
045.2F/310-ANW50		27,9	97,9	16200	18	41	60	16"	35	11500	4500	16,00	2 x B	16100	4500	20,60	2 x B	16100	4500	20,60	2 x B
045.2H/310-ANW50		33,7	130,5	15210	17	39	60	16"	35	16100	4500	20,60	2 x B	20700	4500	25,20	2 x B	16100	4500	25,20	2 x B
050.2H/310-ANW50		43,4	171,1	19860	23	44	60	22"	35	21600	4800	26,40	2 x B	28800	4800	33,60	3 x B	16100	4500	25,20	2 x B
071.2E/310-ANW50		53,1	187,0	37650	38	69	58	22"	42	22800	6300	29,10	3 x C	30400	6300	36,70	4 x C	16100	4500	25,20	2 x B
071.2F/310-ANW50		62,8	224,4	36990	38	68	58	22"	54	26500	6300	32,90	3 x C	34200	6300	40,50	4 x C	16100	4500	25,20	2 x B
071.2H/310-ANW50		76,2	299,2	35160	37	66	58	22"	42	34200	6300	40,50	4 x C	45600	6300	51,90	5 x C	16100	4500	25,20	2 x B
080.2F/310-ANW50		97,2	352,0	55980	46	80	67	28"	64	40500	8700	49,20	4 x C	54000	8700	62,70	5 x C	16100	4500	25,20	2 x B
080.2H/310-ANW50		121,8	469,3	53910	45	78	67	28"	64	54000	8700	62,70	5 x C	72000	8700	80,70	7 x C	16100	4500	25,20	2 x B
040.2F/312-ANW50		15,3	52,9	9900	16	29	57	16"	22	8000	2400	10,40	1 x B	9600	2400	12,00	1 x B	9600	2400	12,00	1 x B
040.2H/312-ANW50		19,3	70,6	9420	15	29	57	16"	28	9600	2400	12,00	1 x B	12800	2400	15,20	1 x B	9600	2400	15,20	1 x B