

Güntner GVH 050.1.A/2x2 S

Specifications


Brand	Güntner
Type	GVH 050.1.A/2x2 S
Product type	Air Cooled Condenser
kW	65,2
Number of Fans	4
RPM of the Fans	1390/1180
Refrigerant	Freon
Air Flow in m ³ /h	14.780
diameter fans Ø	500 mm
Surface (m2)	207
Tube volume	54
Sizes	1930x1700x850 mm (LxWxH)
Weight	181 kg
Stock	1



Description

Used Güntner GVH 050.1.A/2x2 S

Used Güntner GVH 050. 1 . A/2x2 S air cooled condensor. Complete with 4 EBM-papst fan 50 Hz - 0,72/0,55 kW - 1390/1180 RPM - diameter 500 mm.
 *All components of this used condensers will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.

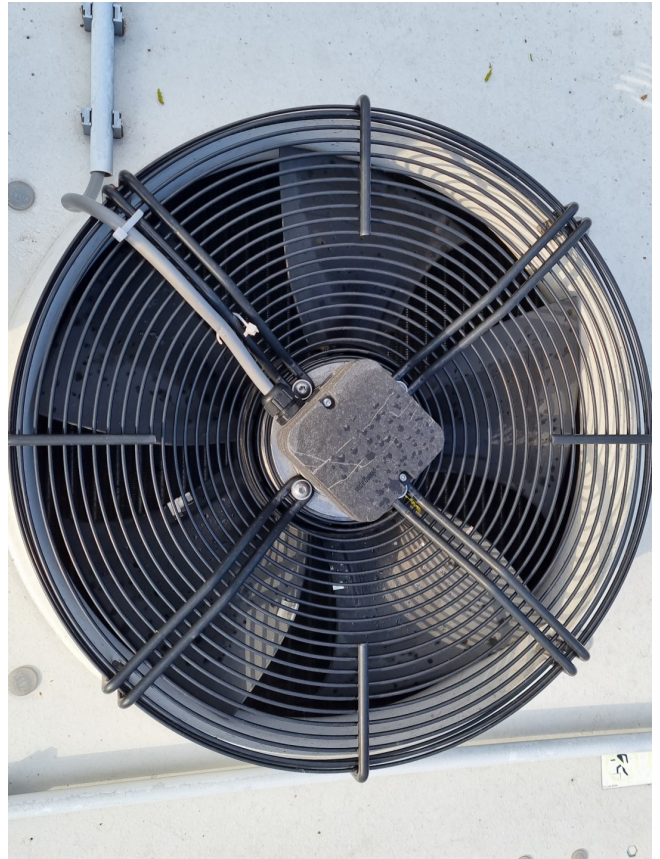



GVH/VS...													
$\dot{Q}_{ev}$ Nonrefrig. Nominal capacity R404A $\Delta t = 15\text{ K}$		$\dot{V}_l$ Luftvolumenstrom Air volume flow		$\dot{P}_{el, total}$ aufgenommene el. Leistung consumed power		Energieeffizienzklasse Energy efficiency class	Schalldruck- pegel Sound pressure level		Strang- Anzahl Number of passes	Gewicht Weight	Rohr- volumen Tube volume	Fläche Surface	
Typ Type	Δ γ		Δ γ		Δ γ			Δ γ					
	kW	kW	m³/h	m³/h	kW		kW	dB(A)10m		dB(A)10m	kg	l	m²
045.1A/1 ... W	11.7	—	2570	—	0.12	—	B	31	31	4	61	8	40
045.1C/1 ... W	13.6	—	2890	—	0.12	—	A	31	31	6	72	10	54
045.1A/2 ... W	23.8	—	5210	—	0.24	—	B	34	34	9	108	15	83
045.1C/2 ... W	27.8	—	5830	—	0.23	—	A	34	34	9	133	19	111
045.1A/3 ... W	35.8	—	7850	—	0.35	—	B	35	35	13	156	23	126
045.1C/3 ... W	41.4	—	8770	—	0.35	—	A	35	35	18	192	30	167
050.1A/1 ... D+S	16.0	13.4	3650	2920	0.13	0.09	A / A	31	27	6	82	11	50
050.1C/1 ... D+S	19.2	16.1	4080	3310	0.13	0.08	A / A	31	27	6	96	16	73
050.1A/2 ... D+S	32.6	27.3	7390	5920	0.26	0.17	A / A	34	30	12	152	22	104
050.1C/2 ... D+S	38.6	32.5	8190	6640	0.26	0.17	A / A	33	29	12	179	31	150
050.1A/3 ... D+S	49.6	41.5	11120	8910	0.4	0.26	A / A	35	31	15	221	32	157
050.1B/3 ... D+S	54.6	45.9	11850	9560	0.39	0.26	A / A	35	31	15	241	40	191
050.1C/3 ... D+S	58.0	48.8	12300	9980	0.38	0.25	A / A	35	31	20	261	47	226
050.1B/4 ... D+S	72.9	61.3	15810	12770	0.52	0.34	A / A	36	32	20	321	53	256
065.1A/1 ... D+S	25.2	20.2	6150	4650	0.36	0.23	B / B	40	33	10	99	16	66
065.1B/1 ... D+S	28.4	23.1	6640	5100	0.35	0.23	B / B	40	33	10	112	19	81
065.1C/1 ... D+S	30.9	25.2	6980	5420	0.34	0.22	B / A	40	33	10	123	22	96
065.1A/2 ... D+S	52.1	42.0	12440	9440	0.72	0.46	B / B	43	36	16	184	30	136
065.1B/2 ... D+S	57.9	46.7	13390	10290	0.7	0.45	B / B	42	35	20	207	36	166
065.1C/2 ... D+S	62.5	51.0	14040	10910	0.68	0.45	B / A	42	35	20	230	43	196
065.1A/3 ... D+S	79.2	63.9	18740	14220	1.07	0.69	B / B	44	37	20	268	46	206
065.1B/3 ... D+S	87.5	71.0	20130	15490	1.05	0.68	B / B	44	37	27	302	56	251
065.1C/3 ... D+S	94.5	77.1	21090	16390	1.02	0.67	B / A	44	37	27	345	66	296
065.1B/4 ... D+S	116.8	94.3	26870	20680	1.4	0.9	B / B	45	38	41	473	73	336
050.1A/2x2 ... D+S	65.2	54.6	14780	11840	0.53	0.35	A / A	36	32	24	181	54	207
050.1C/2x2 ... D+S	77.2	65.0	16380	13290	0.51	0.34	A / A	36	32	24	207	69	299
050.1A/2x3 ... D+S	99.6	83.3	22250	17830	0.79	0.52	A / A	38	34	31	321	72	314
050.1C/2x3 ... D+S	116.1	97.7	24600	19960	0.77	0.34	A / A	38	34	41	457	101	452
065.1A/2x2 ... D+S	104.2	83.9	24890	18870	1.43	0.92	B / B	45	38	32	406	71	272
065.1B/2x2 ... D+S	115.5	93.6	26770	20590	1.4	0.9	B / B	45	38	41	452	83	332
065.1C/2x2 ... D+S	125.3	102.1	28070	21810	1.36	0.89	B / A	45	38	41	497	92	393
065.1A/2x3 ... D+S	158.9	128.0	37470	28430	2.15	1.38	B / B	47	40	41	566	99	412
065.1B/2x3 ... D+S	174.9	141.9	40260	30970	2.1	1.35	B / B	47	40	54	636	116	502
065.1C/2x3 ... D+S	188.9	154.2	42170	32780	2.05	1.34	B / A	47	40	54	713	137	593
065.1B/2x4 ... D+S	233.7	188.6	53740	41350	2.8	1.8	B / B	48	41	82	829	155	672