

Bitzer 44CC-12.2Y-40S / 4CC-6.2Y-40S

Specifications

Brand	Bitzer
Туре	44CC-12.2Y-40S /
	4CC-6.2Y-40S
Refrigerant	Freon
kW at -5ºC/+40ºC	42,3
kW at -10ºC/+40ºC	34,9
kW at -20ºC/+40ºC	22,9
kW at -30ºC/+40ºC	14,0
kW at -40ºC/+40ºC	7,54
kW at -45ºC/+40ºC	5,08
Capacity Control	1
On steel base frame	1
Pressure safety switches	1
Hp/Lp/Op	
Liquid receiver	✓
Suction accumulator	1
Oil separator	✓
Liquid line filter drier	✓
Sight Glass	1
m3 / h	65,0
Remarks	y.o.b. 2004
Sizes	1800x940x1280mm
	(LxWxH)
Stock	1



Description

Used Bitzer 44CC-12.2Y-40S / 4CC-6.2Y-40S

Used Bitzer 44CC-12.2Y-40S tandem semi-hermetic reciprocating compressor wuth capacity control. Complete with liquid receiver, liquid line filter, oil separator, suction accumulator and pressure safety switches.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.




Your partner for used commercial and industrial refrigeration equipment







BITZER K					S.Nr. 16		2Y-408 5102	
Nennspann	ung		Max.Bet			1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	Fördervol.	Drehzahl
State State State	V Y 3Ph~ 380-420	Hz 50	A (Δ) 27,5	A (Y) 15,9	A (Δ)	A (Y) 84.2	m³/h 32.5	min ⁻¹ 1450
DOWN HARD TO	440-480	60	27,5	15,9	107,7	84,2	39,2	1750

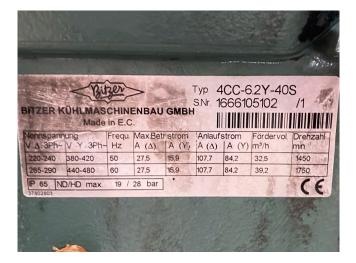





Your partner for used commercial and industrial refrigeration equipment







Your partner for used commercial and industrial refrigeration equipment

