

Mycom 200VMD 5.8

Specifications

Brand	Mycom
Туре	200VMD 5.8
Refrigerant	Freon
kW at 0ºC/+40ºC	890,4
kW at -5ºC/+40ºC	742,3
kW at -10ºC/+40ºC	613,4
kW at -20ºC/+40ºC	405,8
kW at -30ºC/+40ºC	253,7
kW at -40ºC/+40ºC	145,5
Electromotor Specs	50 Hz - 160 kW - 2950
	RPM
Unloaded Start	/
Capacity Control	1
On steel base frame	1
Oil separator	1
Solenoid Valve	1
Control panel	1
Remarks	Please notice that the
	capacities are based on
	a bigger electric motor
Sizes	3250x1550x2500 mm
	(LxWxH)
Stock	1



Description

Used Mycom 200VMD 5.8

Used Mycom 200VMD 5.8 screw compressor on Freon. Complete with a Leroy-Somer PLS315S-T electric motor -50 Hz - 160 kW - 2950 RPM, Mycom HS 7530-200 oil separator, Mycom OC-15245 oil cooler, Mycom OFC 50 oil filter, Mycom M50P-M oil pump, brazed heat exchanger and a control cabinet with a Mycom MYPRO-CP3 controller. Please notice that the capacities are based on a bigger electric motor. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment soley if it has passed our extensive quality test and after it has been cleaned industrially. *If requested we are happy to arrange your shipment.
































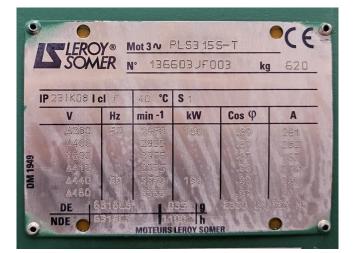







www.hosbv.com















