

Bitzer 4EC-6.2Y Condensing unit

Specifications

Brand	Bitzer
Туре	4EC-6.2Y Condensing
	unit
Refrigerant	Freon
kW at 0ºC/+40ºC	17,8
kW at -5ºC/+40ºC	14,8
kW at -10ºC/+40ºC	12,1
kW at -20ºC/+40ºC	7,9
kW at -30ºC/+40ºC	4,7
kW at -40ºC/+40ºC	2,4
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Liquid receiver	✓
Oil separator	✓
Liquid line filter drier	✓
Sight Glass	✓
Solenoid Valve	✓
Control panel	✓
m3 / h	50 Hz - 22,1 m³/h / 60 Hz
	- 27,4 m³/h
Remarks	Y.o.b. 2001
Condensing Unit	✓
Sizes	1450x1120x1460 mm
	(LxWxH)
Stock	4



Description

Used Bitzer 4EC-6.2Y Condensing unit


Used Condensing unit on Freon. Complete with a Bitzer 4EC-6.2Y semihermetic reciprocating compressor, condenser with 4 OLMO R11R-4035A-4M-5732 fans - 50 Hz -0,30 kW - 1390 RPM, liquid receiver, oil separator, pressure and safety switch and a control cabinet. The compressor has a displacement of 22,1 m³/h at 50 Hz & 27,4 m³/h at 60 Hz. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment solely if it has passed our extensive test. Warranty and industrial cleaning are included in your purchase. *If requested we are happy to arrange your shipment.



Your partner for used commercial and industrial refrigeration equipment





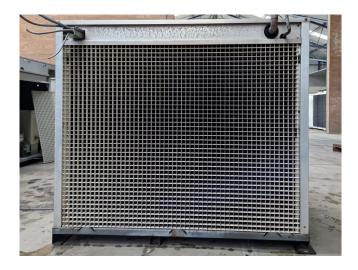









Your partner for used commercial and industrial refrigeration equipment



1	BITZER KI	UHLMASC Made i		> IBAU GI		Fyp 4 S.Nr. 6			
	Nennspan V ∆ 3Ph~	nung V Y 3Ph~	Frequ. Hz	Max.Be A (∆)	tr.strom A (Y)		strom .	Fördervol. m ³ /h	Drehzahi min ⁻¹
	220-240	380-420	50	22,9	13,2	109,1	63	22,14	1450
	265#290	440-480	60	22,9	13,2	109,1	.63	27,4	1750
	IP 65 NE 378 028-03	D/HD max	(. 19 /	28 bar					(6
			172 0						
					1.7			3998	100
								Ter sil	



						Lide ka		Share and
BITZER K		CHINEN	>	5	yp 41 5.Nr. 6	EC-6. 60411		
Nennspan	Made i	n E.C. Frequ.	Max.Be	tr.strom	Anlaufs	6604 strom	Fördervol. m ³ /h	Drehzahl
V ∆ 3Ph~ 220-240	V Y 3Ph~ 380-420	Hz 50	A (Δ) 22,9	A (Y) 13,2	A (Δ) 109,1	A (Y) 63	22,14	1450
265-290	440-480	60 -	22,9	13,2	109,1	63	27,4	1750
IP 65 NI 378 028-03	D/HD max	<u>(. 19 /</u>	28 bar			,		"



Your partner for used commercial and industrial refrigeration equipment

	Bits DHLMASC Made in	n E.C.		мвн	S.Nr. (4EC-6 66044	763	
220-240 265-290	NUNG V Y 3Ph~ 380-420 440-480	50	A (Δ) 22,9	tr.strom A (Y) 13,2 13,2	Anlaut A (Δ) 109,1 109,1	63 63		Drehzahl min ⁻¹ 1450 1750
376.028-03								CE







