

Howden MK6A/WRV20419350/601

Specifications

Brand	Howden
Туре	MK6A/WRV20419350/60
	1
Refrigerant	NH 3 (ammonia)
kW at -5ºC/+40ºC	786,0
kW at -10ºC/+40ºC	628,0
kW at -20ºC/+40ºC	369,0
kW at -30ºC/+40ºC	182,0
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	 Image: A second s
Hp/Lp/Op	
Oil separator	✓
Liquid line filter drier	✓
Sight Glass	✓
Control panel	✓
m3 / h	1320 m³/h
Sizes	4300x1600x2150 mm
	(LxWxH)
Stock	1



Description

Used Howden MK6A/WRV20419350/601

Used Howden MK6A/WRV20419350/601 screw compressor on NH3 (Ammonia). Complete with a Schorch KN7315M-AB01B electric motor - 50/60 Hz -200/230 kW - 2975/3575 RPM, SES T61 oil separator with a volume 510 liters, oil cooler, pressure and safety switches/gauges, Viking AK4195 oil pump with a Brook Crompton T-DA112MA/00-17 electric motor and a control cabinet. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.














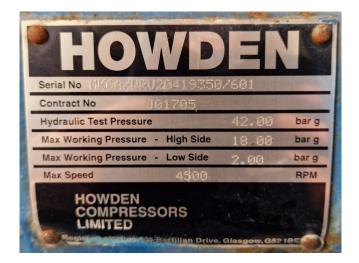





a second and the seco
SCHORCH (C)
Typ KN7315M-AB01B IEC 315M IMB3 2000 Nr. 27729001/1
3~ MOT. IP23
Th.Cl. F 860 kg
50 Hz 200 kW S1 0 60 Hz 230 kW S1
400 V A / 690 V Y
335 A / 195 A 335 A
cosφ=0,91 cosφ=0,91
2975/min 3575/min
380-420 V △ / 655-725 V Y 440-480 V △
355-325 A / 205-187 A 350-325 A
Lager AS: 6316 C3
Lager GS: 6316 C3 nach 3500h/35g Fett
DIN 51825-K3K Li-
Seife/Mineralöl Made in Germany
6154510
The second se



























