

# Bitzer HSK6461-40-40P (x1) & HSK6461-60-40P (x1)

#### **Specifications**

Type HSK6461-40-40P (x1) & HSK6461-60-40P (x1) & HSK6461-60-40P (x1)  Refrigerant Freon  kW at 0°C/+40°C 321,6  kW at -5°C/+40°C 276,4  kW at -10°C/+40°C 235,8  kW at -20°C/+40°C 166,8  Capacity Control ✓ On steel base frame ✓  Pressure safety switches ✓  Hp/Lp/Op  Pressure gauges ✓  Hp/Lp/Op
Refrigerant Freon  kW at 0°C/+40°C 321,6  kW at -5°C/+40°C 276,4  kW at -10°C/+40°C 235,8  kW at -20°C/+40°C 166,8  Capacity Control  On steel base frame  Pressure safety switches  Hp/Lp/Op  Pressure gauges
kW at 0°C/+40°C 321,6 kW at -5°C/+40°C 276,4 kW at -10°C/+40°C 235,8 kW at -20°C/+40°C 166,8  Capacity Control  On steel base frame  Pressure safety switches  Hp/Lp/Op  Pressure gauges
kW at -5°C/+40°C 276,4 kW at -10°C/+40°C 235,8 kW at -20°C/+40°C 166,8  Capacity Control  On steel base frame  Pressure safety switches  Hp/Lp/Op  Pressure gauges
kW at -10°C/+40°C 235,8 kW at -20°C/+40°C 166,8  Capacity Control  On steel base frame  Pressure safety switches  Hp/Lp/Op  Pressure gauges
kW at -20°C/+40°C 166,8  Capacity Control   On steel base frame   Pressure safety switches   Hp/Lp/Op  Pressure gauges   ✓
Capacity Control  On steel base frame  Pressure safety switches  Hp/Lp/Op  Pressure gauges
On steel base frame   Pressure safety switches   Hp/Lp/Op  Pressure gauges
Pressure safety switches  Hp/Lp/Op Pressure gauges
Hp/Lp/Op Pressure gauges ✓
Pressure gauges ✓
Hp/Lp/Op
Liquid receiver 🗸
Liquid receiver ltr. 228 L
Oil separator 🗸
Liquid line filter drier 🗸
Sight Glass 🗸
Solenoid Valve
m3 / h $$ 50 Hz - 330 m³/h / 60 Hz
- 396 m³/h
Remarks   Y.o.b. 2013
Package / Rack





### Your partner for used commercial and industrial refrigeration equipment

(LxWxH)

**Stzesk 2**400x1400x2100 mm

#### **Description**

### Used Bitzer HSK6461-40-40P (x1) & HSK6461-60-40P (x1)

Used Bitzer HSK6461-40-40P (x1) & HSK6461-60-40P (x1) semi-hermetic screw compressors package on Freon. Complete with a Bitzer F2202N liquid receiver with a volume of 228 liters, Bitzer OA4088 oil separator, pressure safety switches/gauges, 2 BHE economizer, and liquid line filter drier. The compressor has a displacement of 330 m³/h at 50 Hz and 396 m³/h at 60 Hz.


\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. \*Optional we can also perform a new paint job and arrange the logistics.

**HOS BV** www.hosbv.com info@hosbv.com (+31) (0)23-5404237



### Your partner for used commercial and industrial refrigeration equipment



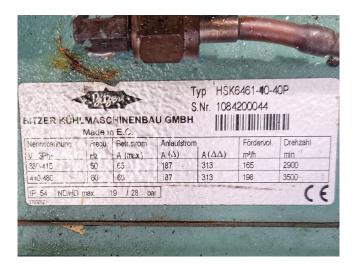




































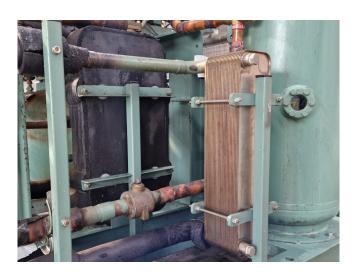



## Your partner for used commercial and industrial refrigeration equipment

(+31) (0)23-5404237

