

# Lennox WW 255D-LN

## Specifications

|                  |                                                        |
|------------------|--------------------------------------------------------|
| Brand            | Lennox                                                 |
| Type             | WW 255D-LN                                             |
| Product type     | Water Cooled Chiller                                   |
| Capacity kW      | 300,3                                                  |
| Capacity Tons    | 85                                                     |
| Refrigerant      | Freon                                                  |
| Refrigerant Type | R407C                                                  |
| Weight in kg.    | 1720                                                   |
| Sizes            | 3400x800x1700 mm<br>(LxWxH)                            |
| Remarks          | y.o.b. 2000 // 6x<br>Compressor Performer<br>SZ185S4RA |
| Stock            | 1                                                      |




## Description

### Used Lennox WW 255D-LN

y.o.b. 2000 // 6x Compressor Performer  
SZ185S4RA



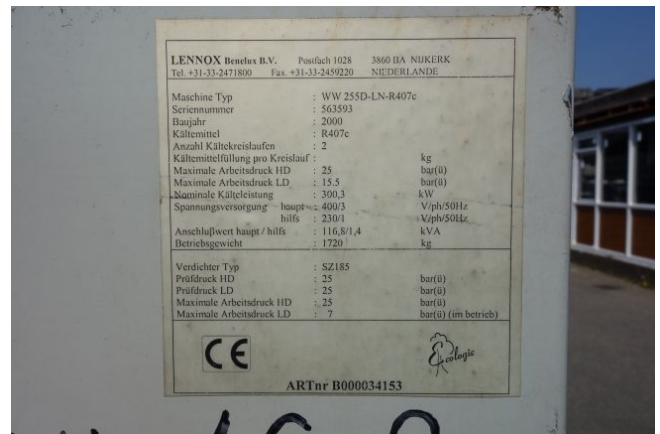



Dampfdrucktabelle (Auszug)  
Alle Angaben im Sättigungszustand, Druckwerte in bar absolut.

| Temperatur<br>°C | R 407C  |            | R 22  |
|------------------|---------|------------|-------|
|                  | flüssig | dampförmig |       |
| +65              | 30,35   | 27,93      | 26,87 |
| +60              | 27,33   | 24,85      | 24,15 |
| +58              | 26,18   | 23,69      | 23,12 |
| +56              | 25,07   | 22,58      | 22,12 |
| +54              | 24,00   | 21,51      | 21,16 |
| +52              | 22,95   | 20,49      | 20,23 |
| +50              | 21,94   | 19,50      | 19,33 |
| +48              | 20,97   | 18,54      | 18,46 |
| +46              | 20,02   | 17,63      | 17,62 |
| +44              | 19,11   | 16,75      | 16,81 |
| +42              | 18,22   | 15,91      | 16,02 |
| +40              | 17,37   | 15,09      | 15,27 |
| +30              | 13,53   | 11,50      | 11,88 |
| +20              | 10,35   | 8,61       | 9,08  |
| +18              | 9,79    | 8,10       | 8,59  |
| +16              | 9,25    | 7,62       | 8,11  |
| +14              | 8,73    | 7,16       | 7,66  |
| +12              | 8,23    | 6,72       | 7,22  |
| +10              | 7,76    | 6,30       | 6,80  |
| +8               | 7,30    | 5,90       | 6,40  |
| +6               | 6,87    | 5,53       | 6,02  |
| +4               | 6,46    | 5,17       | 5,66  |
| +2               | 6,06    | 4,83       | 5,31  |
| 0                | 5,68    | 4,50       | 4,98  |
| -2               | 5,32    | 4,20       | 4,66  |
| -4               | 4,98    | 3,90       | 4,36  |
| -6               | 4,66    | 3,63       | 4,08  |
| -8               | 4,35    | 3,37       | 3,81  |
| -10              | 4,06    | 3,13       | 3,55  |
| -12              | 3,78    | 2,90       | 3,31  |
| -14              | 3,52    | 2,68       | 3,08  |
| -16              | 3,27    | 2,47       | 2,86  |
| -18              | 3,03    | 2,28       | 2,65  |
| -20              | 2,81    | 2,10       | 2,46  |







Your partner for used commercial and  
industrial refrigeration equipment

---