

Bock F5 (x4)

Specifications

Brand	Bock
Type	F5 (x4)
Refrigerant	Freon
kW at +10°C/+40°C	333.32
kW at 0°C/+40°C	237.6
kW at -5°C/+40°C	196.60
kW at -10°C/+40°C	160.04
kW at -20°C/+40°C	99.79
kW at -30°C/+40°C	55.92
kW at -40°C/+40°C	27.56
kW at -45°C/+40°C	18.88
Electromotor Specs	15
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Liquid receiver	✓
Oil separator	✓
Liquid line filter drier	✓
Remarks	# // 1x Electromotor missing // Electromotor: 15 kW at 1460 RPM // Pulley EM: 230 / Pulley Compr: 230
Remarks	R404a - R22 or other freon types






Your partner for used commercial and
industrial refrigeration equipment

Package / Rack	✓
Sizes	4200x1500x2200 mm (LxWxH)
Stock	1

Description

Used Bock F5 (x4)

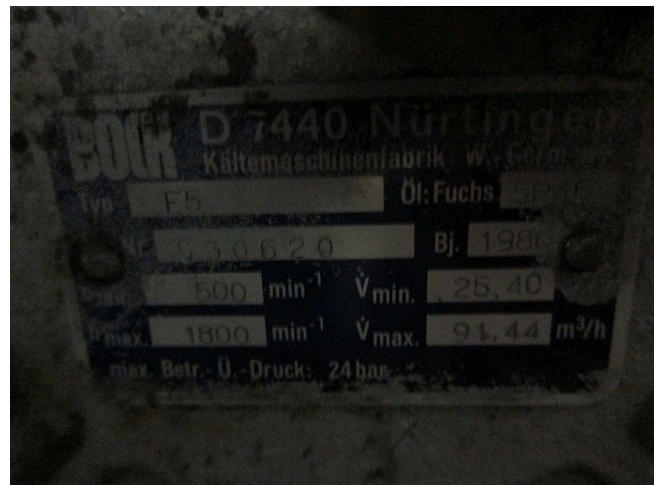

R404A/R507		Performance data										1.450 rpm	
Type	Cond. temp.	Cooling capacity Q _c [W]										Power P [kW]	
	°C	Evaporating temperature °C											
		10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45
FX2	30	Q 13423	11418	9621	8020	6606	5366	4290	3368	2584	1933	1402	979
		P 2,21	2,19	2,13	2,05	1,94	1,80	1,65	1,48	1,31	1,12	0,94	0,75
	40	Q 11561	9785	8201	6797	5562	4485	3555	2761	2092	1537	1085	724
		P 2,65	2,56	2,44	2,30	2,13	1,95	1,76	1,55	1,34	1,12	0,91	0,70
	50	Q 9652	8113	6749	5548	4500	3593	2816	2159	1609	1157	791	
FX3	30	Q 1032	878	731	601	494	401	317	248	190	137	96	
		P 3,02	2,88	2,71	2,51	2,30	2,07	1,83	1,59	1,34	1,10	0,86	
	40	Q 8842	7415	6165	5077	4141	3346	2641	2041	1541	1141	841	
		P 3,02	2,88	2,71	2,51	2,30	2,07	1,83	1,59	1,34	1,10	0,86	
	50	Q 7047	5921	4913	4014	3215	2516	1917	1418	1019	719	519	
FX4	30	Q 2498	2073	1747	1445	1191	9957	7710	6024	4628	3442	2458	1650
		P 4,97	4,64	4,30	4,03	3,71	3,40	3,07	2,74	2,41	2,08	1,75	1,57
	40	Q 2084	17356	14488	11985	9971	7889	6348	4960	3860	2690	1862	1264
		P 5,90	5,45	5,00	4,65	4,20	3,85	3,40	3,05	2,70	2,35	2,00	1,65
	50	Q 1509	12365	10365	8585	7117	5633	4437	3437	2617	1917	1357	947
FX5	30	Q 5309	4365	3685	3117	2633	2173	1719	13292	1011	7559	5476	3862
		P 11,74	11,20	10,57	9,75	8,75	7,68	6,64	5,56	4,66	3,96	3,29	2,69
	40	Q 4917	3958	3308	2736	2270	1817	14063	9928	7618	5838	4388	3138
		P 10,09	9,75	9,27	8,67	7,98	7,21	6,41	5,59	4,78	4,00	3,27	2,63
	50	Q 3912	3178	2619	2177	1781	1442	1108	8782	6786	5186	3986	2986
FX14/1166	30	P 11,44	10,83	10,10	9,28	8,40	7,47	6,53	5,59	4,69	3,85	3,09	
	40	Q 9564	8144	6923	5754	4760	3852	3053	2364	1768	1298	9105	6424
		P 12,88	12,43	11,79	10,94	10,01	8,95	7,88	6,81	5,74	4,67	3,60	2,57
	50	Q 8330	7084	5801	4914	4014	3195	2468	1857	1381	965	690	478
		P 16,87	16,64	16,05	15,16	14,03	12,72	11,28	9,79	8,29	6,99	5,99	5,29
FX14/1366	30	Q 7047	5921	4913	4014	3258	2545	1942	1480	1062	737	516	
		P 20,21	19,31	18,12	16,70	15,11	13,41	11,67	9,93	8,26	6,73	5,36	
	40	Q 13165	11064	9264	7664	6264	5000	4000	3203	2447	1780	1267	857
		P 17,86	18,55	18,64	18,22	17,37	16,17	14,71	13,06	11,32	9,58	7,85	6,29
	50	Q 11450	9738	8127	6728	5504	4366	3426	2606	1927	1371	948	656