

Mycom 200 VMD 2.6

Specifications


Brand	Mycom
Type	200 VMD 2.6
Refrigerant	NH 3 (ammonia)
kW at +10°C/+40°C	1415
kW at 0°C/+40°C	1022,4
kW at -5°C/+40°C	855
kW at -10°C/+40°C	707,4
kW at -20°C/+40°C	463,9
kW at -30°C/+40°C	282,5
kW at -40°C/+40°C	149
Capacity Control	✓
Remarks	End clearance: 0,07 - 0,06 FM / Bearings: 0,01 - 0,01 FM / Balance- Piston(set): CS0309 EH / CS0309 EH / Pakking: CS0231-E / CS02300-200 N/ D-ring:PA2401-125 / PA11-125/ Teflon:CS0660-E / CS0660
Weight in kg.	710 kg
Sizes	1350x800x550 mm (LxWxH)
Project	2.6 (vi)
Stock	1







Description

Used Mycom 200 VMD 2.6

Serviced, painted, ready to install!
Mycom 200 VMD 2.6 (vi) industrial screw refrigeration compressor. // s/n:2035466 // Refrigerant (NH3) // Parts replaced (See PDF)

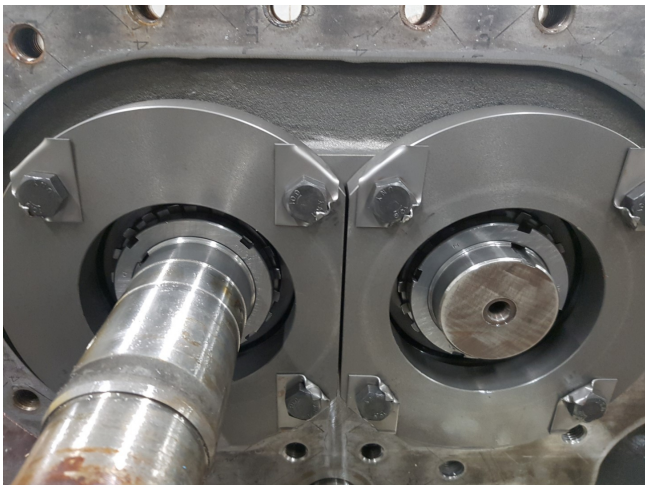

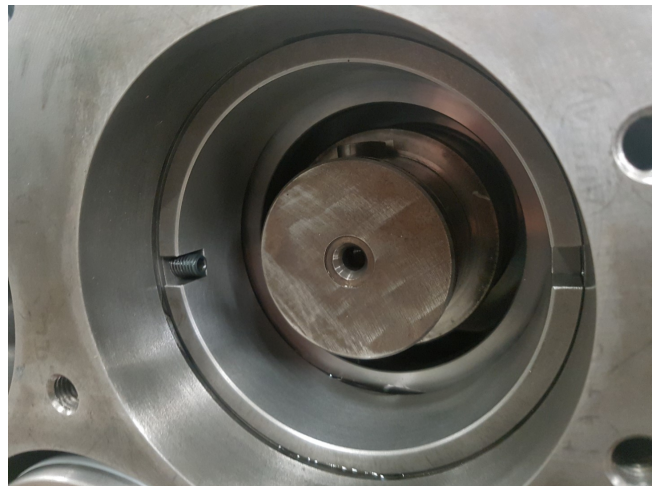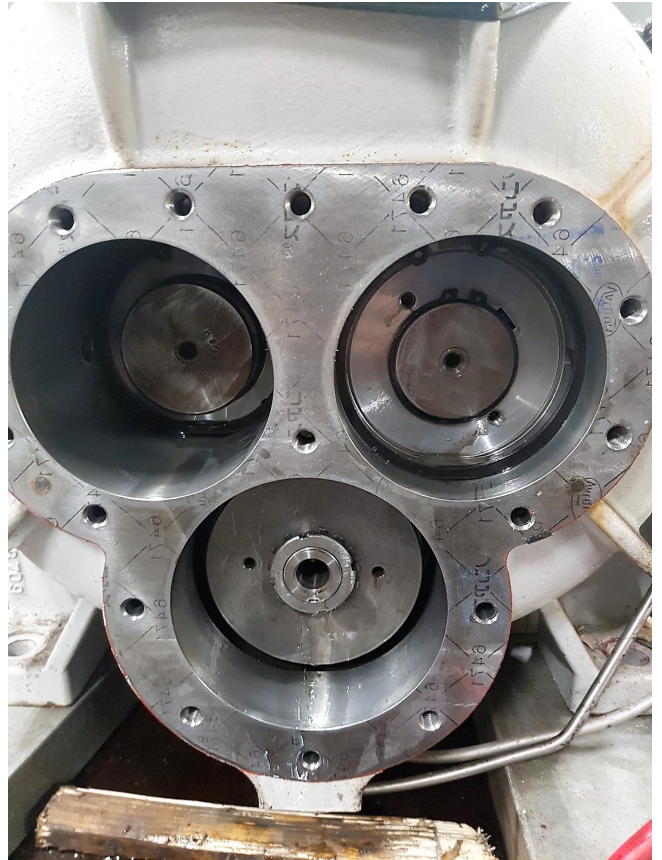

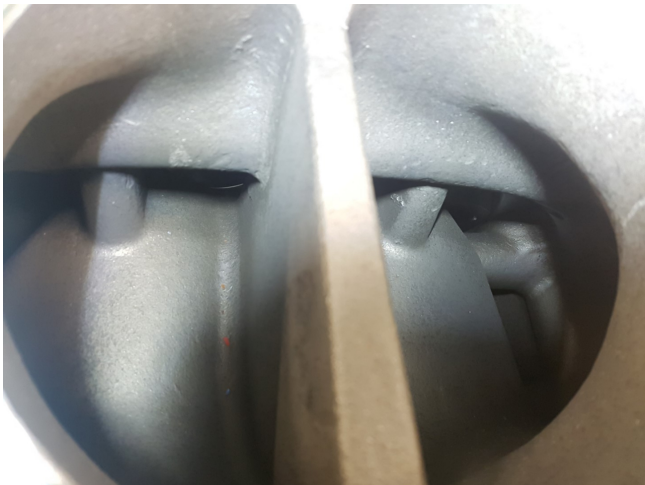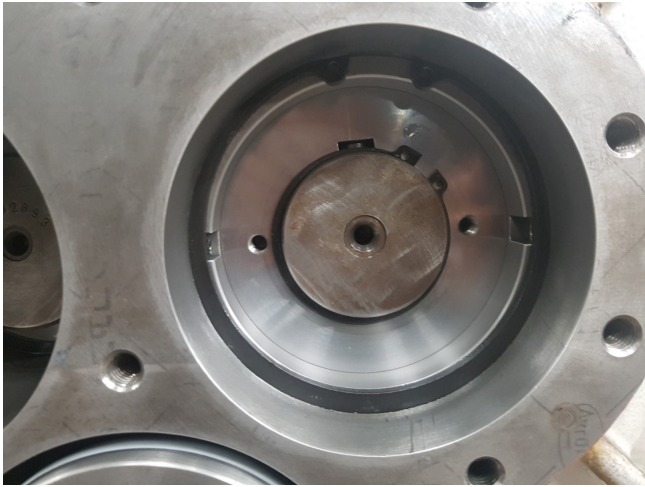



Replaced:

- End clearance: 0,07 - 0,06 FM
- Bearings: 0,01 - 0,01 FM
- Balance-Piston(set): CS0309 EH / CS0309 EH
- Gaskets: CS0231-E / CS02300-200 N
- D-ring: PA2401-125 / PA11-125
- Teflon: CS0660-E / CS0660