Bitzer 4J-22.2

Specifications

Brand	Bitzer
Type	4J-22.2
Refrigerant	Freon
kW at 0ºC/+40ºC	51,5
kW at -5ºC/+40ºC	42,7
kW at -10ºC/+40ºC	35,1
kW at -20ºC/+40ºC	22,8
kW at -30ºC/+40ºC	13,7
kW at -40ºC/+40ºC	7,1
Unloaded Start	✓
Capacity Control	✓
Sight Glass	✓
Solenoid Valve	✓
m3 / h	63,5
Weight in kg.	190
Package / Rack	✓
Sizes	700x530x460 mm (LxWxH)
Stock	1

Description

Used Bitzer 4J-22.2

Used Bitzer 4J-22.2 semi-hermetic reciprocating compressor on Freon. Complete with unloaded start, capacity control and a sight glass. The compressor has a displacement of 63,5 m³/h.
*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and an industrial cleaning. *Optionally we can also perform a new paint job and arrange the logistics.

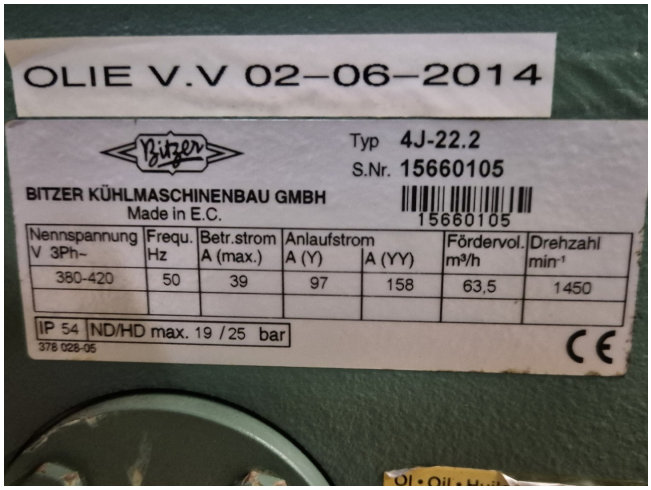
OLIE V.V 02–06–2014
Bitzer
Typ 4J-22.2
S.Nr. 15660105
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
15660105
Nennspannung V 3Ph~
Frequ. Hz
Betr.strom A (max.)
Anlaufstrom A (Y)
A (YY)
Fördervol. m³/h
Drehzahl min⁻¹
380-420
50
39
97
158
63,5
1450
IP 54
ND/HD max. 19 / 25 bar
378 026-05
CE