

Bock HGX4/650-4 S

Specifications



Brand	Bock
Type	HGX4/650-4 S
Refrigerant	Freon
kW at 0°C/+40°C	46.7
kW at -5°C/+40°C	37.9
kW at -10°C/+40°C	31.2
kW at -20°C/+40°C	20.3
kW at -30°C/+40°C	12.2
kW at -40°C/+40°C	6.6
Package / Rack	✓
Stock	1



Description

Used Bock HGX4/650-4 S

Used Single-stage Bock Compressors type HGX4/650-4 S . Our capacity table is based on the used type of Freon. You can also use these compressors on alternative types of Freon. For all the other specs (if available), see the picture of the manufacturer model plate or the attached pdf file. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

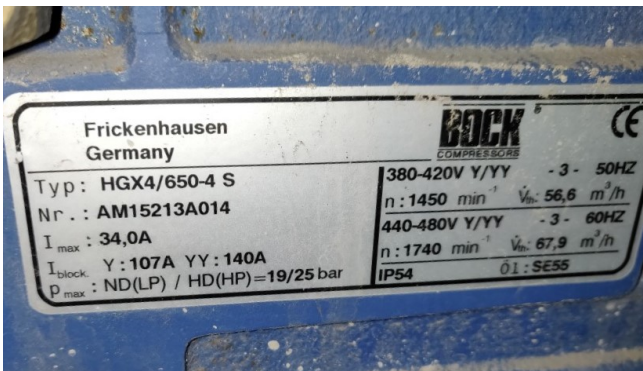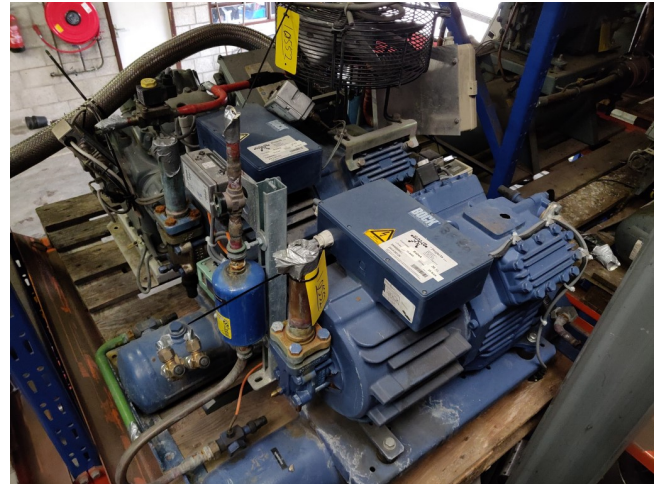

R404A/R507		Performance data										50 Hz	
Type	Cond. temp. °C	Cooling capacity \dot{Q}_0 [W]										Power consumption P_e [kW]	
		Evaporating temperature °C											
		7.5	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45
HGX4/555-4 ¹⁾	30 Q	59014	54222	45450	37853	31129	25129	20184	15848	12194	9164	6702	4751
	40 Q	1152	1134	10,89	10,34	9,72	8,99	8,19	7,34	6,47	5,59	4,73	3,89
	50 Q	50452	46260	38616	32112	26739	21212	16857	13155	10050	7484	5401	3743
	50 P	13,64	13,29	12,51	11,84	10,88	9,86	8,81	7,74	6,69	5,67	4,72	3,88
HGX4/555-4 S ¹⁾	30 Q	41937	38348	31838	26484	21544	17286	13653	10589	8036	5938	4236	3186
	40 Q	15,53	15,01	13,93	13,14	11,87	10,58	9,30	8,04	6,83	5,70	4,66	3,66
	50 Q	21842	17569	13875	10713	8037	5799	4127	2844	2044	1514	1124	879
	50 P	9,46	8,27	7,14	6,04	4,99	3,98	3,01	2,12	1,34	0,73	0,39	0,21
HAX4/555-4	30 Q	18374	14675	11488	8766	6461	4528	3184	2244	1584	1104	774	549
	40 Q	15013	11884	9220	6844	5018	3596	2518	1744	1244	874	594	419
	50 Q	70903	65224	54821	44444	36811	30119	24302	19297	15039	11465	8510	6178
	50 P	14,57	14,19	13,41	12,51	11,70	10,80	9,84	8,84	7,82	6,80	5,80	4,78
HGX4/650-4 ¹⁾	30 Q	62815	55879	46795	37926	31232	25384	20322	15942	12288	9008	6647	4958
	40 Q	16,84	16,29	15,22	14,50	13,15	11,94	10,70	9,45	8,21	7,01	5,86	4,73
	50 Q	50791	46523	38768	31303	25585	20586	16302	12650	9564	6980	4835	3474
	50 P	18,06	18,38	17,02	15,79	14,31	12,81	11,31	9,83	8,39	7,02	5,73	4,72
HAX4/650-4	30 Q	24978	20136	15945	12352	9304	6747	4747	3244	2244	1544	1044	747
	40 Q	9,71	8,82	7,57	6,54	5,55	4,57	3,59	2,61	1,64	0,73	0,39	0,21
	50 Q	21012	16819	13202	10107	7480	5268	3747	2644	1844	1244	844	568
	50 P	10,39	9,10	7,86	6,67	5,53	4,42	3,31	2,21	1,11	0,61	0,31	0,18
R404A/R507	30 Q	71767	13632	10586	806	5809	3951	2745	1945	1345	945	645	445
	40 Q	16,91	9,46	8,05	6,71	5,43	4,20	3,11	2,18	1,44	0,94	0,54	0,30
	50 Q	76254	70105	58815	48024	39230	31558	24934	19288	14546	10836	7486	5016
	50 P	19,31	18,78	18,03	17,04	15,70	14,21	12,71	11,13	9,44	7,70	6,47	5,43