Goedhart VCI-B 12568 EF

Specifications

Brand	Goedhart
Type	VCI-B 12568 EF
kW	37.1
Refrigerant	Freon
Number of Fans	2
Fin Space in mm	8
Defrosting	Electric
m³/h	19.057
Sizes	2656x1130x920mm (LxWxH)
Remarks |	Ø 560MM
Remarks ||	YOB 2012
Volume	69dm3
Weight	380kg
Stock	2

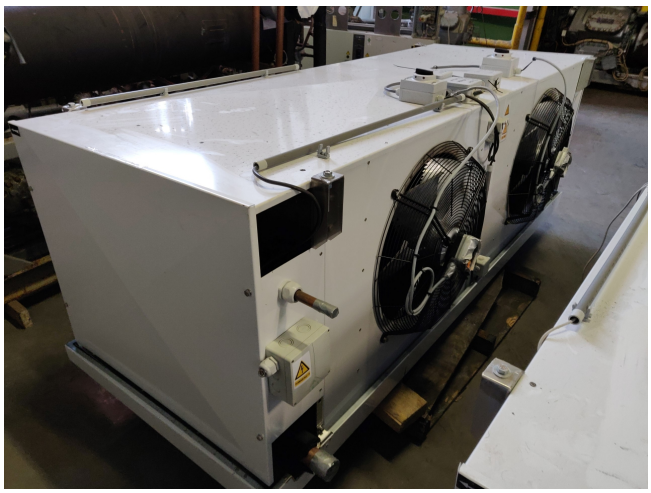

Description

Used Goedhart VCI-B 12568 EF

Used, but as good as new, evaporator build by Goedhart type VCI-B 12568 EF with 37.1 kW, 69dm3, 19.057m3/h, YOB 2012 weight 380kg. Fan: Ø 560MM

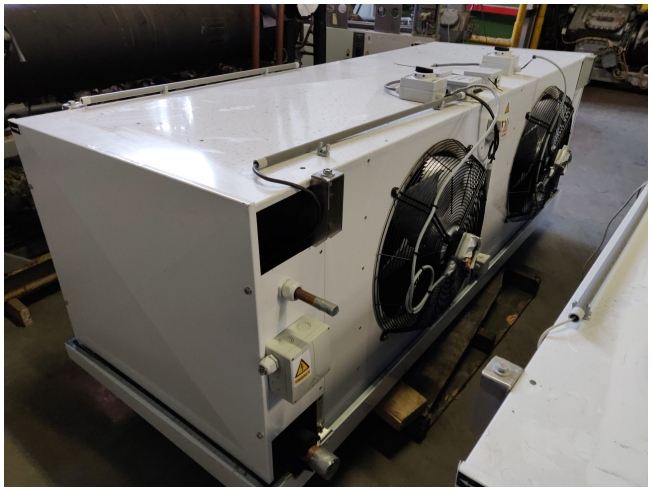

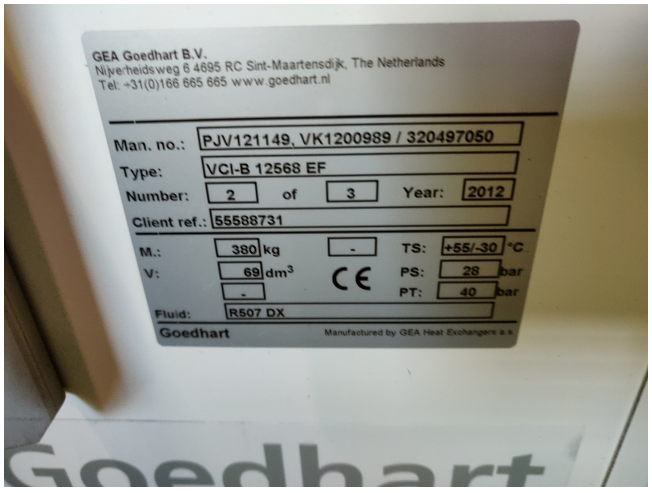

	Type VCI	R404A DT1 = 10K (SCT) air in = 0°C (U = 10)	R404A DT1 = 8K (SCT) air in= 0°C (U = 6)	R404A DT1 = 7K (SCT) air in= -18°C (25/18)	Air volume	LpA @ 3 m (+/- 2 dB(A))*	Surface	Internal volume	Weight	L	B	H	C	E E1	E2	E3	D1	D2	Refrigerant In	Refrigerant Uit	Refrigerant Hot gas	Air throw**
		kW	kW	kW	m³/h	dB(A)	m²	dm³	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	m
2x	6.2.40.8		10,0	7,1	6651	57,0	59	17	135	1856	740	620	600	1456			928		12	22	19	20
	8.2.40.8		11,9	8,5	6355	57,0	79	22	158	1856	840	620	700	1456			928		12	28	19	20
	1.2.40.8		13,2	9,5	6082	57,0	98	28	180	1856	940	620	800	1456			928		12	28	19	20
	6.2.45.8		14,4	10,1	10065	58,9	81	23	164	2056	710	720	600	1656			1028		12	28	19	22,5
	8.2.45.8		17,0	12,4	9575	58,9	108	30	194	2056	810	720	700	1656			1028		16	28	19	22,5
	1.2.45.8		19,2	13,6	9134	58,9	135	38	222	2056	910	720	800	1656			1028		16	35	19	22,5
	6.2.50.8		19,2	13,9	14249	61,7	101	29	219	2456	830	720	700	2056			1228		16	35	19	25
	8.2.50.8		22,9	16,7	13700	61,7	135	38	254	2456	930	720	800	2056			1228		16	35	19	25
	1.2.50.8		26,3	18,8	13203	61,7	168	47	289	2456	1030	720	900	2056			1228		16	35	35	25
	6.2.56.8		27,9	19,8	20231	65,4	148	42	293	2656	930	920	800	2256			1328		16	35	35	27,5
	8.2.56.8		33,3	21,8	19650	65,4	197	55	341	2656	1030	920	900	2256			1328		16	42	35	27,5
	1.2.56.8		37,1	26,6	19057	65,4	247	69	389	2656	1130	920	1000	2256			1328		16	42	35	27,5
	6.2.63.8		30,1	23,9	23747	69,2	202	57	387	2856	945	1120	860	2456			1428		16	42	35	27,5
	8.2.63.8		42,6	31,2	24579	69,2	269	75	449	2856	1045	1120	900	2456			1428		22	42	35	27,5
	1.2.63.8		47,8	35,2	24021	69,2	336	94	511	2856	1145	1120	1000	2456			1428		22	42	35	27,5
	6.2.45.8		21,7	15,3	15001	60,4	121	34	231	2856	710	720	600	2456			1428		16	35	19	22,5