

Güntner GVH 090.2A/2x3-N(S)

Specifications

Brand	Güntner
Type	GVH 090.2A/2x3-N(S)
Product type	Air Cooled Condenser
kW	609
Number of Fans	3
RPM of the Fans	890/700
Refrigerant	Freon
Air Flow in m ³ /h	167.400
diameter fans Ø	910 mm
Surface (m ²)	1.502
Tube volume	206 dm ³
Sizes	6200x2300x1450 mm
Weight	1.377 kg
Remarks	y.o.b. 2009
Stock	1





Description

Used Güntner GVH 090.2A/2x3-N(S)

Used Guntner GVH 090.2A/3-N(S) air cooled condensor. Complete with 6 Ziehl-Abegg fans 50 Hz - 2,79/1,36 kW - 890/700 RPM - diameter 900 mm. Build in 2009.

*All components of this used condensers will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

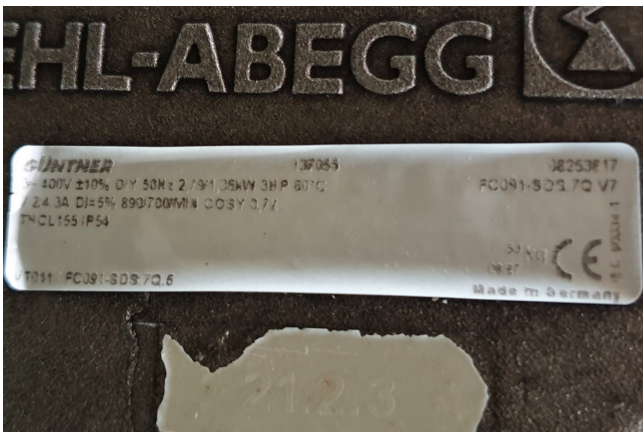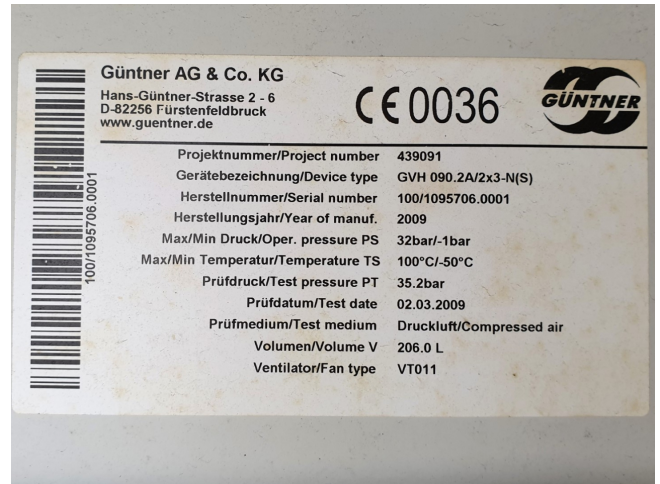

Leistungstabellen für Temperaturbedingungen nach Eurovent Gewichte und Maße

Capacity tables for temperature conditions acc. to Eurovent Weights and Measures

GVH/VN... - 2 reihig - 2 rows														
	Q _{ev}		V _a		aufgenommene el. Leistung		Energieeffizienzklasse Energy efficiency class	Schalldruck- pegel		Strang- Anzahl	Gewicht	Rohr- volumen	Fläche	
typ	Nennleistung		Luftvolumenstrom		consumed power			Sound pressure level						
Nominal capacity	Air volume flow													
Type	R404A Δt = 15 K				P _e total									
	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Number of passes	Weight	Tube volume	Surface
	kW	kW	m³/h	m³/h	kW	kW	dB(A)10m	dB(A)10m			kg	l	m³	m²
080.3A/2x2	316	261	76800	95200	6.9	4.6	C / C	54	47	45	890	141	1002	
080.3B/2x2	349	289	81600	63600	6.8	4.6	C / C	54	47	45	1020	166	1212	
080.3A/2x3	480	395	115200	88800	10.4	6.8	C / C	55	48	67	1243	205	1502	
080.3B/2x3	521	429	122400	95400	10.3	6.8	C / C	55	48	135	1431	243	1819	
080.3A/2x4	638	523	153600	118400	13.8	9.1	C / C	57	50	135	1643	259	2003	
080.3B/2x4	709	583	163200	127200	13.7	9.1	C / C	56	49	135	1899	308	2425	
080.3A/2x5	809	663	192000	148000	17.3	11.4	C / C	57	50	135	2059	318	2504	
080.3B/2x5	894	736	204000	159000	17.1	11.4	C / C	57	50	135	2288	386	3031	
080.3A/2x6	978	801	230400	177600	20.8	13.7	C / C	58	51	135	2468	383	3005	
090.2A/2x2	408	357	111600	91600	14.3	9.6	E / D	63	57	67	980	141	1002	
090.2B/2x2	459	390	120000	95200	14.2	9.5	D / D	63	57	67	1109	166	1212	
090.2A/2x3	609	530	167400	137400	21.5	14.4	E / D	64	58	135	1377	206	1502	
090.2B/2x3	692	585	180000	142800	21.2	14.2	D / D	64	58	135	1564	237	1819	
090.2A/2x4	835	727	223200	183200	28.6	19.2	E / D	66	60	135	1822	259	2003	
090.2B/2x4	941	797	240000	190400	28.3	19.0	D / D	66	60	135	2078	315	2425	
090.2A/2x5	1057	920	279000	223000	35.8	24.0	E / D	66	60	135	2282	324	2504	
090.2B/2x5	1184	1004	300000	238000	35.4	23.7	D / D	66	60	135	2621	386	3031	
090.2A/2x6	1271	1109	334800	274800	43	28.8	E / D	67	61	135	2735	383	3005	