

Güntner GGHN 080.2H/27-AND50/12P.E

Specifications

Marca	Güntner
Tipo	GGHN 080.2H/27-AND50/12P.E
Capacidad kW	118,6
Refrigerante	Glycol
Número de aficionados	2
Fan del Espacio in mm	7
Descongelación	Electric
m³/h	34.420
Tamaños	3980x880x1260 mm (LxWxH)
Comentarios	Y.o.b. 2009
Volume	110 dm³
Peso	531 kg
Stock	1





Description

Used Güntner GGHN 080.2H/27-AND50/12P.E

Used and in good condition Güntner GGHN 080.2H/27-AND50/12P.E evaporator. Electric defrosting in the diptray. Complete with 2 Zielh-Abegg fans 50 Hz - 1,03/0,4 kW - 890/650 RPM - diameter 800 mm.

*All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

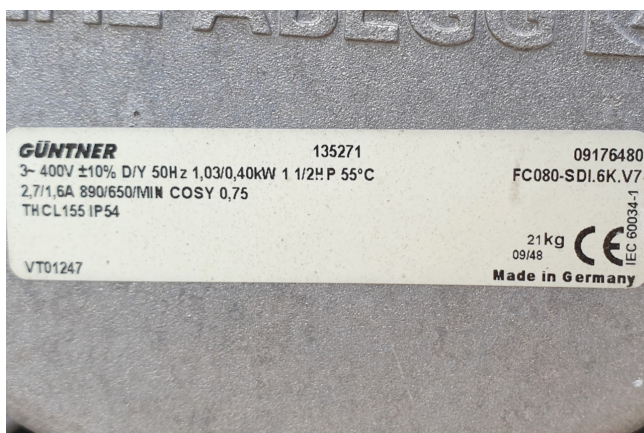

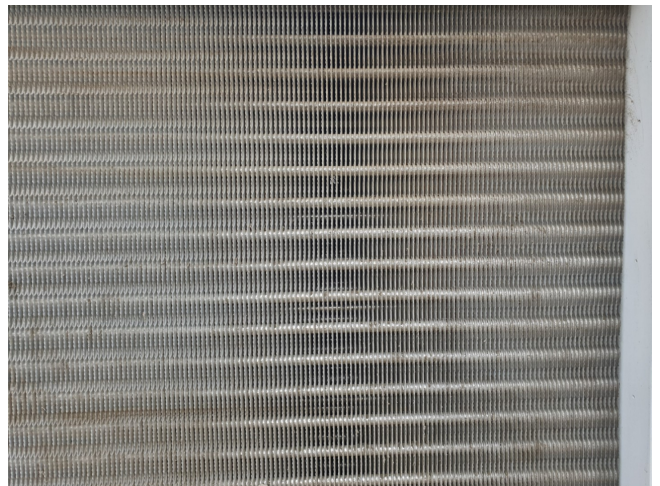



		GGHN - 2 Ventilatoren - 2 Fans																					
Typ	Type	$t_i = -3\text{ }^{\circ}\text{C}$; $d_p = 0.8\text{ bar}$; Glykol 25% $t_i = 10\text{ }^{\circ}\text{C}$ bei 85% r.F. glycol 25% $t_i = 10\text{ }^{\circ}\text{C}$ at 85% relative humidity																					
		Leistung Capacity	Volumenstrom Volume flow rate	Schleusent Brine outlet	Fläche Surface	Luftvolumenstrom Air volume flow	Wirkweite ohne Streamer Air throw without Streamer	Wirkweite mit Streamer Air throw with Streamer	Schalldruck Sound pressure	Ein Inlet	Aus Outlet	Block Coil	Topfwanne Drip tray	Gesamt Total	Anschlussschema Connection diagram	400 V	El. Abtauheizung El. defrost	El. Abtauheizung El. defrost	El. Abtauheizung El. defrost	El. Abtauheizung El. defrost			
		kW	m ³ /h	°C	m ²	m ³ /h	m	m	dB(A)/m	mm Ø	mm Ø	mm Ø	W	W	kW	kW	kW	kW	kW				
040.2D/24-ANW50		17.4	4.7	0.3	65.4	6120	12	27	55	35.0	35.0	3750	1200	4.95	1 x A	0.43	1 x E	1 x E	1 x E				
040.2F/24-ANW50		18.2	2.5	3.7	98.0	9620	11	26	55	35.0	35.0	6250	1700	7.95	1 x B	0.44	1 x E	1 x E	1 x E				
040.2D/24-ANW50		23.8	3.8	2.7	102.6	10220	17	36	59	35.0	35.0	4500	2300	6.80	1 x B	0.99	1 x E	1 x E	1 x E				
045.2D/24-ANW50		30.7	6.3	1.4	128.3	9720	16	35	59	42.0	42.0	6000	2300	8.30	1 x B	1.01	1 x E	1 x E	1 x E				
050.2D/24-ANW50		29.6	5.0	2.4	134.5	13300	21	41	59	42.0	42.0	7000	2400	9.40	1 x B	1.03	1 x I	1 x I	1 x I				
050.2E/24-ANW50		38.8	6.9	2.1	165.2	12940	21	39	59	54.0	54.0	8750	2400	11.15	1 x B	1.05	1 x I	1 x I	1 x I				
050.2F/24-ANW50		43.5	7.9	2.0	201.8	12600	20	37	59	54.0	54.0	10500	3600	14.10	1 x B	1.07	1 x I	1 x I	1 x I				
071.2D/24-ANW50		54.5	8.6	2.7	235.3	23520	35	64	57	54.0	54.0	12500	4500	17.00	2 x C	1.59	2 x G	2 x G	2 x G				
071.2E/24-ANW50		64.7	10.6	2.6	294.1	22460	35	63	57	54.0	54.0	15000	4500	19.50	2 x C	1.61	2 x G	2 x G	2 x G				
071.2F/24-ANW50		73.9	12.5	2.4	352.9	21580	34	61	57	54.0	54.0	17500	4500	22.00	2 x C	1.64	2 x G	2 x G	2 x G				
080.2D/24-ANW50		90.1	16.5	2.0	369.0	35940	43	75	66	64.0	64.0	18000	6000	24.00	2 x C	2.69	2 x G	2 x G	2 x G				
080.2E/24-ANW50		108.5	20.6	1.8	461.3	34560	42	73	66	76.1	76.1	24000	6000	30.00	3 x C	2.71	2 x G	2 x G	2 x G				
080.2F/24-ANW50		123.1	24.7	1.5	553.6	33440	41	71	66	88.9	88.9	27000	6000	33.00	3 x C	2.72	2 x G	2 x G	2 x G				
040.2F/27-ANW50		15.7	2.5	2.8	57.7	6200	13	27	55	35.0	35.0	6250	1700	7.95	1 x B	0.43	1 x E	1 x E	1 x E				
045.2H/27-ANW50		21.5	4.6	1.2	76.9	5860	12	26	55	42.0	42.0	7500	1700	9.20	1 x B	0.43	1 x E	1 x E	1 x E				
045.2E/27-ANW50		23.9	4.8	1.6	75.5	10640	17	39	59	42.0	42.0	6000	2300	8.30	1 x B	0.98	1 x E	1 x E	1 x E				
045.2F/27-ANW50		28.0	5.7	1.5	90.6	10380	16	38	59	42.0	42.0	7500	3450	10.95	1 x B	0.99	1 x E	1 x E	1 x E				
045.2H/27-ANW50		34.9	7.6	1.2	120.8	9680	16	36	59	54.0	54.0	10500	3450	13.95	1 x B	1.01	1 x E	1 x E	1 x E				
050.2F/27-ANW50		35.1	6.3	2.1	118.7	13400	22	41	59	54.0	54.0	10500	3600	14.10	1 x B	1.01	1 x I	1 x I	1 x I				
050.2H/27-ANW50		41.6	6.6	2.7	158.3	12840	21	39	59	54.0	54.0	15750	3600	19.35	2 x B	1.05	1 x I	1 x I	1 x I				
071.2E/27-ANW50		49.7	7.7	2.9	173.0	24400	35	65	57	54.0	54.0	15000	4500	19.50	2 x C	1.56	2 x G	2 x G	2 x G				
071.2F/27-ANW50		53.1	6.9	3.9	207.6	23780	35	64	57	54.0	54.0	17500	4500	22.00	2 x C	1.59	2 x G	2 x G	2 x G				
071.2H/27-ANW50		80.3	17.3	1.2	276.8	22380	35	61	57	76.1	76.1	22500	4500	27.00	2 x C	1.61	2 x G	2 x G	2 x G				
080.2E/27-ANW50		79.8	13.3	2.5	271.3	37040	44	76	66	64.0	64.0	24000	6000	30.00	3 x C	2.66	2 x G	2 x G	2 x G				
080.2F/27-ANW50		94.0	15.9	2.4	325.6	36340	43	75	66	76.1	76.1	27000	6000	33.00	3 x C	2.68	2 x G	2 x G	2 x G				
080.2H/27-ANW50		118.6	21.2	2.1	434.2	34420	42	73	66	88.9	88.9	36000	6000	42.00	4 x C	2.71	2 x G	2 x G	2 x G				
040.2F/210-ANW50		13.5	2.5	2.0	41.6	6420	14	28	55	35.0	35.0	6250	1700	7.95	1 x B	0.42	1 x E	1 x E	1 x E				