

Güntner S-GGHN 071.2H/27-AND50

Specifications

Marca	Güntner
Tipo	S-GGHN 071.2H/27-AND50
Capacidad kW	80,3
Refrigerante	Glycol
Número de aficionados	2
Fan del Espacio in mm	7
Descongelación	None
Tamaños	3500x980x970 mm (LxWxH)
Comentarios	Y.o.b. 2009
Volume	72 dm ³
Peso	387 kg.
Stock	2





Description

Used Güntner S-GGHN 071.2H/27-AND50

Used and in good condition Güntner S-GGHN 071.2H/27-AND50 evaporator. Complete with 2 Ziehl-Abegg fans 50 Hz - 0,68/0,31 kW - 900/690 RPM - diameter 710 mm.

*All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

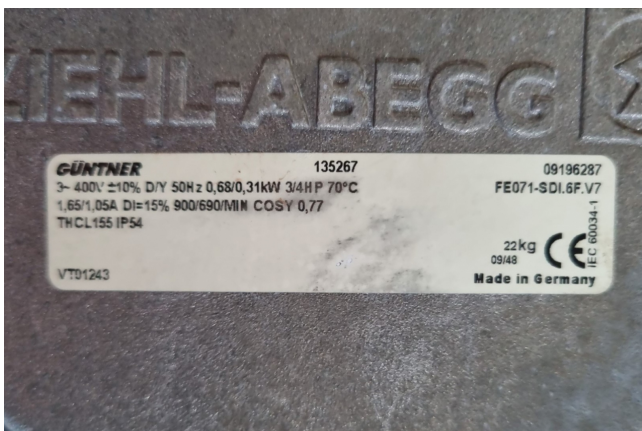

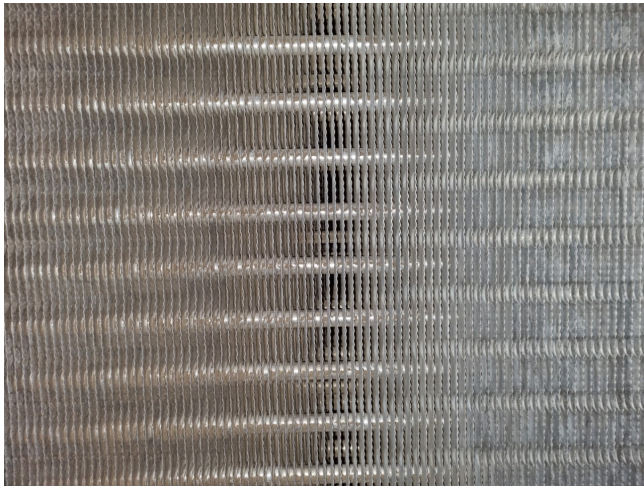

		GGHN - 2 Ventilatoren - 2 Fans																			
Typ	Type	$t_1 = -3\text{ °C}; d_0 = 0.8\text{ bar};$ Glykol 25%; $t_1 = 10\text{ °C}$ bei 85% r.F. glycol 25%; $t_1 = 10\text{ °C}$ at 85% relative humidity																			
		Leistung Capacity	Volumenstrom Volume flow rate	Soleinsatz Brine outlet	Fläche Surface	Luftvolumenstrom Air volume flow	Wärteleistung ohne Steuermittel Air flow without Steuermittel	Wärteleistung mit Steuermittel Air flow with Steuermittel	Schalldruck Sound pressure	Kältebrücken / Sole Coolant / Brine	Ein Inlet	Aus Outlet	Black Coil	Verbaureine Drop line	Reinigt Rinse	Anschlussschema Connection diagram	400 V	EL Abtauheizung El defrost	EL Aufgenommene el. Leistung power consumption	Anschlussschema optionale connection terminals optional	Rinse Rinse
040.2D/24-ANW50		17,4	4,7	0,3	65,4	6120	12	27	55	35,0	35,0	3750	1200	4,95	1 x A	0,43	1 x E				
040.2F/24-ANW50		18,2	2,5	3,7	98,0	5620	11	26	55	35,0	35,0	6250	1700	7,95	1 x B	0,44	1 x E				
045.2D/24-ANW50		23,8	3,8	2,7	102,6	10220	17	36	59	35,0	35,0	4500	2300	6,80	1 x B	0,99	1 x E				
045.2E/24-ANW50		30,7	6,3	1,4	128,3	9720	16	35	59	42,0	42,0	6000	2300	8,30	1 x B	1,01	1 x E				
050.2D/24-ANW50		29,6	5,0	2,4	134,5	13300	21	41	59	42,0	42,0	7000	2400	9,40	1 x B	1,03	1 x E				
050.2E/24-ANW50		38,8	6,9	2,1	168,2	12940	21	39	59	54,0	54,0	8750	2400	11,15	1 x B	1,05	1 x E				
050.2F/24-ANW50		43,5	7,9	2,0	201,8	12600	20	37	59	54,0	54,0	10500	3600	14,10	1 x B	1,07	1 x E				
071.2D/24-ANW50		54,5	8,6	2,7	235,3	23520	35	64	57	54,0	54,0	12500	4500	17,00	2 x C	1,59	2 x G				
071.2E/24-ANW50		64,7	10,6	2,6	294,1	22460	35	63	57	54,0	54,0	15000	4500	19,50	2 x C	1,61	2 x G				
071.2F/24-ANW50		73,9	12,5	2,4	352,9	21580	34	61	57	64,0	64,0	17500	4500	22,00	2 x C	1,64	2 x G				
080.2D/24-ANW50		90,1	16,5	2,0	369,0	35940	43	75	66	64,0	64,0	18000	6000	24,00	2 x C	2,69	2 x G				
080.2E/24-ANW50		108,5	20,6	1,8	461,3	34560	42	73	66	76,1	76,1	24000	6000	30,00	3 x C	2,71	2 x G				
080.2F/24-ANW50		123,1	24,7	1,5	553,6	33440	41	71	66	88,9	88,9	27000	6000	33,00	3 x C	2,72	2 x G				
040.2F/27-ANW50		15,7	2,5	2,8	57,7	6200	13	27	55	35,0	35,0	6250	1700	7,95	1 x B	0,43	1 x E				
040.2H/27-ANW50		21,5	4,5	1,2	76,9	5860	12	26	55	42,0	42,0	7500	1700	9,20	1 x B	0,43	1 x E				
045.2E/27-ANW50		23,9	4,8	1,6	75,5	10640	17	39	59	42,0	42,0	6000	2300	8,30	1 x B	0,98	1 x E				
045.2F/27-ANW50		28,0	5,7	1,5	90,6	10380	16	38	59	42,0	42,0	7500	3450	10,95	1 x B	0,99	1 x E				
045.2H/27-ANW50		34,9	7,6	1,2	120,8	9680	16	36	59	54,0	54,0	10500	3450	13,95	1 x B	1,01	1 x E				
050.2F/27-ANW50		35,1	6,3	2,1	118,7	13400	22	41	59	54,0	54,0	10500	3600	14,10	1 x B	1,01	1 x E				
050.2H/27-ANW50		41,6	6,6	2,7	158,3	12840	21	39	59	54,0	54,0	15750	3600	19,35	2 x B	1,05	1 x E				
071.2E/27-ANW50		49,7	7,7	2,9	173,0	24400	35	65	57	54,0	54,0	15000	4500	19,50	2 x C	1,56	2 x G				
071.2F/27-ANW50		53,1	6,9	3,9	207,6	23780	35	64	57	54,0	54,0	17500	4500	22,00	2 x C	1,59	2 x G				
071.2H/27-ANW50		80,3	12,3	3,2	276,8	22380	35	61	57	76,1	76,1	22500	4500	27,00	2 x C	1,61	2 x G				
080.2E/27-ANW50		79,8	13,3	2,5	271,3	37040	44	76	66	64,0	64,0	24000	6000	30,00	3 x C	2,66	2 x G				
080.2F/27-ANW50		94,0	15,9	2,4	325,6	36340	43	75	66	76,1	76,1	27000	6000	33,00	3 x C	2,68	2 x G				
080.2H/27-ANW50		118,6	21,2	2,1	434,2	34420	42	73	66	88,9	88,9	36000	6000	42,00	4 x C	2,71	2 x G				
040.2F/210-ANW50		13,5	2,5	2,0	41,6	6420	14	28	55	35,0	35,0	6250	1700	7,95	1 x B	0,42	1 x E				
040.2H/210-ANW50		17,3	3,3	1,8	55,4	6120	13	27	55	35,0	35,0	7500	1700	9,20	1 x B	0,43	1 x E				

GGHN - 2 Ventilatoren - 2 Fans														Abmaße G-Gewinde flach- dichtend Drain G-thread flat sealing DIN-ISO 228-1
Typ	Type	Drain Gewinde flach- dichtend Drain G-thread flat sealing DIN-ISO 228-1	Nettogewicht Net weight	Abmessungen Dimensions										
				L	B	H	E	F	C	M	S	A		
		I	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	K	
040.2D/24-ANW50		10,6	75	1770	540	550	1360	425	210	870	580	400	G1¼"	
040.2F/24-ANW50		15,9	101	1770	815	560	1360	700	210	870	855	400	G1¼"	
045.2D/24-ANW50		16,2	97	2250	665	650	1780	545	240	970	700	500	G1¼"	
045.2E/24-ANW50		20,2	121	2250	665	650	1780	545	240	970	700	500	G1¼"	
050.2D/24-ANW50		21,0	131	2470	645	750	2000	545	240	1070	700	550	G1¼"	
050.2E/24-ANW50		24,7	150	2470	645	750	2000	545	240	1070	700	550	G1¼"	
071.2D/24-ANW50		31,4	184	2470	825	760	2000	700	240	1070	855	550	G1¼"	
071.2E/24-ANW50		35,7	313	3460	900	955	2720	715	380	1350	885	700	G2"	
071.2F/24-ANW50		44,7	342	3460	900	955	2720	715	380	1350	885	700	G2"	
080.2D/24-ANW50		53,6	392	3460	1050	965	2720	865	380	1350	1040	700	G2"	
080.2E/24-ANW50		55,5	424	3960	910	1250	3200	715	380	1650	890	700	G2"	
080.2F/24-ANW50		69,3	470	3950	910	1250	3200	715	380	1650	890	700	G2"	
080.2F/24-ANW50		83,2	580	3950	1060	1260	3200	865	380	1650	1040	700	G2"	
040.2F/27-ANW50		15,9	92	1770	815	560	1360	700	210	870	855	400	G1¼"	
045.2E/27-ANW50		21,2	100	1770	815	560	1360	700	210	870	855	400	G1¼"	
045.2F/27-ANW50		20,2	108	2250	665	650	1780	545	240	970	700	500	G1¼"	
045.2H/27-ANW50		24,3	125	2250	815	660	1780	700	240	970	850	500	G1¼"	
050.2F/27-ANW50		32,3	138	2250	815	660	1780	700	240	970	850	500	G1¼"	
050.2H/27-ANW50		29,9	154	2470	825	760	2000	700	240	1070	855	550	G1¼"	
050.2H/27-ANW50		41,9	184	2470	825	760	2000	700	240	1070	855	550	G1¼"	
071.2E/27-ANW50		44,7	279	3460	900	955	2720	715	380	1350	885	700	G2"	
071.2F/27-ANW50		53,6	357	3460	1050	965	2720	865	380	1350	1040	700	G2"	
071.2H/27-ANW50		71,5	387	3460	1050	965	2720	865	380	1350	1040	700	G2"	
080.2E/27-ANW50		69,3	425	3950	910	1250	3200	715	380	1650	890	700	G2"	
080.2F/27-ANW50		83,2	483	3950	1060	1260	3200	865	380	1650	1040	700	G2"	
080.2H/27-ANW50		111,0	531	3950	1060	1260	3200	865	380	1650	1040	700	G2"	
040.2F/210-ANW50		15,9	88	1770	815	560	1360	700	210	870	855	400	G1¼"	