

Goedhart DRS 42508

Specifications

Marca	Goedhart
Tipo	DRS 42508
Capacidad kW	15,5*
Refrigerante	NH 3 (ammonia)
Número de aficionados	2
Fan del Espacio in mm	8
Descongelación	None
m³/h	10.280 m³/h
Tamaños	2420x1500x520 mm (LxWxH)
Comentarios	Y.O.B. 2001
Remarks	* the capacitie based on evaporating temperature -4°C and Air temperature in/out +4°C
Volume	25 dm³
Stock	1






Description

Used Goedhart DRS 42508

Used Goedhart DRS 42508 evaporator. The height of the aircooler is low, so the maximum space in the chill room can be utilised. The fans are arranged for blow-through or draw-through air configuration. The evaporator has a total airflow of 14.855 m³/h and a volume of 25 dm³. Complete with 2 Woods 500 mm airfans with a rotation of 900 RPM. * the capacitie based on evaporating temperature -4°C and Air temperature in/out +4°C

*All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.

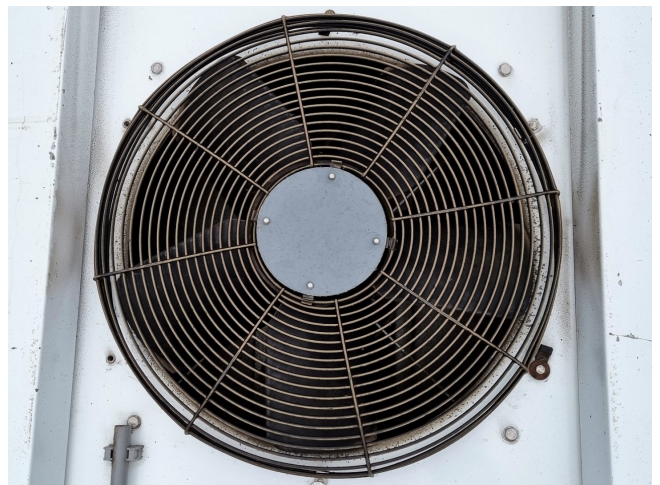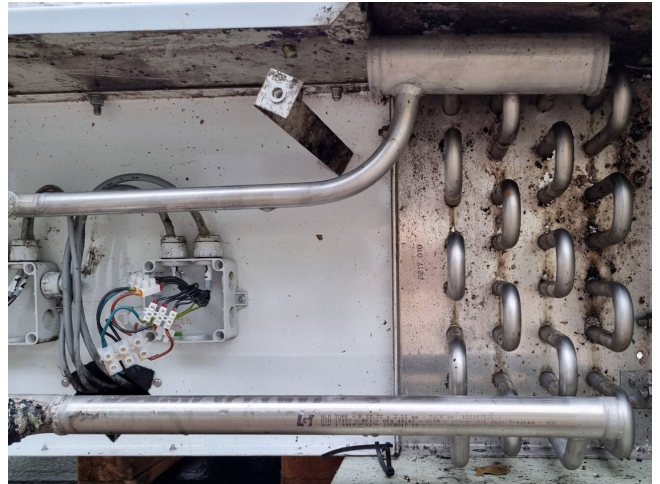

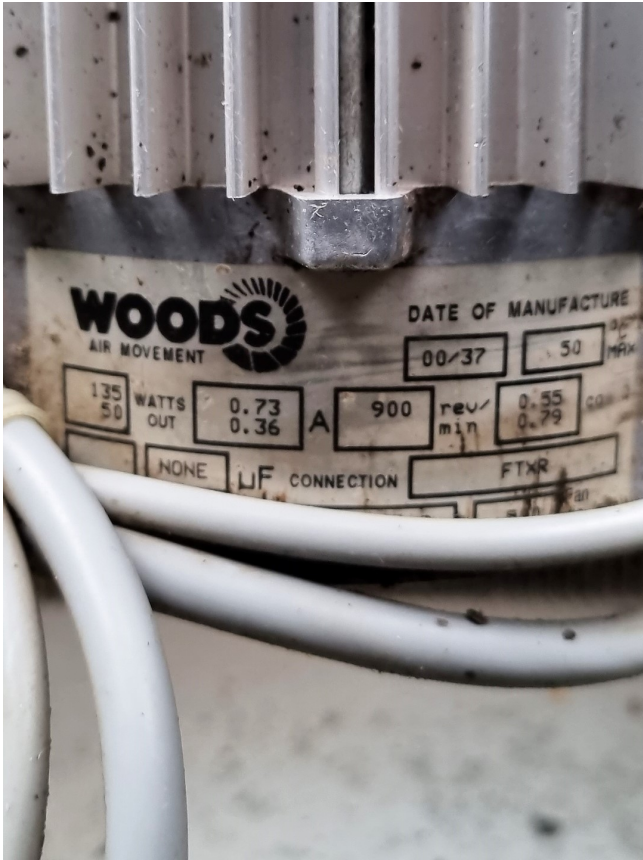

6 De koel- en vriescellen.

De koeler blokken van de koelers voor de koel- en vriescellen zijn worden uitgevoerd met buizen in RVS 304, 16 mm uitw. en aluminium lamellen. De buissteek is 50 x 50 mm. De omkasting, de afschermkappen voor de bochten en de lekbak is van sendzimir gegalvaniseerde staalplaat welke in de kleur wit wordt afgewerkt.

6.1 Vier dubbelzijdig uitblazende koelers t.b.v. de expeditie.

Technische gegevens per koeler.

Fabrikaat	: Goedhart.	
Type	: DRS 42508.	
Kapaciteit	: 15,5	kW.
Verdampingstemperatuur	: -4	°C.
Luchttemperatuur in/uit	: 4/1,1	°C.
VQ	: 68	%.
Rijplagdikte	: 0,5	mm.
Luchthoeveelheid	: 10.280	m³/h.
Aantal ventilatoren	: 2	stuks.
Toerental ventilatoren	: 900	omw./min.