

Sabroe Chillpac 108ER

Specifications

Brand	Sabroe
Tipo	Chillpac 108ER
Product type	Water Cooled Chiller
Capacidad kW	363,0
Capacity Tons	103,2
Refrigerante	NH 3 (ammonia)
Tipo de Refrigerante	R717
Sizes	3500x1050x1900 mm (LxWxH)
Compressor(s) type & model	Sabroe SMC 108E
Display	Sabroe UNISAB 2
Remarks	Y.o.b. 2006
Stock	2



Description

Used Sabroe Chillpac 108ER

Used Sabroe Chillpac 108ER water cooled chiller on R717 (Ammonia). Complete with 1 Sabroe SMC 108E reciprocating compressor, Schorch DN7315S-BB81P-Z electric motor - 50 Hz - 132 kW - 1480 RPM, Sabroe ESRA 703401 evaporator with a volume of 172 dm³ (R717/Ammonia) and 40 dm³ (Glycol), Sabroe CRRD 80 as condenser with a volume of 166 dm³ (R717/Ammonia) and 28 dm³ (Glycol), control cabinet and a UNISAB 2 controller.


*All components of this used chiller will be tested and in good working, leak-free condition (condensing blocks, compressors, fans, control panel, etc.). Choosing HOS BV means buying with warranty. We perform an industrial cleaning and rust spots will be covered.





**Your partner for used commercial and
industrial refrigeration equipment**

Also, we can arrange your shipment.



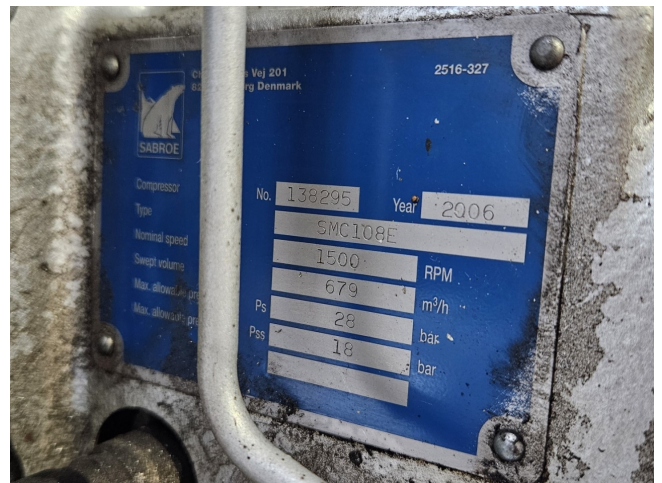

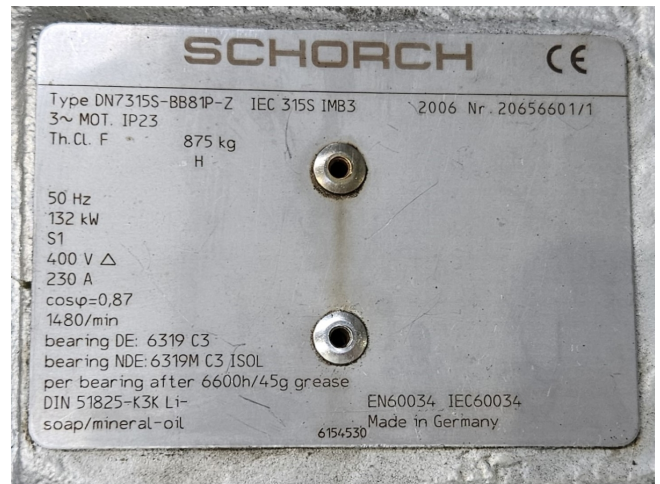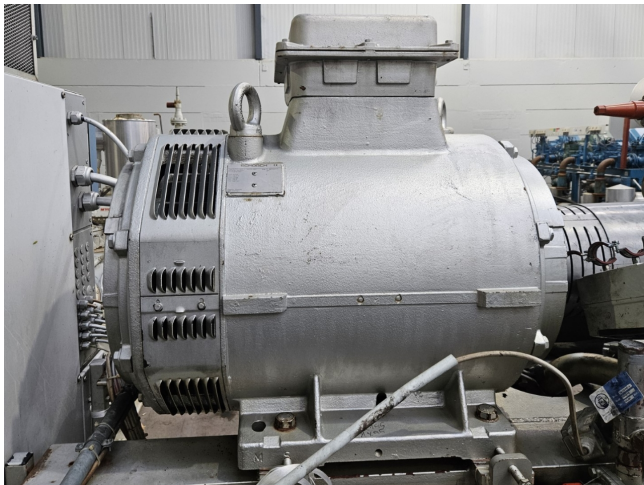



 Christian X's vej 201 Box 1810 DK-8270 Højbjerg, Danmark www.Sabroe.com	
YORK ORDER NO.	243034
YORK DRWG NO.	243034-01 132kW
SWITCHBOARD FACTORY	eegholm
EEGHOLM PLANT NO.	ROT243034-01/62571
DATE	15-12-2006
RATED VOLTAGE	3 x 400 V
RATED FREQUENCY	50 Hz
ON LOAD CURRENT	257 A
CURRENT HIGHEST	256 A
MAX. BACK-UP FUSE gG/gL	315 A
BACK-UP CIRCUIT BREAKER	NS320N
Ik MAX./MIN	45 / 5 kA
Ik PEAK	94 kA
ENCLOSURE IP CLASS	IP 54
EARTHING SYSTEM	TNS
MAX. AMBIENT TEMPERATURE	40 C
www.eegholm.dk Tel. +45 73121212	

 Christian X's vej 201 Box 1810 DK-8270 Højbjerg, Danmark www.Sabroe.com	
YORK ØRDER NO.	243034
YORK DRWG NO.	243034-01 132kW
SWITCHBOARD FACTORY	eegholm
EEGHOLM PLANT NO.	ROT243034-01/62571
DATE	15-12-2006
RATED VOLTAGE	3 x 400 V
RATED FREQUENCY	50 Hz
ON LOAD CURRENT	257 A
CURRENT HIGHEST	256 A
MAX. BACK-UP FUSE gG/gL	315 A
BACK-UP CIRCUIT BREAKER	NS320N
Ik MAX./MIN	45 / 5 kA
Ik PEAK	94 kA
ENCLOSURE IP CLASS	IP 54
EARTHING SYSTEM	TNS
MAX. AMBIENT TEMPERATURE	40 C
www.eegholm.dk Tel. +45 73121212	

