

Carlyle / Carrier 06TTA356SS1C

Specifications

Marca	Carlyle / Carrier
Tipo	06TTA356SS1C
Refrigerante	Freon
Refrigerant type	R134a
kW at +10°C/+40°C	528,0 (+12,8°C/+43,3°C)
kW at 0°C/+40°C	358,8 (+1,7°C/+43,3°C)
kW at -5°C/+40°C	287,7 (-3,9°C/+43,3°C)
kW at -10°C/+40°C	225,2 (-9,4°C/+43,3°C)
Control de capacidad	✓
Sober Bancada	✓
Recipiente de líquido	✓
Recipiente de líquido ltr.	155
La línea de líquido filtro secador	✓
Valvula Solenoide	✓
m ³ / h	597
Tamaños	1500x1350x620 mm (LxWxH)
Stock	1





Description

Used Carlyle / Carrier 06TTA356SS1C

Used Carlyle / Carrier 06TTA356SS1C semi-hermetic screw compressor on Freon type R134a. The compressor has a displacement of 597 m³/h at 2900/3500 RPM. Complete with Mecasem Sas 00PSG000838700B liquid receiver a 155 liters and liquid line filters drier.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *If requested we are happy to arrange your logistics.

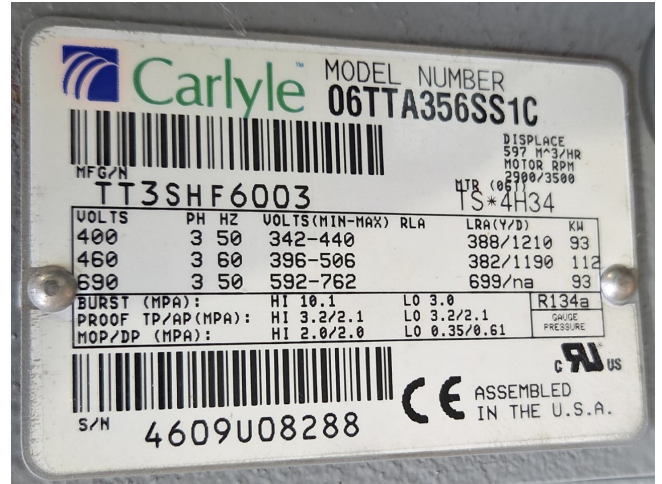

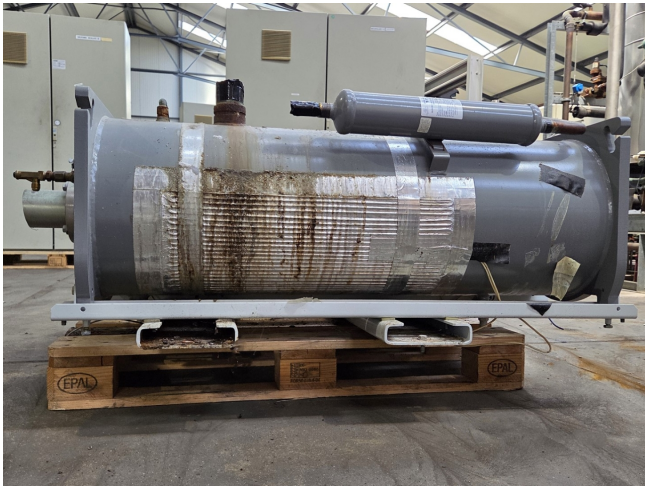

MBCASSINI S.A.S Constructeur 67540 OSTWALD FRANCE

CE N° Organisme Notifié: 0036 N° de Série: 2080

Notified Body: 0036 Serial Nr.: 2080

Zuständige Prüfstelle: 0036 Seriennummer: 2080

Type: 00PSG0008387008 Date d'épreuve: 2010

Typ: 00PSG0008387008 Test date: 2010

Fluide Fluid	Pression de service Max/Min Bar Working pressure Max/Min Bar Betriebsdruck Max/Min Bar	Température de service Min/Max °C Working temperature Min/Max °C Betriehtemperatur Min/Max °C	Volume (L) Inhalt (L)	Pression d'épreuve (Bar) Test Pressure (Bar) Prüfdruck (Bar)
Enveloppe Schal/Mantel R134A + OIL	-1 / 21	-20 / +100 °C	155	31,3
Enveloppe Schal/Mantel R134A + OIL	2 / 21	0 / +100 °C	155	31,3

CATEGORIE: IV
Poids: 155 kg
Gewicht: 155 kg

