


Bock F5 (X2) Cool/freeze installation

Specifications

Marca	Bock
Tipo	F5 (X2) Cool/freeze installation
Refrigerante	Freon
kW at +10°C/+40°C	166.66
kW at 0°C/+40°C	118.80
kW at -5°C/+40°C	98.30
kW at -10°C/+40°C	80.02
kW at -20°C/+40°C	49.88
kW at -30°C/+40°C	27.96
kW at -40°C/+40°C	13.78
kW at -45°C/+40°C	9.44
Sober Bancada	✓
Presostatos	✓
Manómetros de Presion	✓
Recipiente de líquido	✓
Separador de aceite	✓
La línea de líquido filtro secador	✓
Mirilla	✓
Comentarios	# // Electromotor: 11 kW at 1445 RPM // Pulley EM: 180 / Pulley Compr: 230
Comentarios	R404a - R22 or other freon types
Package / Rack	✓

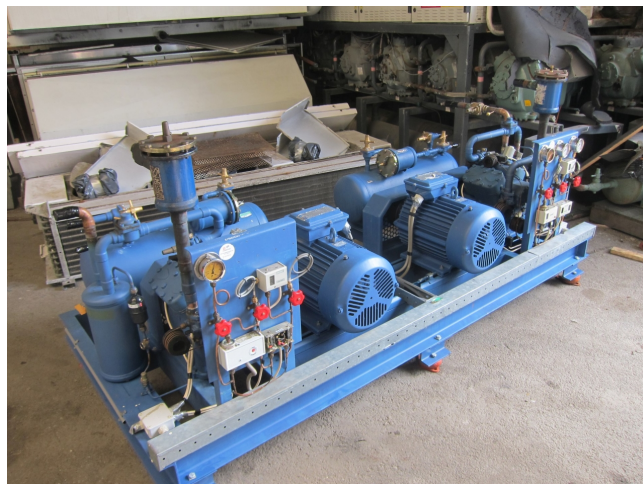

Tamaños	2500x1100x1200 mm (LxWxH)
---------	------------------------------

Stock	1
-------	---



Description


Used Bock F5 (X2) Cool/freeze installation

Used Bock F5 (X2) cool/freeze installation, complete with pressure safety switches, pressure gauges, liquid receiver, oil separator, liquid line filter and sight glass.

Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.

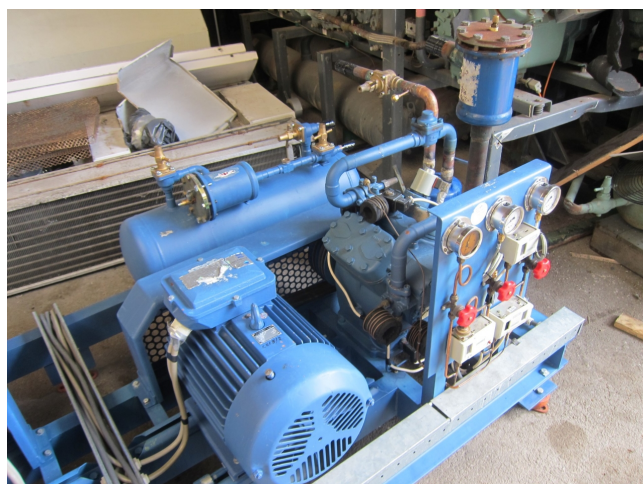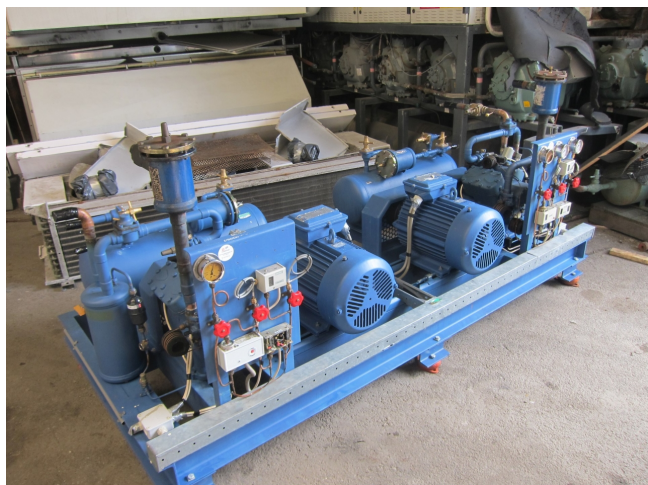

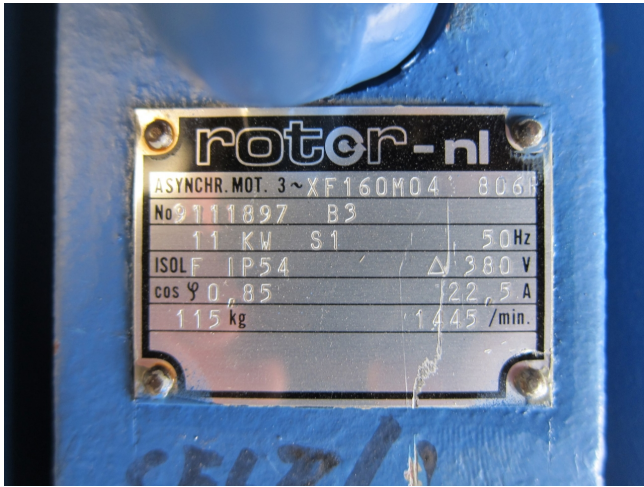

R404A/R507		Performance data												1.450 rpm	
Type	Cond. temp. °C	Cooling capacity		Q ₀ [W]		Power P [kW]									
		Evaporating temperature °C													
		10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45		
FX2	30	Q 13423	11418	9621	8020	6606	5366	4290	3366	2584	1933	1402	979		
	40	P 2,21	2,19	2,13	2,05	1,94	1,80	1,65	1,48	1,31	1,12	0,94	0,75		
	50	Q 11561	9785	8201	6797	5562	4485	3555	2761	2092	1537	1085	724		
	60	P 2,65	2,56	2,44	2,30	2,13	1,95	1,76	1,55	1,34	1,12	0,91	0,70		
FX3	30	Q 9652	8113	6749	5548	4500	3593	2816	2159	1609	1157	791			
	40	P 3,03	2,88	2,71	2,51	2,20	2,07	1,83	1,59	1,34	1,10	0,86			
	50	Q 28402	24165	20377	17011	14041	11442	9187	7251	5608	4231	3096	2175		
	60	P 3,92	3,97	3,84	3,63	3,36	3,04	2,67	2,28	1,86	1,43	1,00	0,70		
FX4	30	Q 24498	20763	17437	14495	11911	9657	7710	6042	4628	3442	2458	1650		
	40	P 4,97	4,85	4,66	4,41	4,11	3,77	3,40	3,01	2,61	2,21	1,83	1,46		
	50	Q 20584	17356	14408	11985	9791	7889	6254	4860	3680	2690	1862			
	60	P 5,90	5,62	5,28	4,89	4,47	4,02	3,56	3,08	2,61	2,15	1,72			
FX5	30	Q 53909	45836	38585	32117	26393	21373	17019	13292	10151	7559	5476	3862		
	40	P 8,34	8,30	8,09	7,73	7,25	6,68	6,04	5,36	4,66	3,96	3,29	2,69		
	50	Q 46772	39538	33069	27326	22270	17862	14063	10834	8135	5928	4173	2832		
	60	P 10,09	9,75	9,27	8,67	7,98	7,21	6,41	5,59	4,78	4,00	3,27	2,63		
FX14/1166	30	Q 39157	32814	27179	22214	17880	14137	10946	8268	6064	4295	2922			
	40	P 11,44	10,83	10,10	9,28	8,40	7,47	6,53	5,59	4,69	3,85	3,09			
	50	Q 29454	24844	20253	16784	13620	10922	8353	6264	4628	3348	2305	1550		
	60	P 12,98	12,48	11,85	11,24	10,62	10,00	9,38	8,75	8,12	7,50	6,87	6,25		
FX14/1366	30	Q 84249	70784	58051	48154	40014	31922	24889	18967	13881	9965	6895	4728		
	40	P 16,87	16,64	16,05	15,16	14,07	12,72	11,28	9,79	8,25	6,65	5,03	3,29		
	50	Q 70427	59251	49183	40194	32258	25345	19428	14480	10472	7377	5168			
	60	P 20,21	19,31	18,12	16,70	15,11	13,41	11,67	9,93	8,26	6,73	5,38			
FX14/166	30	Q 131605	112604	95281	79598	65518	53000	42008	32503	24447	17801	12527	8587		
	40	P 17,86	18,55	18,64	18,22	17,37	16,17	14,71	13,06	11,32	9,55	7,85	6,29		
	50	Q 114650	97388	81277	67628	55054	43966	34326	26096	19217	13711	9480	6506		
	60	P 23,21	22,89	22,08	20,86	19,30	17,49	15,52	13,47	11,41	9,43	7,61	6,04		
FX14/166	30	Q 98996	81521	67668	55301	44382	34871	26730	19922	14408	10150	7110			
	40	P 27,80	26,56	24,92	22,97	20,79	18,45	16,05	13,66	11,37	9,25	7,40			
	50	Q 154448	132149	111819	93414	76889	62199	49299	38144	28690	20890	14701	10078		
	60	P 20,96	21,77	21,87	21,38	20,38	18,98	17,26	15,33	13,28	11,21	9,21	7,39		
FX14/1366	30	Q 134550	114291	95912	79366	64609	51597	40284	30625	22575	16091	11125	7635		
	40	P 17,52	17,81	17,81	17,40	16,40	15,00	13,45	11,75	10,00	8,25	6,50	4,75		