

Mycom F2520SSC-51

Specifications

| Mycom |
|-------------------------|
| F2520SSC-51 |
| NH 3 (ammonia) |
| 653,6* |
| 546,5 |
| 311 |
| 250 |
| ✓ |
| ✓ |
| ✓ |
| ✓ |
| ✓ |
| ✓ |
| ✓ |
| # // *Capacity based on |
| -25ºC/+40ºC // |
| Electromotor: 250 kW at |
| 2970 RPM |
| ✓ |
| 5000x2100x3000 mm |
| (LxWxH) |
| (LAVVAII) |
| |



Description

Used Mycom F2520SSC-51

Used Mycom F2520SSC-51 screw compressor unit. This unit has the following components: 1x Electromotor Leroy Somer PLS315L-T (250 kW at 2970 RPM), 1x Mycom M50P oil pump, oil separator and control panel. Compressor unit has run on -45°C/+35°C (300 kW). *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.


































Your partner for used commercial and industrial refrigeration equipment

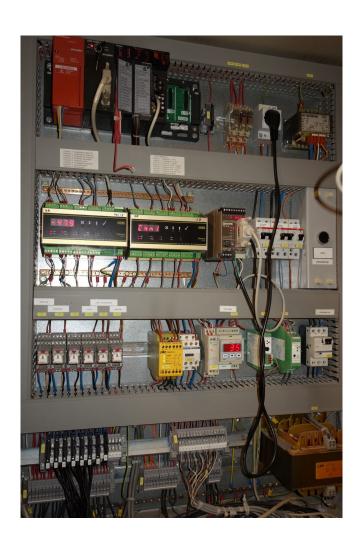







Your partner for used commercial and industrial refrigeration equipment









