

# Refcomp SRC M 340 LB

## Specifications


|                   |                           |
|-------------------|---------------------------|
| Marca             | Refcomp                   |
| Tipo              | SRC M 340 LB              |
| Refrigerante      | Freon                     |
| Refrigerant type  | R407 C or other types     |
| kW at +10°C/+40°C | 371.0                     |
| kW at 0°C/+40°C   | 240.2                     |
| kW at -5°C/+40°C  | 187.9                     |
| kW at -10°C/+40°C | 144.5                     |
| kW at -20°C/+40°C | 109.4                     |
| Mirilla           | ✓                         |
| Peso kg.          | 805                       |
| Tamaños           | 1200x750x660mm<br>(LxWxH) |
| Stock             | 2                         |



## Description

### Used Refcomp SRC M 340 LB

RefComp SRC M 340 LB // This RefComp uses refrigerant R 407 C / kW 135 / 406.4 Vol m<sup>3</sup>/h / N° of cylinders 7

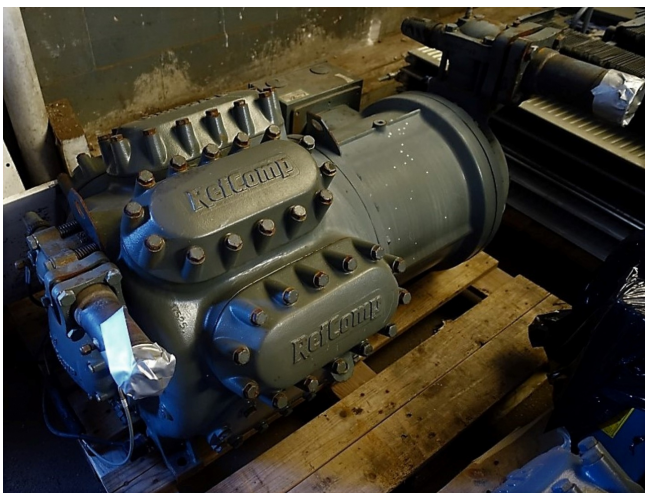

|                                          |                    |                                                             |                                 |                          |
|------------------------------------------|--------------------|-------------------------------------------------------------|---------------------------------|--------------------------|
| <b>RefComp</b><br>Refrigerant Compressor |                    | MODEL                                                       | SRC M 340 - L B                 | Made in Italy            |
|                                          |                    | SER. N.                                                     | 02-1-17525                      | R. - 22                  |
| VOLT / PH / Hz                           | 380 / 415 - 3 - 50 |                                                             | TEST PRESS. HI : 32,5 bar       |                          |
| F.L.A.                                   | A                  | 205                                                         | VOLTAGE<br>LIMITATION<br>± 10 % | DWP HI : 25 bar          |
| L.R.A. P.W.S.                            | A                  | 719 / 785                                                   |                                 | DWP Lo: 16 bar           |
| L.R.A. D.O.L.                            | A                  | 933 / 1019                                                  |                                 | DISPLACEMENT<br>AT 50 Hz |
| OIL<br>Lt.                               | 20.                | MOTOR THERMALLY PROTECTED<br>BY THERMISTOR - TYPE INT 69 TM |                                 | 406,4 m³/h               |

