

Bitzer 2FSL-4K-40S (x2) freeze unit

Specifications


Marca	Bitzer
Tipo	2FSL-4K-40S (x2) freeze unit
Refrigerante	CO2
kW at -30°C/+40°C	29.2 based on -10°C/-30°C
kW at -40°C/+40°C	22 based on -20°C/-40°C
Sober Bancada	✓
Manómetros de Presion	✓
Separador de aceite	✓
Sistema de nivel de aceite	✓
La línea de líquido filtro secador	✓
Package / Rack	✓
Stock	1




Description

Used Bitzer 2FSL-4K-40S (x2) freeze unit

Used but in very good condition Bitzer 2FSL-4K-40S (x2) freeze unit with pressure gauges, oil separator and oil reservoir. For all the other specs, see the picture of the manufacturer model plate or the attached pdf file (if available). *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

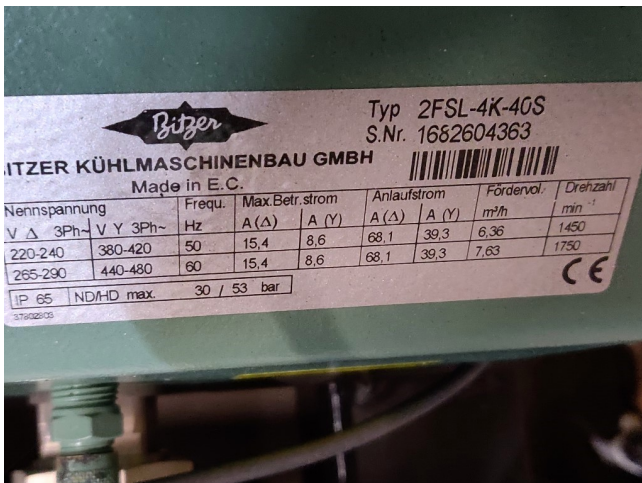

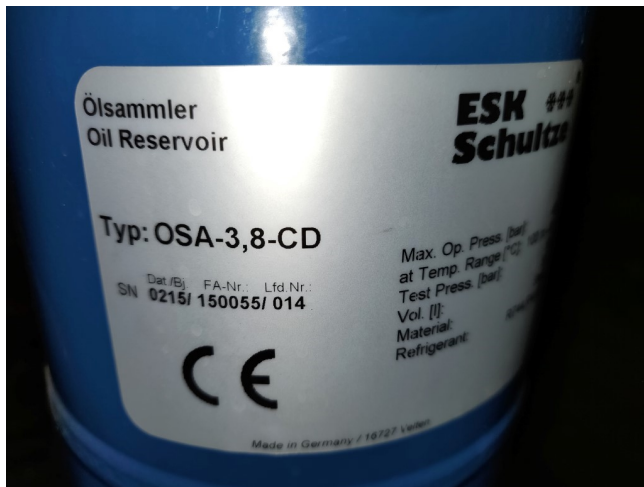

Compressor type Type de compresseur	Condensation temperature Température de condensation [°C]	Kälteleistung Cooling capacity Puissance frigorifique				Leistungsaufnahme Power consumption Puissance absorbée									
		Q ₀ [Watt]		P _e [kW]		Q ₀ [Watt]		P _e [kW]							
Type de compresseur	Température de condensation [°C]	Verdampfungstemperatur °C				Evaporation temperature °C				Température d'évaporation °C					
		-25	-30	-35	-40	-25	-30	-35	-40	-25	-30	-35	-40		
2MSL-05K	-20		2480	1930	1480	1120		0,46	0,48	0,49	0,49	0,47			
	-10	3380	2700	2110	1620	1240	0,53	0,58	0,60	0,59	0,57	0,53			
	-5	3120	2470	1920	1470	1120	0,58	0,63	0,64	0,63	0,61	0,57			
	5	2590	2030	1560	1200	900	0,81	0,81	0,81	0,78	0,74	0,74			
2MSL-07K	-20	2330	1820	1410			0,90	0,98	0,84						
	-10	3440	2850	1900	1400	1470		0,55	0,62	0,64	0,63	0,61	0,52	0,61	
	-5	4520	3600	2810	2140	1540	0,68	0,71	0,71	0,71	0,69	0,67	0,55	0,55	
	5	4110	3270	2540	1920	1400	0,99	0,97	0,92	0,92	0,87	0,82	0,57	0,57	
2MSL-09K	-20	3380	2600	2000	1490		0,89	0,97	0,92	0,76					
	-10	3040	2370	1780			0,99	0,95	0,88						
	-5	4680	3800	2910	2240	1770	1,11	1,17	1,17	1,13	1,05	0,98	0,83	0,83	
	5	7430	5900	4600	3610	2700	1,07	0,90	1,01	1,05	1,04	0,99	0,92	0,92	
2KSL-1K	-20	6790	5420	4240	3240	2600	1,720	1,11	1,17	1,17	1,13	1,05	0,98	0,96	
	-10	5600	4430	3410	2540		1,49	1,46	1,46	1,39	1,29	1,23	1,13	1,06	
	-5	8040	6420	4990	3790		1,66	1,60	1,60	1,49	1,38	1,29	1,23	1,13	
	5	6040	4820	3690	2810		1,66	1,60	1,60	1,49	1,38	1,29	1,23	1,13	
2MSL-2K	-20	9620	7750	6140	4760	3540		1,18	1,29						
	-10	8820	7080	5570	4280	3200	2,320	1,43	1,51	1,52	1,47	1,38	1,26	1,26	
	-5	7290	5790	4490	3380		1,93	1,93	1,96	1,82	1,70				
	5	6560	5180	3970			2,16	2,09							
2MSL-3K	-20		9160	7250	5620					1,21	1,32	1,35	1,33		
	-10	12050	9780	7780	6070	5340	1,44	1,61	1,61	1,68	1,68	1,63	1,52		
	-5	11090	8950	7090	5490	4420	1,78	1,89	1,91	1,96	1,96	1,91	1,75	1,61	
	5	9000	7350	5730	4350		2,42	2,41	2,42	2,32	2,19				
2GSL-3K	-20	8280	6570				2,73	2,66							
	-10		10840	8620	6730	5140				1,40	1,52	1,57	1,55		
	-5	14210	11560	9040	6920	5590	4,180	1,68	1,87	1,96	1,97	1,91	1,79	1,79	
	5	13110	10620	8460	6600	5270	2,07	2,20	2,23	2,19	2,07	1,91	1,79	1,79	
2FSL-4K	-20	10920	8760	6880	5270		2,84	2,84	2,75	2,59					
	-10	9840	7820	6120			3,21	3,14	2,99						
	-5	13700		11020	8700	6740				1,75	1,90	1,96	1,94		
	5	12530	10090	7850	6010					2,10	2,24	2,27	2,51	2,51	2,21
2FSL-4K	-20	16820	13880	10860	8210	6810	4980	2,81	2,78	2,85	2,68	2,59	2,49	2,49	
	-10	13900	11230	8710	6810			3,63	3,60	3,39	3,40				
	-5														
	5	12530	10090	7850				4,13	4,07	3,91					