


# Grundfos TP 100-240/2 A-F-A-GQQE

## Specifications

|                                            |                         |
|--------------------------------------------|-------------------------|
| Marque                                     | Grundfos                |
| Type                                       | TP 100-240/2 A-F-A-GQQE |
| Débit volumique Q max. (m <sup>3</sup> /h) | 94,5                    |
| Hauteur de livraison H max. (m)            | 20,3                    |
| Puissance max. (kW)                        | 7,5                     |
| Stock                                      | 1                       |

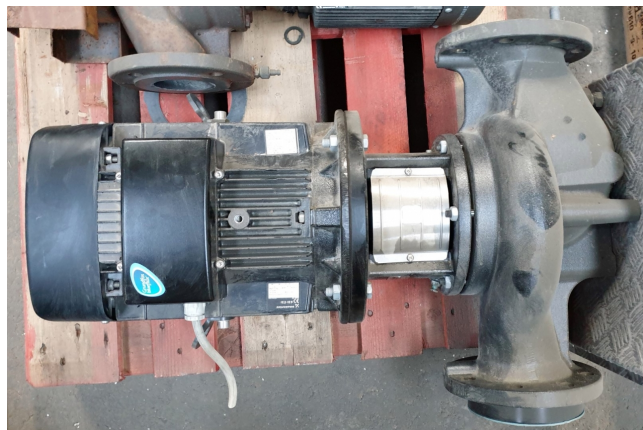

## Description

### Used Grundfos TP 100-240/2 A-F-A-GQQE

Used Grundfos TP 100-240/2 A-F-A-GQQE water pump. With a nominal flow of 94,5 m<sup>3</sup>/h and 2910 RPM. Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the "top-down" design, i.e. the motor, pump head and impeller can be removed for maintenance or service while the pump housing remains in the pipework. The pump is equipped with an unbalanced rubber bellows seal. The pump is equipped with a fan-cooled asynchronous motor.

