


# Bitzer 4T-8.2Y-40P

## Specifications

|                                       |                           |
|---------------------------------------|---------------------------|
| Marque                                | Bitzer                    |
| Le type                               | 4T-8.2Y-40P               |
| Réfrigérant                           | Freon                     |
| kW at -5°C/+40°C                      | 27,1                      |
| kW at -10°C/+40°C                     | 22,3                      |
| kW at -20°C/+40°C                     | 14,6                      |
| kW at -30°C/+40°C                     | 8,9                       |
| kW at -40°C/+40°C                     | 4,8                       |
| Contrôle de capacité                  | ✓                         |
| Interrupteurs de sécurité de pression | ✓                         |
| Système de niveau d'huile             | ✓                         |
| Voyant                                | ✓                         |
| Electrovanne                          | ✓                         |
| m <sup>3</sup> / h                    | 39,4                      |
| Remarques                             | Y.o.b. 2003               |
| Tailles                               | 800x520x700 mm<br>(LxWxH) |
| Stock                                 | 2                         |

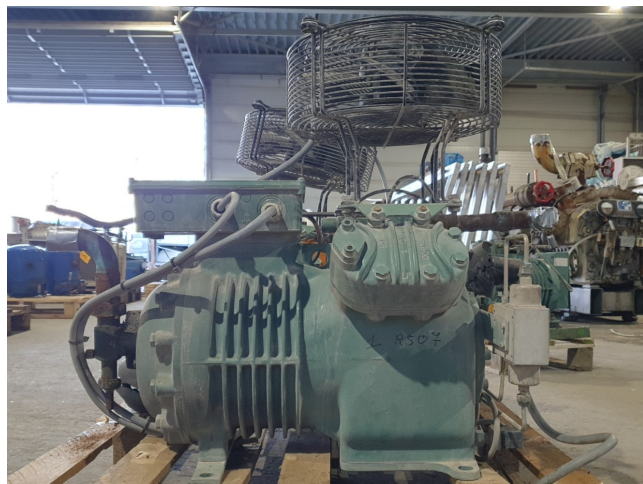

## Description

### Used Bitzer 4T-8.2Y-40P

Used Bitzer 4T-8.2Y-40P semi-hermetic reciprocating compressor on Freon with 1 Ziehl-Abegg fan: 50 Hz - 0,12 kW - 1410 RPM. Complete with a sight glass, capacity control, pressure safety switches, oil level system and a solenoid valve. This unit has a displacement of 39,4 m<sup>3</sup>/h.

\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

\*Optional we can also arrange the logistics.





