


# Bitzer 6G.2

## Specifications

|                      |                            |
|----------------------|----------------------------|
| Marque               | Bitzer                     |
| Le type              | 6G.2                       |
| Réfrigérant          | Freon                      |
| kW at 0°C/+40°C      | 106,2                      |
| kW at -10°C/+40°C    | 72,2                       |
| kW at -20°C/+40°C    | 46,8                       |
| kW at -30°C/+40°C    | 28,2                       |
| kW at -40°C/+40°C    | 15,2                       |
| Contrôle de capacité | ✓                          |
| Séparateur d'huile   | ✓                          |
| Electrovanne         | ✓                          |
| m <sup>3</sup> / h   | 126,8 - 153,0              |
| Weight               | 153                        |
| Tailles              | 1250x700x650 mm<br>(LxWxH) |
| Stock                | 1                          |

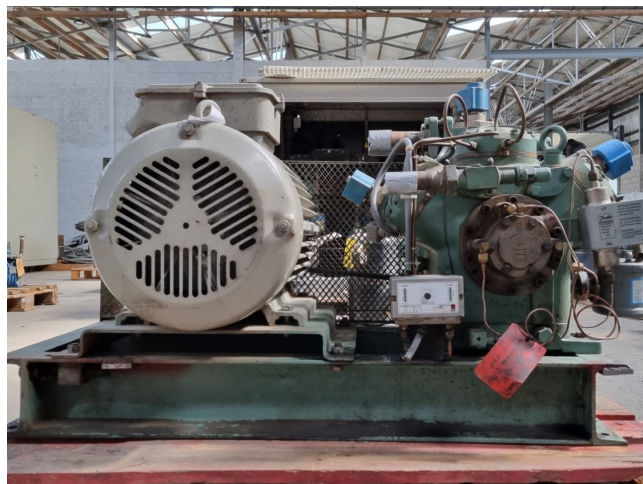

## Description

### Used Bitzer 6G.2

Used Bitzer 6G.2 open-type reciprocating compressor on freon. The compressor has a displacement of 126,8 m<sup>3</sup>/h at 1450 RPM and 153,0 m<sup>3</sup>/h at 1750 RPM.

\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

\*Optional we can also perform a new paint job and arrange the logistics.

